PRODUCT CATALOGUE

BITO. Smart. Top quality. Reliable. | shop.bito.com

✓ More than 5,000 top quality products direct from the manufacturer

- ✓ Superior customer service
- ✓ Technical advice at your premises

✓ Fast delivery service

5 %
ONLINE
DISCOUNT



The future needs roots.

Markets are constantly changing, technologies are evolving and new products are being developed.

It is therefore all the more important to rely on common values and principles that give us confidence and direction to keep up with this fast-paced world. With this in mind, BITO has always succeeded in seizing opportunities to constantly re-invent ourselves and grow throughout our long company history. Adaptability has always been our key to the future.

Our success would not have been possible without the commitment of our staff who have been sharing knowledge, experience and innovative ideas. Based on a sense of shared responsibilities and driven by a positive attitude toward performance, they made BITO who we are today:

Performance

Knowledge Innovation

Culture

Future Ready



Winfried Schmuck Managing Director

Winfried Schmuck Managing Director

BITO. Smart. Top quality. Reliable. | shop.bito.com



CONVENIENT **ORDERING**

Hotline: +49 6753 122-164 Fax: +49 6753 122-5839 E-Mail: info@bito.com Shop: www.bito.com

YOUR ONLINE BENEFITS:

- + more than 5000 products
- + convenient search functions
- + product configurator
- + comprehensive overview on storage & order picking systems
- + large number of reference projects complete with detailed description & ample illustration





Passionate about performance.

Benefit from 175 years of experience.



TOP QUALITY PRODUCTS

All BITO products are covered by a two-year warranty. We also give a five-year quality promise on many product lines, particularly on many bin & container series. You find these products marked by icons and warranty symbols in our catalogue and our online shop!



IN-DEPTH PROJECT PLANNING

We analyse your product structures, examine your storage and picking processes on site, and help you to select the right racking system and/or the ideal combination of a range of systems.

Our in-house design experts will develop the perfect solution tailored to suit your unique challenges and applications.



SUPPORT & ADVICE

Our technical support service provides indepth knowledge on all our products and can make recommendations based on BITO's long experience and industry know-how. Our expertise is available to you for anything from a single shelving unit to a complete storage and handling system. Just ask! Wherever you are, you are never too far to get one-to-one on-site advice and support.

You can pick up many of our high-quality products directly from our warehouses. Contact us now, we're here to help!



ASSEMBLY SERVICE

If you are short of time or staff to set up your shelving or racking installation, we will be pleased to assist you with the assembly.

Our professionally trained staff will take charge of setting up the delivered installation. In close cooperation with project managers and engineers, they ensure that assembly work is carried out efficiently and in line with all safety regulations. If requested, at a fixed price. Please ask - we'll be happy to help!



FAST DELIVERY SERVICE

As a supplier with over 5,000 items in our product range, we are able to offer you a wide range of products with short delivery times. Almost 90 per cent of all products ordered through our catalogue or our web shop are handed over to a carrier within 72 hours. We work with one of the largest and bestknown logistical service providers in Europe to deliver your products.

BITO Contents

BITO	Who we are 6 What we do 8
	Bins & Containers
	Shelving & Racking
Æ	Steps & Ladders 230 Shelving access ladders from aluminium 232 Mobile aluminium access platforms 240 Aluminium folding steps 234 Aluminium folding steps 241 Mobile aluminium access ladders 237 Aluminium platform steps 242 Mobile access platforms 238 Kick steps/ Step stools 243
	Shelving access ladders from aluminium

Contents



LEO Locative	Order picking trolleys	
Workstation systems		
Cabinets & Cupboards	Garment lockers	
Storage and order picking solutions	Pallet live storage PROflow	





Premier quality manufactured in our own plants...

In our plant at Meisenheim ...





... we manufacture shelving and racking for small, large, light weight and heavy weight, bulky and long goods, for load capacities ranging from 50 kg to 4.5 tons per storage level.



We rely on the latest technology ...

... for manufacturing all our shelving and racking systems. Steel profiling is carried out to the highest standard on the most advanced bending, punching and edging machines on the market. The high level of automation in our manufacturing process guarantees that all products are absolutely true to size and consistently maintain a high level of quality. Our most modern facilities guarantee short order lead times and a reliable time management for order processing.

Worldwide representation

With our subsidiaries in Europe, Asia and North America as well as partnerships in many other countries, we are always close to our customers!





In our plant at Lauterecken ...

... we manufacture storage, distribution and order picking bins and containers for use in any industry and for almost any requirement.

Customer specific demands ...

... are met by the BITO R&D department. Listening to your requirements and suggestions, our design and construction engineers coordinate the introduction of new bin and container types or a new feature to realise the optimum solution for your application – from the initial steps to the three-dimensional model, from the prototype to the final product ready to be manufactured in series. Moreover, our plant at Lauterecken also has the facilities to realise optional extras such as automated barcode labelling or milling and drilling drainage holes helping you to comply with fire prevention regulations.









Working for a sustainable future

What we do



Products from recyclable materials

BITO storage and order picking systems do not only help you optimise workflow in storage and order picking areas. Ecological sustainability is equally important for us. All metal and plastic products are made from recyclable materials. Plastic bins and containers which are no longer used, are returned to the material cycle by grinding them in our own milling facility. In many cases, modern technology opens up the possibility to re-use steel, too, and to create a closed loop for steel products.

Being strong advocates of a holistic approach to management, we constantly strive to harmonise the goals of the people who are working for and with our company with the goals of society and environmental demands.

Staff

Our key to success is ... our staff!


Our staff is our most valuable asset. This is why personnel development is highly valued at BITO. Our in-house academy offers a broad range of vocational training courses and courses for acquiring advanced qualification to allow our staff to keep up with the latest developments in their working environment. This offer is widened by numerous seminars encouraging personal development.

Meanwhile, vocational education options at BITO include almost 20 occupations in many trades and professions. Suitable qualification can be acquired through the whole range of educational offers ranging from an apprenticeship to an academic degree. Providing the opportunity of professional training to young people of our region is a valuable contribution to regional development.

Environmental protection

Production - clean and energy efficient

areas at an even level.





At BITO, we benefit from a closed water circuit with subsequent water treatment. Equally important to us is emission free manufacturing, for example during cold forming and injection moulding. Waste heat recovery facilities recycle machine heat by feeding it into the heating circuit for keeping ambient temperatures in work

All these measures help us to fully comply with the latest regulations on implementing energy saving and clean production processes.





Our contribution to society



Commercial enterprises are a part of society. They are expected to make a contribution to the benefit of all of us.

We sponsor cultural activities, youth programmes and sports events in our region. In close cooperation with clubs and social services, we make financial contributions to programmes for young people, organise cultural events and help to carry out special projects.

Your single source supplier



BITO — the one stop shop

Shelving & racking, bins & containers as well as matching accessories — BITO provides the full product range in the field of storage and order picking. From single shelving bays to compact pallet racking installations. From a small sized storage bin with pick opening to large volume containers. From write-on labels to hand pallet trucks.

The BITO product range offers more than just the basics for those who "only" need a shelving unit or a bin. It also includes the full range of components, the know-how and a competent concept-to-completion consultancy service for realising complex, state-of-the-art multi-system storage and order picking facilities.

Your advantage: each project will have a designated project manager so you will not be dealing with several persons.

Our shelving & racking range ...

... includes boltless and bolted shelving, shelving with extra large shelves, wide span and heavy duty shelving, pallet racking, cantilever racking, mobile shelving and racking, multi-tier facilities, carton and pallet live storage as well as automated storage installations.

Whether you opt for a conventional solution or an automated live storage installation – the BITO team will be pleased to assist you in making the right choice for your application.

Our bin & container range

Our comprehensive bin & container range is suited for a very broad spectrum of applications. Manufactured in an impressive choice of dimensions, the BITO range includes bins and containers for storage and order picking, containers in European standard dimensions, the successful multi-purpose container series, bins and trays for automated storage as well as pallet sized containers.





Our accessories ...

... such as workbenches, transport dollies, order picking and shelf trolleys, bins and cupboards, steps, labels, label holders and safety equipment top off our product range.

Whatever you will need for your warehouse or stockroom — you can rely on BITO for all your purchasing issues!







Storage, transport and order picking containers





BITO provides an impressive range of bins and containers for any application - from bins and containers for storage and order picking over various stacking container series in European standard sizes, multi-purpose containers, bins and trays for automated small parts facilities to pallet containers.

Our R&D design and construction engineers take pride in working out the optimum, customer-oriented solution. Backed by the most advanced technical facilities, our engineers are able to respond to specific customer demands and to coordinate the introduction of a new BITOBOX — from the initial steps to the three-dimensional, digital model, from the prototype to the final product ready to be manufactured in series.











BITOBOX







Contents

Our plastic bins and containers	14
Key to our symbols	15
Bin subdivision options	16
Storage bins with pick opening	18
Small parts storage bins and containers	18
Storage bins SK	18
Louvered panel kits complete with bins	20
Louvered panels	21
Bin racks and bin trolleys	23
Boltless shelving complete with SK bins	24
Storage bins PK	25
European size storage bins and containers .	26
European size stacking containers XL	26
European size stacking containers BN	28
Small parts storage	30
Supply chain logistics with C-item bins	30
C-item bins CTB	30
Storage and handling bins	34
Kanban bin shelving for small parts	
Storage and handling bins PK	35
Storage and handling bins RK	36
Boltless shelving complete with RK bins	40
Display storage systems	42
Tilt-open container modules	42
Stand alone tilt-open container cabinets	43
Modular stacking containers EMB.	44
Modular stacking containers EMB	44

Bins & containers

ERS

European size stacking containers	. 46
European size stacking containers XL	46
European size stacking containers XL	
with perforated base and sides	50
European size stacking containers XL	Ε0
with ribbed base RX	52
European size stacking containers XL with double base	53
Insert dividers	
Slot-in divider strips	54
Insert bins	55
Cut out moulded inserts for components or tools	56
European size stacking containers BN	58
Containers for automated systems	60
XLmotion containers for automated systems	
Actionion containers for automated systems	00
Small parts containers	. 62
Small parts containers KLT	62
Small parts containers KLT with ribbed base	66
Small parts containers KLT with double base	67
Insert bins	69
Trays	. 70
Steel trays	
Plastic trays	
Nesting and folding containers	72
Mesting and folding containers	. 12
Multi-purpose containers	
Multi-purpose containers MB	
Multi-purpose containers MB with ribbed base	
Multi-purpose containers MB with double base	
Multi-purpose containers MB Food & Delivery	80
Multi-purpose containers MB	00
- insulation accessories	82
Multi-purpose containers MB - Mail custom solution	82
04000 001400	02

Multi-purpose containers MB Eco	
Easy peel label holders	9
Folding containers	92
Folding boxes EQ	92
Folding distribution boxes MFB	96
Stack and nest containers	98
Stack and nest containers U-Turn	98
Stack and nest containers DSL	100
Stack and nest containers DST	101
Containers with fork entry shoes	
800 x 600	102
Multi-purpose containers	102
Multi-purpose containers MB	102
European size stacking containers	106
European size stacking containers XL	106
European size stacking containers XL with double base	107
Heavy duty containers	110
Heavy duty containers SL	110
Multi-trip transport solution	116
Pallet top cap and pallet dolly	116
Large volume containers	118
Pallet boxes	118
Pallet boxes	
Large volume nesting and folding containers	119
Folding pallet boxes	119
Folding bulk containers	120
Plastic pallets	121
Case studies	122



Our plastic bins and containers



BITO bins and containers: Top quality made in Germany



BITO bins and containers are produced in one of the most modern plants of the industry on high performance injection moulding machines with a clamping force of up to 27000 kN. After production, our bins and containers pass through our 600 sqm finishing centre where they are given the final touch to meet customer specific requirements. The entire manufacturing process combines high levels of automation with utmost versatility.



Marking and identification

Requests as to the application of logos and messages as well as bin and container identification are as diverse as our customers. The easiest way to realise these requests is by print-ons. BITO is able to do more than this: we offer all other options, too: from screen print, pad print, hot stamping and injection moulding to automated barcode labelling.



Welding, milling, riveting

The use of bins and containers in automated storage installations means observing very narrow tolerances, particularly in view of base deflection. With vibration welded double base containers from our finishing centre, we perfectly meet this requirement. Other bin and container features can also be provided without any difficulty - our modern CNC milling machines realise precision holes, drainage holes and slots as required.

Key to our symbols


Environmental compatibility



Plastic bins and containers not used anymore will be ground in a recycling facility. The regranulated material will then be used to manufacture special application products.

Bins and containers marked with this symbol are produced from plastic regranulate.







Many bin and container types are available in special colours when ordered in quantities of 200 and more. Call us!



BITO bins and containers marked with this symbol are safe for storing and transporting unpackaged foodstuffs. For safety reasons, you should always clean bins and containers before each contact with food.




Bins and containers marked with the ESD symbol are made from dissipative material to protect electronic parts and components from damage caused by sudden electrostatic discharge.



Copolymer polypropylene guarantees a long service life, is resistant to most acids and alkalis, organic solvents and greases. In addition, it is odourless, mild on skin, food safe and recyclable.



Recycled, granulated material. This symbol denotes that bins or containers have been manufactured from recycled polypropylene.



Polystyrene is a highly rigid material. Also available as transparent version.

Base deflection



Bins and containers used in automated storage and retrieval systems (AS/RS) must meet special requirements. One of the most important criteria for use on bin carriers or on conveyors is a strong base to minimize deflection. This symbol shows the maximum base deflection of our bins and containers with uniformly distributed loads handled at an ambient temperature of 23°C. It is assumed that bins and containers are handled long side on and placed onto support profiles in AS/RS facilities. Ask us for more details!



All indicated load capacities refer to an ambient temperature of 23°C. The dimensional stability of our bins and containers is also maintained during short cleaning processes within a specified temperature range. The symbol indicates limit temperatures.

Our plastic bins and containers

Bin subdivision options

Do your products need special protection? Do you need to increase packing density or is your automation technology unable to handle current structures? Would you like to increase storage efficiency by sorting items?

BITO provides many options to create a unique and cost-effective solution that is individually tailored to your needs.

- Smart subdivision
- Neat presentation
- Exact positioning
- Automation
- Compact storage
- Protection

FROM IDEA TO REALISATION -**EVERYTHING FROM A SINGLE SOURCE**

Divider systems

Slot-in dividers





Help you use bin space in the best possible way

- Can be adapted at any time
- Available in various height and length options
- Prices and delivery times upon request
- More information on page 54
- Easy to use and & affordable

Divider systems

Insertable bins



Guarantee that small items such as screws and bolts will not he mixed

- Easy bin subdivision and perfect fit
- Optimised grip solution for easy positioning and removal
- Insertable bins can also be subdivided and stacked
- Bins can be labelled to track deliveries
- More information on page 55 & 69

Divider systems

Customised solutions





It is possible to design individual partitioning solutions that allow to store as many parts as possible in a bin. These solutions allow to make full use of the bin volume and maximise packing density. Dividers can also be used as sorting aid to store different items in the same bin.

Our plastic bins and containers



Bin subdivision options









Workpiece carriers / load carriers



Workpiece carriers / load carriers

- Perfect fit into BITO plastic bins and containers
- Positioning accuracy guarantees a very high availability of products stored in automated storage systems
- High density storage increases the economic efficiency of a warehouse
- Better overview and cleanliness
- More economic than disposable packaging

Packaging solutions



Do you ship your goods through an external logistics provider and are your goods often damaged?

- BITO packaging solutions protect your valuable products from damage during transport, assembly and storage.
- The combination of BITO bins and containers and top quality materials for inlays ensures maximum quality and service life.
- Through creative ideas and a variety of materials and manufactoring technologies, we achieve a unique and cost-effective solution to suit your requirements.
- No disposable packaging required

Customised solutions







Do you have special requirements and have not yet found the right solution?

Contact us - WE will provide the solution!





Storage bins SK

Easy-to-view-'n-pick solution for small parts

- 9 variations in 5 base dimensions
- Straight sides and 90° corners allow good volume utilisation
- Integral moulded grips for safe handling
- The textured base and rounded edges ensure optimum travel characteristics on conveyors and in live storage systems
- Safe stacking due to positive locators on the stacking edge
- Sturdy corner design provides additional rigidity
- Supplied with 1 label card per container





External dimensions L x W x H	Internal dimensions L x W x H	Volume	Load	Stacking load	Bin type	Pcs/pack	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm	mm	litres	kg	kg						
85 x 102 x 50	69 x 90 x 43	0,3	1		SK1095	60	2-19578	2-19579	2-19580	2-19581
160 x 103 x 75	139 x 87 x 68	0,8	2		SK1610	40	2-1445	2-1448	2-1446	2-1447
230 x 150 x 125	199 x 129 x 116	3,0	5	35	SK2311	20	2-1449	2-1452	2-1450	2-1451
350 x 210 x 145	299 x 186 x 134	7,5	15	90	SK3521	10	2-1453	2-1456	2-1454	2-1455
350 x 210 x 200	299 x 186 x 188	10,0	20	90	SK3522	10	2-1457	2-1460	2-1458	2-1459
500 x 313 x 145	447 x 281 x 132	17,0	30	180	SK5031	8	2-1461	2-1464	2-1462	2-1463
500 x 313 x 200	447 x 281 x 186	24,0	35	180	SK5032	6	2-1465	2-1468	2-1466	2-1467
500 x 310 x 200 (R)	447 x 281 x 186	24,0	50	180	SK5032R	6	2-1469	2-1470		
500 x 313 x 300	448 x 282 x 286	36,0	35	150	SK5033	4	2-14896	2-14893	2-14895	2-14894

STORAGE BINS WITH PICK OPENING

Small parts storage bins and containers



Accessories




A Insertable windows















Label sheets

















Bin suspension rails

Pos.	Description		Accepts bin type	Product type	Pcs/ pack	Ref. no.
A	Insertable windows	made from transparent material, can be retro-fitted, permanently	SK 1610	ES1610	10	2-1108
		attached to container to avoid risk of loss, can also be opened when	SK 2311	ES2311	10	2-1109
		containers are stacked	SK 3521	ES3521	10	2-1110
			SK 3522	ES3522	10	2-1111
			SK 5031	ES5031	10	2-11969
			SK 5032	ES5032	10	2-1112
			SK 5033	ES5033	10	2-14578
В	Dust covers	from plexiglass, dustproof storage, dust cover and viewing window	SK2311	SD2311	10	2-1137
		in combination completely close a bin	SK3521, SK3522	SD352	10	2-1134
			SK5030, SK5031, SK5032	SD503	10	2-1136
C	Drop-on lids	from transparent polypropylene, optimum protection from dust, easy	SK 1095	VD1095	10	2-19545
		assembly, double function as dust cover and viewing window	SK 1610	VD1610	10	2-19870
			SK 2311	VD2311	10	2-30261
D	Longitudinal dividers	from polystyrene, colour: grey, can be retro-fitted, special holding	SK3521, SK3522	LT352	10	2-1074
		fixture prevents labels from slipping out, effortless slot-in fixing	SK5032, SK5033	LT5032	10	2-1075
A	Label sheets	pre-perforated blank label sheets, ready for direct printing, suited	SK1095	46-20773	1600	46-20773
	for laser and inkjet printers, on white DIN A4 sheets, 140 g/m ² ,	SK1610	46-20774	1000	46-20774	
		25 sheets per pack, colour white	SK2311, SK3521, SK3522	46-20775	400	46-20775
			SK5031, SK5032	46-20776	175	46-20776
			SK5033	46-20777	125	46-20777
B	Label covers	made from transparent material, protect large-size labels from	SK1095	SF1095	50	2-19547
		soiling and damage	SK1610	SF1610	50	2-1061
			SK2311, SK3521, SK3522	SF352	50	2-1063
			SK5031, SK5032	SF503	50	2-1066
			SK5033	SF5033	50	2-14897
G	Handles	from black PVC, supplied ready-mounted upon request; retro-fitting is possible after drilling two holes	SK5031, SK5032, SK5033	TS3	10	2-19527
(i)	Louvred panel	galvanised steel profiles, to be anchored to the wall, bin suspen-	L 1000 x W 35 x H 25 mm	CW1	1	8-5928
	uprights	sion rails can be adjusted in height anywhere along louvred panel uprights	L 2000 x W 35 x H 25 mm	CW2	1	8-5929
	Bin suspension rails	profiled hanging rail from galvanised steel complete with 2 connector plates and 4 bolts. Notches will accommodate 10 bins SK1095, 10 bins SK1610, 7 bins SK2311, 5 bins SK3521. Louvred panel capacity and dimensions: number of hanging rails = number of bins in a row + 1, panel height = bin height + 45 mm, panel width = 1126 mm)	SK1095, SK1610, SK2311, SK3521	16/1	1	8-7869



Louvered panel kits complete with bins

- Precision formed and finished in non-corrosive galvanised steel
- Easy wall mounting






Dimensions W x H	Features	Ref. no.	
mm			
457 x 495	16 x SK1610 (160 x 103 x 75 mm)	8-20178	
	3 x SK2311 (230 x 150 x 125 mm) 8 x SK1610 (160 x 103 x 75 mm)	8-14902	
457 x 991	32 x SK1610 (160 x 103 x 75 mm)	8-14903	
	16 x SK1610 (160 x 103 x 75 mm) 9 x SK2311 (230 x 150 x 125 mm)	8-20089	





Louvered panels

suited for wall and workbench mounting

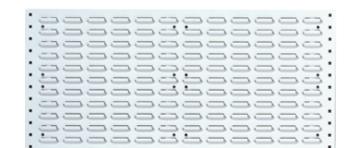

Suited for wall and workbench mounting

- Reinforcing profiles on the rear, can also be fitted to a desktop
- Easy-to-mount, hardwearing steel sheet panels
- Accept storage bins SK1095, SK1610 and SK2311

Width	Height	Ref. no.
mm	mm	
495	457	8-14833
991	457	8-14834
1486	457	8-14835

Suited for wall mounting

- Easy-to-mount, hardwearing steel sheet panels
- Accept storage bins SK1095, SK1610 and SK2311

Width	Height	Ref. no.
mm	mm	
457	495	8-14837
	991	8-14838
	1486	8-14839



Accessories



A Spigots for louvred panels

Pos.	Description	Dimensions	Pcs/pack	Ref. no.
		mm		
A	Spigots for louvred panels, round spigots for louvered panels	L 150	1	8-14841
		L 200	1	8-14842
		L 300	1	8-14843



Louvered panels

designed to fit your shelving













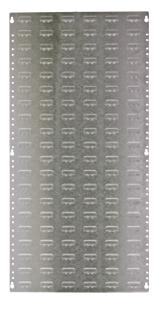

Fitted to shelving sides

For a shelving depth of	Height	Ref. no.
mm	mm	
300	1000	8-31329
400	1000	8-31330
500	500	8-31333
	1000	8-31331
600	1000	8-31332
Fixing material	pan head rivets, please order 6/12 pcs. per louvered panel (500 mm/1000 mm high) to fix panel to shelving	41-28460



Fitted to shelving back

For a shelf width of	Height	Ref. no.	
mm	mm		
1000	500	8-31326	
	1000	8-31327	
1300	1000	8-31328	
Fixing material	spring clips, please order 6/12 pcs. per louvered panel (500 mm/1000 mm high) to fix panel to shelving	10-12290	



Bin racks and bin trolleys

Instant product identification, easy access!

Bin trolleys

- Robust, welded steel construction, galvanised
- 1 push handle
- 2 swivel and 2 fixed castors, Ø 125 mm
- Easy self-assembly

Description	Dimensions H x W x D	Features	Ref. no.
	mm		
single sided use	1705 x 1130 x 510	56 x SK2311 blue	8-19515
		40 x SK1610 red	8-13422
		21 x SK2311 blue	
		10 x SK3521 red	
		35 x SK3521 red	8-19516
		60 x SK1610 red	8-19517
		28 x SK2311 blue	
		120 x SK1610 red	8-19514
double sided use	1705 x 1130 x 710	112 x SK2311 blue	8-19520
		80 x SK1610 red	8-13423
		42 x SK2311 blue	
		20 x SK3521 red	
		70 x SK3521 red	8-19521
		120 x SK1610 red	8-19522
		56 x SK2311 blue	
		240 x SK1610 red	8-19519



Bin racks

- Robust make
- Easy self-assembly
- Designed to accommodate several bin sizes for maximum use of space

Description	Dimensions H x W x D	Features	Ref. no.	
	mm			
single sided use	1885 x 1130 x 500	70 x SK2311 blue	8-19501	
		60 x SK1610 red	8-19504	
		42 x SK2311 blue		
		50 x SK1095 blue	8-19505	
		50 x SK1610 red		
		28 x SK2311 blue		
		40 x SK1095 blue	8-19503	
		40 x SK1610 red		
		21 x SK2311 blue		
		10 x SK3521 red		
		40 x SK1610 red	8-13420	
		21 x SK2311 blue		
		20 x SK3521 red		
		45 x SK3521 red	8-19502	
		150 x SK1610 red	8-19500	
double sided use	1885 x 1130 x 700	140 x SK2311 blue	8-19508	
		100 x SK1095 blue	8-19512	
		100 x SK1610 red		
		56 x SK2311 blue		
		120 x SK1610 red	8-19511	
		84 x SK2311 blue		
		80 x SK1095 blue	8-19510	
		80 x SK1610 red		
		42 x SK2311 blue		
		20 x SK3521 red		
		80 x SK1610 red	8-13421	
		42 x SK2311 blue		
		40 x SK3521 red		
		90 x SK3521 red	8-19509	
		300 x SK1610 red	8-19507	







Boltless shelving complete with SK bins

galvanised finish

Perfect combination

- Shelf load: 70 kg
- Bay load: 500 kg
- Shelving complete with SK bins
- Shelves can be retro-fitted with a retaining lip at the rear
- Assembly with beams and cross bracing
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments













i BITO info

Bin colours as illustrated. Other colours (blue, red, green, yellow) upon request!

With 40 storage bins SK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
10	40 x SK3521 (350 x 210 x 145 mm)	1850 x 900 x 324	10-53041	10-53042

With 32 storage bins SK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
8	16 x SK3521 (350 x 210 x 145 mm) 16 x SK3522 (350 x 210 x 200 mm)	1850 x 900 x 324	10-53043	10-53044

With 30 storage bins SK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
10	30 x SK5031 (500 x 315 x 145 mm)	1850 x 1000 x 524	10-53045	10-53046


With 28 storage bins SK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
7	28 x SK3522 (350 x 210 x 200 mm)	1850 x 900 x 324	10-53047	10-53048

With 21 storage bins SK

page 350

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
7	21 x SK5032 (500 x 315 x 200 mm)	1850 x 1000 x 524	10-53049	10-53050

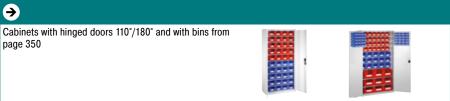



Storage bins PK

Budget bin range with a large storage capacity and useful accessories



BITOBOX PK



External dimensions L x W x H	Internal dimensions L x W x H	Volume	Material	Bin type	Description	Pcs/pack	Ref. no.	Ref. no.
mm	mm	litres						
350 x 210 x 145	295 x 185 x 134	7,5	PP	PK3		10	2-1416	2-1419
350 x 210 x 200	295 x 185 x 190	10,0	PP	PK401		10	2-1427	2-1430
500 x 310 x 200	442 x 282 x 187	24,0	PP	PK2		6	2-1412	2-1415
500 x 310 x 300	438 x 280 x 293	38,0	PE	PK1	including handle	4	2-1410	2-1411

Accessories







A Insertable windows

B Dust covers

Handles

Pos.	Description		Accepts bin type	Product type	Pcs/ pack	Ref. no.
A	Insertable windows	push-fit viewing windows increase filling volume by up to 25%	PK1	ES1	10	2-1113
			PK2	ES2	10	2-1114
			PK3	ES3	10	2-1115
			PK401	ES401	10	2-1116
3	Dust covers	from plexiglass, drop-on fitting on storage bins to keep off dust	PK1, PK2	SD1	10	2-1124
			PK3, PK401	SD3	10	2-1135
9	Handles	for convenient container handling, easy bolt-on fixing, from black PVC	PK2	TS2	10	2-15849



European size storage bins and containers


European size stacking containers XL

with view and pick opening

European size containers for storage, transport and order picking

- Large volume
- Ergonomically designed open hand grips
- Supplied with 1 label card per container
- Label holder on all four sides
- Pick opening with window from indestructible polycarbonate (see accessories)







With short side pick opening

400 x 300 mm


External dimensions L x W	Height	Internal dimensions L x W x H	Pick opening W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.	Ref. no.
mm	mm	mm	mm	litres	kg	kg			
400 x 300	170	368 x 268 x 167	212 x 81	15,0	15	200	XL43174	43-14979	43-14980
	220	368 x 268 x 217	212 x 106	19,0	20	200	XL43224	43-14981	43-14982
	270	368 x 268 x 267	212 x 131	24,0	20	200	XL43274	43-14983	43-14984
600 x 400	170	568 x 368 x 166	274 x 81	31,0	15	250	XL64174	43-14985	43-14986
	220	568 x 368 x 216	274 x 106	41,0	15	250	XL64224	43-14987	43-14988
	270	568 x 368 x 266	274 x 131	51,0	15	250	XL64274	43-14989	43-14990
	320	568 x 368 x 316	274 x 156	62,0	20	250	XL64324	43-14991	43-14992
	420	568 x 368 x 416	274 x 206	82,0	20	250	XL64424	43-14993	43-14994
800 x 600	220	762 x 562 x 215	459 x 103	86,0	60	500	XL86224		43-22598
	320	762 x 562 x 315	459 x 153	128,0	60	500	XL86324		43-22613
	420	762 x 562 x 415	459 x 203	170,0	60	500	XL86424		43-22560
	520	762 x 562 x 515	459 x 253	213,0	60	500	XL86524		43-22575

800 x 600 mm

600 x 400 mm

With long side pick opening

Long side pick opening ensures fast and easy retrieval

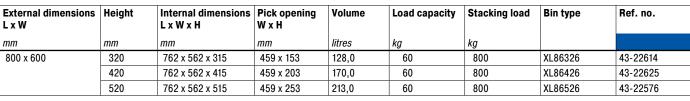




STORAGE BINS WITH PICK OPENING

European size storage bins and containers




Accessories









B Drop-on lids



C Drop-on lid



Handles







Labels



G Transport dolly



H Transport dolly

Pos.	Description		Colour	Accepts bin type	Product type	Pcs/ pack	Ref. no.
A	Insertable	provides protection against dust, made from polycar-	transparent	XL43174	ES43174XL	10	43-22536
•	windows	bonate to allow instant product viewing, easy product		XL43224	ES43224XL	10	43-18584
		retrieval, permanently attached to container to avoid risk of loss, can also be opened when containers are		XL43274	ES43274XL	10	43-18585
		stacked		XL64224	ES64224XL	10	43-18589
				XL64274	ES64274XL	10	43-18588
				XL64324	ES64324XL	10	43-18587
				XL64424	ES64424XL	10	43-18586
				XL86324/6	ES8632XL	10	43-20271
				XL86424/6	ES8642XL	10	43-22548
				XL86524/6	ES8652XL	10	43-30266
В	Drop-on lids	will cover container stacks, can also be used to close	blue	L 400 x W 300 mm	AD43	1	43-20303
		individual containers, suited for automated lidding and	red	L 400 x W 300 mm	AD43	1	43-20498
		strap-sealing	blue	L 600 x W 400 mm	AD64	1	43-20301
			red	L 600 x W 400 mm	AD64	1	43-20494
C	Drop-on lid	will cover container stacks, can also be used to close individual containers	grey	L 800 x W 600 mm	SLS86-46	1	52-30500
D	Handles	for convenient container handling, easy bolt-on fixing, can be retro-fitted, for short side pick openings only	black	400 x 300 mm	TS43XL	10	43-9409
				600 x 400 mm	TS64XL	10	43-9408
				800 x 600 mm	TS86XL	10	43-22624
3	Label sheets	pre-perforated blank label sheets, ready for direct print- ing, suited for laser and inkjet printers, on white DIN A4 sheets, 140 g/m², 25 sheets per pack, colour white	white	W 210 x H 74 mm	46-20778	100	46-20778
B	Label covers	label holder (PVC) with bent lip allows easy label insertion from the top, suited for all XL and KLT containers	water clear	KLT	KLT-ET1	10	9-20053
	Labels	white plastic cards, suited for all XL and KLT containers with a minimum height of 170 mm	white	W 210 x H 74 mm	XL21/74	50	43-14557
3	Transport dolly	complete with 4 swivel castors, designed for Euro-	RAL 5007 Bril-	L 620 x W 420 mm	TR64	1	43-1491
		pean size stacking containers: 1 x 600 x 400 mm or $2 \times 400 \times 300$ mm, framework from glassfibre reinforced polyamide	liant blue	L 620 x W 420 mm	TR64G	1	43-21883
Ð		supplied with 2 swivel and 2 fixed castors, suited for containers sized 800 x 600 mm, made from polypropylene		L 800 x W 600 mm	RU86.125	1	43-1150



European size storage bins and containers

European size stacking containers BN

with view and pick opening

Extremely sturdy range with European footprint

■ View and pick opening available on short side or on long side

- Ergonomically designed open hand grips
- Optional transparent plastic window available
- Carry / safety handle from black PVC (see accessories)
 - for short side pick opening only
- Label covers (see accessories)
- For loads of up to 50 kg
- Colour: blue



















BITOBOX BN





400 x 300 mm 600 x 400 mm

With short side pick opening

External dimensions L x W	Height	Internal dimensions L x W x H	Pick opening W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	mm	litres	kg	kg		
400 x 300	153	360 x 260 x 150	230 x 85	14	30	150	BN4314	4-1616
	215	360 x 260 x 211	230 x 117	20	40	150	BN4324	4-1288
	265	360 x 260 x 261	230 x 117	24	50	150	BN43264	4-1289
600 x 400	215	560 x 360 x 211	310 x 117	42	40	250	BN6424	4-1290
	315	560 x 360 x 311	310 x 155	62	50	250	BN6434	4-1286
	415	560 x 360 x 411	310 x 200	82	50	250	BN6444	4-1287



With long side pick opening

External dimensions L x W	Height	Internal dimensions L x W x H	Pick opening W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	mm	litres	kg	kg		
600 x 400	315	560 x 360 x 311	430 x 200	62	40	250	BN6436	4-1617
	415	560 x 360 x 411	430 x 230	82	40	250	BN6446	4-1618


European size storage bins and containers



Accessories







B Drop-on/clip-on lids



Handles



Label covers



Hinge clips for lids

Pos.	Description		Colour	Accepts bin type	Product type	Pcs/ pack	Ref. no.
A	Insertable	provides protection against dust, made from	transparent	BN43264	ES432	10	4-11716
	windows	plexiglass to allow instant product viewing -		BN6424	ES6424	10	4-10885
		easy product retrieval, permanently attached to container to avoid risk of loss, can also be opened when containers are stacked		BN6434	ES6434	10	4-1147
				BN6436	ES6436	10	4-11703
				BN6444	ES6444	10	4-1148
				BN6446	ES6446	10	4-11917
B	Drop-on/	reliable protection against soiling, containers remain fully stackable	blue	L 400 x W 300 mm	KD430	1	4-1152
	clip-on lids			L 600 x W 400 mm	KD640	1	4-1153
G	Handles	for convenient container handling, easy bolt-on fixing, can be retro-fitted, for short side pick openings only	black	400 x 300 mm	TS43XL	10	43-9409
				600 x 400 mm	TS64XL	10	43-9408
D	Label covers	can be retro-fitted, for 95 mm and 68 mm wide labels	water clear	except BD4314, BN6407	ET5	10	4-9454
(3	Hinge clips for lids	can be used with drop-on lids, clip-on lids and hinged lids, from white PVC, push-in fitting, 2 hinge clips = lid swings open, 4 hinge clips = lid is closed	white		DSV	100	4-1144

C-item bins CTB


Streamline your workflow with C-item bins!

C-item CTB bins combine the advantages of handling bins with all sides closed and storage bins with pick opening. On top of of this, CTB bins come in sizes that have been adapted to standard shelving dimensions.

All bins are supplied with a slide-down window as standard feature. The curved lip serves as carrying handle and as push & pull grip. The bin base is conveniently radiused for easy retrieval even of very small items. Optional extras such as product feeder panels, a safety bar and cross dividers improve handling convenience.

i www.mybitobox.com
Configure colours and logos online!





Slide-down window
The integral handle unites several functions: it can be used to carry bins, to push and pull bins stored in racks and it provides a large label area.



Front picking
By simply pushing down the window smaller quantities can be retrieved without having to pull the bin forward.



Top pickingFor retrieving larger quantities, the bin can be pulled forward and tilted; the carrying handle lifts automatically, preventing the bin from falling out and lowers when the bin is pushed back into the rack.




Slide-down window CSS
Prevents small items from spilling out
when the bin is tilted or the slide-down
window is pushed down.






C-item bins CTB

from sunflower compound (SFC), grey

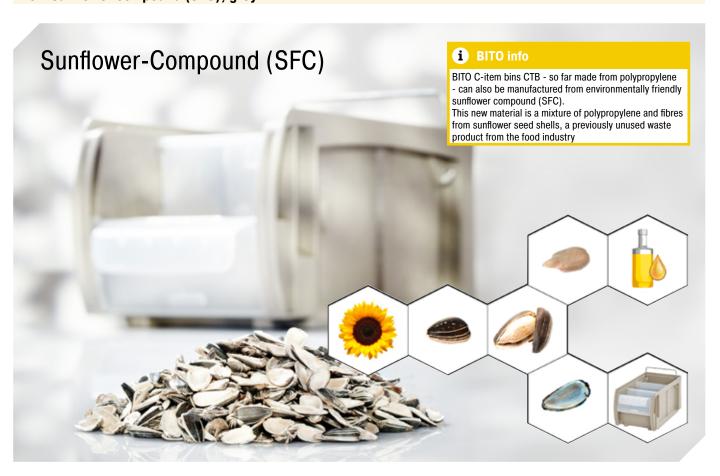

- ... made from resource-saving material!
- Opting for bins from sunflower compound means reducing your carbon footprint and saving energy
- Sunflower Compound is a waste product of the food industry that is now used for the benefit of the environment







From sunflower compound (SFC), grey

External dimensions L x W x H	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Pcs/pack	Ref. no.
mm	mm	litres	kg	kg			
300 x 156 x 140	250 x 127 x 129	4.1	15	100	CTB31514SFC	12	C0240-0005
400 x 156 x 140	350 x 127 x 129	5.7	15	100	CTB41514SFC	12	C0240-0006




C-item bins CTB

polypropylene (PP), dove blue

C-item bins – extremely robust, versatile and unmistakably BITO!

- Simply push down the window for picking smaller quantities without having to pull the bin forward
- Optional product feeder panel to prevent items from spilling out
- The container base is conveniently radiused for easy retrieval even of very small items
- Label holder on the back of the bin to accommodate Kanban cards
- Supplied with slide-down window as standard feature. The window with integral handle can also be also used to carry bins, to push and pull bins stored in racks and it provides a large label area.









Polypropylene (PP), dove blue

External dimensions L x W x H	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Pcs/pack	Ref. no.
mm	mm	litres	kg	kg			
300 x 156 x 140	250 x 127 x 129	4.1	15	100	CTB31514	12	53-31315
400 x 156 x 140	350 x 127 x 129	5.7	15	100	CTB41514	12	53-31316








Accessories







B Carry/safety handle



Cross dividers CQT



Easy peel label holders

Pos.	Description		Accepts bin type	Pcs/ pack	Ref. no.
A	Product feeder panels CDS	prevent small items from spilling out when bin the is tilted or the slide-down window is pushed down	CTB31514/ CTB41514	10	53-31304
В	Carry/safety handle	spring-mounted safety and carry handle, can be retro-fitted at any time, allows bins to be tilted forward and prevents them from falling; more convenient bin carrying, prevent bins from being pulled out of the shelving by accident, lowers automatically when bin is pushed into shelving or when weight is applied during stacking	RK*1509, CTB*1514	10	3-31314
C	Cross dividers CQT	cross dividers support the Kanban principle as they allow to create 2 picking pools in the same bin	CTB31514/ CTB41514	10	53-31303
D	Easy peel label holders	self-adhesive carrier foil for easy removal of stick-on labels from bin and container surfaces		100	53-31308
3	Dust covers CSD	dustproof storage, from transparent material	CTB31514	10	53-31341
			CTB41514	10	53-31342



Storage and handling bins

Kanban bin shelving for small parts

with bins, galvanised finish

Save space and time with the new BITO Kanban solution

- Shelf load: 150 kg ■ Bay load: 1250 kg
- Ideal for storing C-items
- Ultra flat shelves are real space savers
- Stores 25% more C-items and provides ergonomic access for order pickers
- All bins are supplied with a slide-down window as standard feature. For optional extras such as product feeder panels, cross dividers, safety bars and dust covers refer to CTB bin accessories.
- Shelves can be retro-fitted with a retaining lip at the rear



Width of

starter bay

1058 mm

Scan this QR code:

Width of

1008 mm

extension bay

Insertable bins

www.bito.com/web-kltek-de







Top picking

Front picking

						Shelf width	1000 mm	
						Shelving type	Starter bay	Extension bay
Shelving height	Number of shelves	Description	External bay depth	Useable depth	Features	Bay load	Ref. no.	Ref. no.
mm			mm	mm		kg		
1850	10	single sided use 3	324	300	60 x CTB31514 (300 x 156 x 140 mm)	1250	10-53005	10-53008
			424	400	60 x CTB41514 (400 x 156 x 140 mm)		10-53006	10-53009
		double sided use	624	600	120 x CTB31514 (300 x 156 x 140 mm)		10-53007	10-53010

Accessories



Additional shelves



Boltless shelving accessories from page 154

Pos.	Description		Load capacity	For a shelf width of	For a shelving depth of	Pcs/pack	Ref. no.
			kg	mm	mm		
A	Shelves, 25	shelf height 25 mm, with shelf perforations for	150	1000	300	1	10-C1165-0008
	mm high	dividers, supplied with 4 shelf clips, ultra flat			400	1	10-C1165-0011
		shelves help you make the most of your storage space			600	1	10-C1165-0017

Storage and handling bins




Storage and handling bins PK


Sloped bin front for immediate product identification

- Budget alternative to storage and handling bins RK
- Supplied with labels and label covers
- Optionally available as transparent version



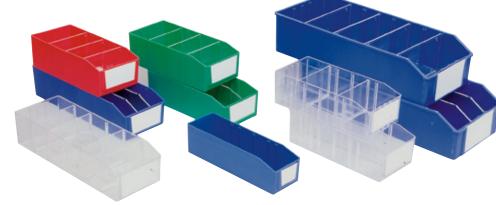







(Number of bins x-mm wide fitting on a 1000 mm long shelf)

Length	Width	Height	Internal dimensions L x W x H	Volume	Bin type	Pcs/	Colour	Ref. no.
						pack		
mm	mm	mm	mm	litres				
295	90	80	283 x 81 x 77	1.8	PK3091	35	blue	3-1421
	90	80	283 x 81 x 77	1.8	PK3090	35	water clear	3-1420
	136	90	283 x 125 x 87	3.1	PK3131	14	blue	3-1423
	136	90	283 x 125 x 87	3.1	PK3131	14	red	3-1425
	136	90	283 x 125 x 87	3.1	PK3131	14	green	3-1424
	136	90	283 x 125 x 87	3.1	PK3130	14	water clear	3-1422
395	136	90	381 x 125 x 87	4.2	PK4131	14	blue	3-1432
	136	90	381 x 125 x 87	4.2	PK4130	14	water clear	3-1431
500	230	115	486 x 210 x 111	9.2	PK351	14	blue	3-1426

Accessories





A Longitudinal dividers

B Cross dividers

Pos.	Description		Colour	Accepts bin type	Pcs/ pack	Ref. no.
A	Longitudinal	subdivide bins front-to-back into two or three	water clear	PK3130, PK3131	10	3-1073
	dividers	compartments	galvanised	PK351	10	3-1091
				PK4130, PK4131	10	3-1092
В	Cross dividers	dovetail grooves safely hold dividers in place	transparent	PK3130, PK3131, PK4130, PK4131	10	3-1099
				PK351	10	3-1102
				PK3090, PK3091	10	3-1097

Storage and handling bins

Storage and handling bins RK

Keep everything in the right place!

Designed to fit perfectly into BITO shelving, the storage and handling bin series RK is ideal for storing small items. The large storage volume, high rigidity and numerous accessories are further benefits. External hand grips and an optional support bar at the rear ensure convenient handling.



Product features



Handling

The handle and the integral grip allow excellent manual handling. 90° corners, snag-free internal sides and a flat base allow excellent volume utilisation.



Support bar

Retro-fitting the support bar for shelf use turns the bin into a drawer and prevents it from being pulled out by accident.



Stacking safety

Stacking safety is excellent due to the slightly prominent base edging and stacking rim on all sides and does not reduce with use of the lid and lifting/safety bar. Very high load capacity and stacking load.



TOP SELLE

Storage and handling bins

Storage and handling bins RK

Ideal for storing small items in a minimum of space and away from dust and dirt

■ Fit perfectly into BITO shelving systems

Comfortable and safe handling assists operational efficiency


■ Large inside volume

■ Excellent rigidity – safe stacking


Broad range of accessories

Supplied with 1 label card per container

■ Colour: dove blue

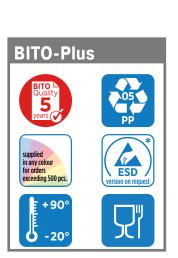





(Number of bins x-mm wide fitting on a 1000 mm long shelf)


Width	Height	Length	Volume	Load capac- ity	Stacking load	Internal dimensions L x W x H	Bin type	Pcs/ pack	Ref. no.
mm	mm	mm	litres	kg	kg	mm			
117	80	400	2.5	3	9	360 x 95 x 70	RK4108	16	3-19146
	90	300	2.0	2	6	260 x 94 x 80	RK3109	16	3-1433
	90	400	2.7	3	9	360 x 94 x 80	RK4109	16	3-1436
	90	500	3.5	4	12	460 x 94 x 80	RK5109	16	3-1439
	90	600	4.0	5	15	560 x 94 x 80	RK6109	16	3-1442
156	90	300	2.7	3	7	258 x 136 x 80	RK31509	12	3-22677
	90	400	3.8	4	8	358 x 136 x 80	RK41509	12	3-22678
	90	500	4.9	5	15	456 x 133 x 80	RK51509	12	3-22693
	90	600	6.0	6	18	556 x 133 x 80	RK61509	12	3-22695
234	80	400	5.3	6	20	356 x 214 x 70	RK4208	8	3-19145
	90	300	4.4	5	15	256 x 211 x 80	RK3209	8	3-1434
	90	400	6.0	6	20	356 x 211 x 80	RK4209	8	3-1437
	90	500	7.8	8	25	456 x 211 x 80	RK5209	8	3-1440
	90	600	9.4	10	30	556 x 211 x 80	RK6209	8	3-1443
	140	300	7.1	7	20	253 x 210 x 129	RK3214	6	3-1435
	140	400	9.9	10	30	353 x 210 x 129	RK4214	6	3-1438
	140	500	12.0	13	40	453 x 210 x 129	RK5214	6	3-1441
	140	600	15.0	15	45	553 x 210 x 129	RK6214	6	3-1444

Storage and handling bins RK

Accessories








B Longitudinal dividers



Carry/safety handle



Label sheets







Dust covers



Storage and handling bins



Pos.	Description		Accepts bin type	Product type	Pcs/ pack	Ref. no.
A	Cross dividers	from transparent material, label area adapted to size of computer	RK*108	QT108	10	3-19148
		printable labels, adjustable on a 44 mm pitch, dividers safely slot	RK*109	QT109	10	3-1588
		into dovetail grooves, radiused base for ease of component retrieval, even of very small items, supplied with label cards	RK*208	QT208	10	3-19147
		even of very small items, supplied with laber cards	RK*209	QT209	10	3-1590
			RK*214	QT214	10	3-1591
			RK*1509	QT1509	10	3-22676
В	Longitudinal dividers	solid longitudinal sheet divider, with grey beige coating, subdivide	RK3209	LT3209	10	3-1077
		bins front-to-back into two or three compartments	RK3214	LT3214	10	3-1078
			RK4208	LT4208	10	3-19066
			RK4209	LT4209	10	3-1079
			RK4214	LT4214	10	3-1080
			RK5209	LT5209	10	3-1081
			RK5214	LT5214	10	3-1082
			RK6209	LT6209	10	3-1083
			RK6214	LT6214	10	3-1084
			RK51509	LT51509	10	3-29370
			RK61509	LT61509	10	3-29372
	Carry/safety handle	spring-mounted safety and carry handle, can be retro-fitted at any	RK*109	TSB1	10	3-1514
	Carry/carety name	time, allows bins to be tilted forward and prevents them from falling;	RK*209, 214	TSB2	10	3-1515
		more convenient bin carrying, prevent bins from being pulled out of the shelving by accident, lowers automatically when bin is pushed into shelving or when weight is applied during stacking	RK*1509, CTB*1514	TSB3	10	3-31314
D	Label sheets	pre-perforated blank label sheets, ready for direct printing, suited	QT108, QT109	46-20766	675	46-20766
9		for laser and inkjet printers, on white DIN A4 sheets, 140 g/m², 25 sheets per pack, colour white	QT1509, QT208, QT209, QT214	46-20775	400	46-20775
			RK*108	46-20767	450	46-20767
			RK*109	46-20768	375	46-20768
			RK*208	46-20770	225	46-20770
			RK*209	46-20771	175	46-20771
			RK*214	46-20772	100	46-20772
			RK*1509	46-20769	250	46-20769
3	Label covers	made from transparent material, protect large-size labels from	RK*108	SF108	50	3-19140
_		soiling and damage	RK*109	SF109	50	3-1062
			RK*208	SF208	50	3-19142
			RK*209	SF209	50	3-1067
			RK*214	SF214	50	3-1068
			RK*1509	SF1509	50	3-22681
3	Dust covers	from plexiglass, with hand hole	RK3109	SD31	10	3-1126
			RK3209, RK3214	SD32	10	3-1127
			RK4109	SD41	10	3-1128
			RK4208, RK4209, RK4214		10	3-1129
			RK5109	SD51	10	3-1130
			RK5209, RK5214	SD52	10	3-1131
			RK6109	SD61	10	3-1132
			RK6209, RK6214	SD62	10	3-1133
			RK31509	SD315	10	3-30200
			RK41509	SD415	10	3-30201
			RK51509	SD515	10	3-30202
			RK61509	SD615	10	3-30203



Storage and handling bins

Boltless shelving complete with RK bins

galvanised finish

Large number of sizes to meet all needs

■ Shelf load: 70 kg ■ Bay load: 500 kg

■ Shelving complete with RK bins

Bin colour: dove blue Shelves can be retro-fitted with a retaining lip at the rear

Assembly with beams and cross bracing

Fast and easy assembly without bolts saves time

Extensions possible at any time

Shelf levels adjustable in 25 mm increments





With 64 storage and handling bins RK (3 sizes)

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
12	32 x RK3109 (300 x 117 x 90 mm) 16 x RK3209 (300 x 234 x 90 mm) 16 x RK3214 (300 x 234 x 140 mm)	1850 x 1000 x 324	10-53011	10-53012
	32 x RK4109 (400 x 117 x 90 mm) 16 x RK4209 (400 x 234 x 90 mm) 16 x RK4214 (400 x 234 x 140 mm)	1850 x 1000 x 424	10-53013	10-53014
	32 x RK5109 (500 x 117 x 90 mm) 16 x RK5209 (500 x 234 x 90 mm) 16 x RK5214 (500 x 234 x 140 mm)	1850 x 1000 x 524	10-53015	10-53016
	32 x RK6109 (600 x 117 x 90 mm) 16 x RK6209 (600 x 234 x 90 mm) 16 x RK6214 (600 x 234 x 140 mm)	1850 x 1000 x 624	12-21510	12-21511

Storage and handling

bins RK



With 40 storage and handling bins RK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		111111		
10	40 x RK3214 (300 x 234 x 140 mm)	1850 x 1000 x 324	10-53017	10-53018
	40 x RK4214 (400 x 234 x 140 mm)	1850 x 1000 x 424	10-53019	10-53020
	40 x RK5214 (500 x 234 x 140 mm)	1850 x 1000 x 524	10-53021	10-53022
	40 x RK6214 (600 x 234 x 140 mm)	1850 x 1000 x 624	10-53023	10-53024

Storage and handling bins




With 56 storage and handling bins RK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
14	56 x RK3209 (300 x 234 x 90 mm)	1850 x 1000 x 324	10-53025	10-53026
	56 x RK4209 (400 x 234 x 90 mm)	1850 x 1000 x 424	10-53027	10-53028
	56 x RK5209 (500 x 234 x 90 mm)	1850 x 1000 x 524	10-53029	10-53030
	56 x RK6209 (600 x 234 x 90 mm)	1850 x 1000 x 624	10-53031	10-53032



With 112 storage and handling bins RK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
14	112 x RK3109 (300 x 117 x 90 mm)	1850 x 1000 x 324	10-53033	10-53034
	112 x RK4109 (400 x 117 x 90 mm)	1850 x 1000 x 424	10-53035	10-53036
	112 x RK5109 (500 x 117 x 90 mm)	1850 x 1000 x 524	10-53037	10-53038
	112 x RK6109 (600 x 117 x 90 mm)	1850 x 1000 x 624	10-53039	10-53040

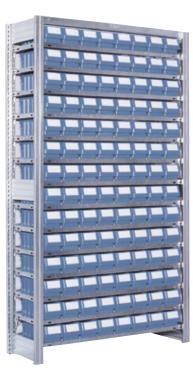

Accessories



A Shelf ledges

Pos.	Description		For a shelf width of	Ref. no.
			mm	
A	Shelf ledges	for 25 mm high shelves, to be inserted between shelf and shelf clips, the edge prevents loads from slipping, galvanised	1000	10-52182

Dustproof storage = clean products and easy inventory control

- Scratch-resistant and extremely durable
- Bins can be tilted forward from housing and can also be removed for easy filling
- Modules can be stacked or fixed to a louvered panel
- Solid design for a long service life
- Supplied with label cards



Tilt-open container modules



External dimensions W x H x D	Number of bins	Features	Ref. no.	Ref. no.
mm				
600 x 77 x 62	9	Klaka Set 9	7-14882	7-22607
600 x 113 x 91	6	Klaka Set 6	7-14880	7-22608
600 x 164 x 133	5	Klaka Set 5	7-14878	7-22609
600 x 207 x 168	4	Klaka Set 4	7-14876	7-22610
600 x 240 x 197	3	Klaka Set 3	7-14874	7-22611
600 x 353 x 299	2	Klaka Set 2	7-14872	7-22612



Individual containers for tilt-open container modules

External dimen- sions W x H x D	Number of bins	Features	Colour	Ref. no.
mm				
60 x 66 x 56	20	for Klaka Set 9	water clear	7-14883
93 x 100 x 84	20	for Klaka Set 6	water clear	7-14881
113 x 152 x 129	18	for Klaka Set 5	water clear	7-14879
142 x 190 x 165	8	for Klaka Set 4	water clear	7-14877
192 x 220 x 190	3	for Klaka Set 3	water clear	7-14875
288 x 338 x 285	2	for Klaka Set 2	water clear	7-14873

Display storage systems



Custom-assembled tilt-open container modules









External dimen- sions W x H x D	Features	Colour	Ref. no.
mm			
602 x 410 x 108	3 x Klaka Set 6	beige	7-14856
	2 x Klaka Set 9 2 x Klaka Set 6	beige	7-14855
605 x 671 x 171	2 x Klaka Set 9 1 x Klaka Set 6 1 x Klaka Set 5 1 x Klaka Set 4	beige	7-14858
605 x 955 x 171	2 x Klaka Set 9 2 x Klaka Set 6 2 x Klaka Set 5	beige	7-14859



For standard applications, we offer four modules complete with various size tilt-open containers. The modules are supplied fully assembled and carton-packed (mounted on a wood laminate board with white coating).

Stand alone tilt-open container cabinets

Sturdy wall mounted cabinets with ready-fixed Klaka kits

- Housing in silver grey or in blue
- Designed to accommodate 4 bin sizes to maximise use of space

Wall mounted tilt-open container cabinets

External dimensions W x H x D	Number of bins	Features	Ref. no.	Ref. no.
mm				
665 x 910 x 250	16	4 x Klaka Set 4	7-14868	7-14869
	33	3 x Klaka Set 6 3 x Klaka Set 5	7-14864	7-14865
	42	7 x Klaka Set 6	7-14866	7-14867
	69	5 x Klaka Set 9 4 x Klaka Set 6	7-14870	7-14871

Stand alone tilt-open container cabinets

External dimensions W x H x D	Number of bins	Features	Ref. no.	Ref. no.
mm				
665 x 2000 x 250	61	4 x Klaka Set 6 5 x Klaka Set 5 3 x Klaka Set 4	7-14862	7-14863
1270 x 2000 x 250	154	16 x Klaka Set 6 10 x Klaka Set 5 2 x Klaka Set 4	7-14860	7-14861









Modular stacking containers EMB


Compatibly sized to stack and interstack

EMB Stacking containers have been designed to support the Kanban principle in manufacturing and assembly environments and are also great for safely transporting items to other in-house workstations or to other companies in the supply chain of contract manufacturing business models. With a length of 600 mm, EMB containers are perfect for use in shelving with inclined shelves and on flow shelves of carton live storage installations.

Particular attention has been given to the "base geometry" featuring a pattern of stacking ribs that allows container stacking regardless of size. Even if a stack has been started with narrow-width containers, it is still possible to place broad-base containers on top without the need for de-stacking the existing pile and re-stacking it in the order of size.

Stacking rigidity is excellent and when moved, a container stack remains a stable unit. Unlike many other Kanban bins that often enough do not fit European size pallets, BITO EMB stacking containers make efficient use of the Euro pallet footprint.






Modular stacking baseAllows mixed-size stacking. It is also possible to stack larger containers on top of smaller containers.



Same height principle Container heights are coordinated so that a stack of two low-height containers has exactly the height of the largest container.



100% volume utilisation Integrated pocket handles on short sides, hence all container sides are closed.




Modular stacking containers EMB



Modular stacking containers EMB

Compatibly sized to stack and interstack

- Excellent rigidity safe stacking
- Large volume
- Smooth inside surfaces allow easy cleaning
- Ergonomically designed grips, comfortable to use when container is loaded





External dimensions L x W	Height	Internal dimensions L x W x H	Useable height	Volume	Load capacity	Stacking load	Bin type	Colour	Ref. no.
mm	mm	mm	mm	litres	kg	kg			
600 x 132	142,5	569 x 101 x 125	108	7.2	20	150	EMB611	blue	57-31563
600 x 266	142,5	569 x 227 x 125	108	16.2	20	150	EMB621	blue	57-31564
600 x 400	142,5	569 x 368 x 125	108	26.2	25	150	EMB641	blue	57-31565
600 x 400	270,0	566 x 368 x 253	186	52.7	30	300	EMB642	blue	57-31566

Accessories







B Covers for palletised loads



Slot-in divider strips



Transport dolly



Multi-trip transport solution for bins and containers

Pos.	Description		Pcs/pack	Ref. no.		
A	Document pockets	s ideal for frequent exchange of inserts, adhesive fabric backing provides strong adhesion, colour transparent				
В	Covers for palletised loads	cover palletised bins and containers	1	9-18421		
3	Slot-in divider strips	divider strips made from black recycled polypropylene, flexi dividers are supplied in standard lengths, can be cut to required length with a saw for wood or metals (additional charge for ready cut lengths)		43-18420		
				7-15509		
			10	43-18417		
			10	43-18419		
			10	43-18418		
	Transport dolly	complete with 4 swivel castors, designed for European size stacking containers: 1 x 600 x 400 mm or	1	43-1491		
		2 x 400 x 300 mm, framework from glassfibre reinforced polyamide	1	43-21883		
•	Multi-trip transport solution for bins and containers	can be moved without hand pallet truck or forklift truck, standard dimensions of 800 x 600 mm (1/2 Euro pallet)				



European size stacking containers XL

Our most versatile container sets standards!

European size stacking containers XL are supplied in a large choice of variations, are very versatile and have an extra large volume.

Ergonomically designed open hand grips are ideal for manual handling. In addition, a wide range of useful accessories

make this market favourite perfect for almost any











i www.mybitobox.com

Configure colours and logos online!

Base options




Standard base

The standard base will be your choice for loads of up to 30 kg.



Ribbed base

Ribbed base containers are perfect for loads of up to 50 kg. Base deflection is very low.



Ribbed base RX

Containers with a ribbed RX base carry up to 50 kg. Base deflection is very low. Diagonal outer base ribbing ensures excellent use on conveyors.



Double base

Double base containers take loads of up to 50 kg and only have a minimum base deflection.

Lid options



Snap locked lid

Suited for stacking containers XLD21121, ideal for shipping spare parts etc. Additional security tagging with KLTP tags possible.



Drop-on lid AD

Closes an individual container or a container stack and is suited for automated lidding and strap-sealing.



Drop-on lid ASDV

One-piece lid, hinged on one side and closed with 2 snap-on fixtures on the other side.



Hinged lid

Two-part lid suited for strap-sealing and security-tagging with KLTP security seals, excellent for distribution and transportation applications.

Options



Softtouch grips

Maximum convenience for manual handling. Available for stacking containers XL4317, XL4322, XL4327, XL6417, XL6422 and XL6427. Minimum order quantity 100 pcs per type. Please ask for a quote.



Water drainage holes

Supplied with drainage holes (compliant with fire protection directive VdS BG 4.3) upon request.



Company logos

Company logos and messages can be applied by injection moulding, screen printing, pad printing or hot foil stamping - please ask!



ESD version

Bins and containers marked with the ESD symbol are made from dissipative material to protect electronic parts and components from damage caused by sudden electrostatic discharge. Please ask.




European size stacking containers XL

Our all-rounder for a broad range of applications

■ Large volume

■ Ergonomically designed open hand grips (except for 120 mm high bins in base dimensions of 200 x 150 mm, 300 x 200 mm, 400 x 300 mm and 600 x 400 mm)

Several lid options















200 x 150 mm

300 x 200 mm

400 x 300 mm

600 x 400 mm

800 x 600 mm

Standard version



External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.	Ref. no.	Ref. no.
mm	mm	mm	litres	kg	kg				
200 x 150	120	168 x 118 x 117	1,9	10		XL21121	43-18533	43-15306	43-15305
300 x 200	120	268 x 168 x 117	3,5	15		XL32121	43-18532	43-15239	43-15238
	170	268 x 168 x 167	6,0	15		XL32171	43-30388	43-30389	C0290-0505
	220	268 x 168 x 217	8,0	15		XL32221	43-30390	43-30391	C0290-0552
400 x 300	120	368 x 268 x 117	9,8	30	250	XL43121	43-18510	43-15308	43-15307
	170	368 x 268 x 167	15,0	30	250	XL43171	43-18514	43-14506	C0290-0439
	220	368 x 268 x 217	19,0	30	250	XL43221	43-18520	43-14507	C0290-0553
	270	368 x 268 x 267	24,0	30	250	XL43271	43-18526	43-14508	C0290-0554
600 x 400	120	568 x 368 x 116	21,0	15	300	XL64121	43-18476	C0290-0583	C0290-0555
	170	568 x 368 x 166	31,0	15	300	XL64171	43-18480	43-14509	C0290-0347
	220	568 x 368 x 216	41,0	15	300	XL64221	43-18486	43-14510	C0290-0556
	270	568 x 368 x 266	51,0	15	300	XL64271	43-18492	43-14511	C0290-0252
	320	568 x 368 x 316	62,0	20	300	XL64321	43-18498	43-14512	C0290-0557
	420	568 x 368 x 416	82,0	20	300	XL64421	43-18504	43-14513	C0290-0558
800 x 600	120	762 x 562 x 115	43,0	60	800	XL86121	43-22586		
	220	762 x 562 x 215	86,0	60	800	XL86221	43-22594		
	320	762 x 562 x 315	128,0	60	800	XL86321	43-20259		
	420	762 x 562 x 415	170,0	60	800	XL86421	43-22555		
	520	762 x 562 x 515	213,0	60	800	XL86521	43-22570		





With hinged two-part lid

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.	Ref. no.	Ref. no.
mm	mm	mm	litres	kg	kg				
300 x 200	138	268 x 168 x 117	3,7	15		XLD32121	43-18583	43-30431	C0290-0586
	188	268 x 168 x 167	6,0	15		XLD32171	43-30403	43-30404	C0290-0326
	238	268 x 168 x 217	8,3	15		XLD32221	43-30405	43-30406	C0290-0559
400 x 300	138	368 x 268 x 117	10,0	30	250	XLD43121	43-18512	43-19879	C0290-0589
	188	368 x 268 x 167	15,0	30	250	XLD43171	43-18517	43-14514	C0290-0327
	238	368 x 268 x 217	20,0	30	250	XLD43221	43-18523	43-14515	C0290-0560
	288	368 x 268 x 267	25,0	30	250	XLD43271	43-18529	43-14516	C0290-0561
600 x 400	138	568 x 368 x 116	22,0	15	300	XLD64121	43-18478	C0290-0584	C0290-0562
	188	568 x 368 x 166	32,0	15	300	XLD64171	43-18483	43-14517	C0290-0563
	238	568 x 368 x 216	43,0	15	300	XLD64221	43-18489	43-14518	C0290-0564
	288	568 x 368 x 266	53,0	15	300	XLD64271	43-18495	43-14519	C0290-0313
	338	568 x 368 x 316	63,0	20	300	XLD64321	43-18501	43-14520	C0290-0565
	438	568 x 368 x 416	84,0	20	300	XLD64421	43-18507	43-14521	C0290-0566
800 x 600	138	762 x 562 x 115	43,0	60	800	XLD86121	43-22589		
	238	762 x 562 x 215	86,0	60	800	XLD86221	43-22599		
	338	762 x 562 x 315	128,0	60	800	XLD86321	43-20264		
	538	762 x 562 x 515	213,0	60	800	XLD86521	43-22577		
	438	762 x 562 x 415	170,0	60	800	XLD86421	43-22561		



Hinged on one side and closed with 2 snap-on fixtures on the other side

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load ca- pacity	Stacking load	Bin type	Ref. no.	Ref. no.	Ref. no.
mm	mm	mm	litres	kg	kg				
200 x 150	138	168 x 118 x 117	1,6	10		XLD21121	43-14294		
300 x 200	138	268 x 168 x 117	3,7	15		XL32121ASDV	43-31512	43-31513	C0290-0587
	188	268 x 168 x 167	6,0	15		XL32171ASDV	43-30411	43-30412	C0290-0570
	238	268 x 168 x 217	8,3	15		XL32221ASDV	43-30413	43-30414	C0290-0571
400 x 300	138	368 x 268 x 117	9,7	30	250	XL43121ASDV	43-22258	43-22267	C0290-0590
	188	368 x 268 x 167	14,0	30	250	XL43171ASDV	43-22259	43-22268	C0290-0572
	238	368 x 268 x 217	19,0	30	250	XL43221ASDV	43-22260	43-22269	C0290-0573
	288	368 x 268 x 267	24,0	30	250	XL43271ASDV	43-22261	43-22270	C0290-0574
600 x 400	138	568 x 368 x 116	20,0	15	300	XL64121ASDV	43-22252	C0290-0582	C0290-0575
	188	568 x 368 x 166	31,0	15	300	XL64171ASDV	43-22253	43-22262	C0290-0576
	238	568 x 368 x 216	41,0	15	300	XL64221ASDV	43-22254	43-22263	C0290-0577
	288	568 x 368 x 266	51,0	15	300	XL64271ASDV	43-22255	43-22264	C0290-0578
	338	568 x 368 x 316	61,0	20	300	XL64321ASDV	43-22256	43-22265	C0290-0579
	438	568 x 368 x 416	82,0	20	300	XL64421ASDV	43-22257	43-22266	C0290-0580



European size stacking containers XL with perforated base and sides

Light-weight and robust – with perforated sides to ensure optimum air flow

- Perforated base and sides
- Large volume
- Base ribbing prevents that goods are in direct contact to floor
- Ergonomically designed open hand grips (except for 120 mm high bins in base dimensions of 200 x 150 mm, 300 x 200 mm, 400 x 300 mm and 600 x 400 mm)
- Colour: blue





BITO-Plus

120 mm high containers are supplied with solid sides







400 x 300 mm

600 x 400 mm





With perforated base and perforated sides

External dimensions L x W	Height	Description	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm		mm	litres	kg	kg		
400 x 300	120	with perforated base and solid sides	368 x 268 x 102	8.3	35	250	XL43123	43-18511
	170	with perforated base and perforated sides	368 x 268 x 152	13	35	250	XL43173	43-18515
	220	with perforated base and perforated sides	368 x 268 x 202	18	35	250	XL43223	43-18521
	270	with perforated base and perforated sides	368 x 268 x 252	23	35	250	XL43273	43-18527
600 x 400	120	with perforated base and solid sides	568 x 368 x 102	18	35	300	XL64123	43-18477
	170	with perforated base and perforated sides	568 x 368 x 152	28	35	300	XL64173	43-18481
	220	with perforated base and perforated sides	568 x 368 x 202	38	35	300	XL64223	43-18487
	270	with perforated base and perforated sides	568 x 368 x 252	49	35	300	XL64273	43-18493
	320	with perforated base and perforated sides	568 x 368 x 302	59	35	300	XL64323	43-18499
	420	with perforated base and perforated sides	568 x 368 x 402	79	35	300	XL64423	43-18505

With hinged two-part lid


External dimensions L x W	Height	Description	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm		mm	litres	kg	kg		
400 x 300	188	with perforated base and perforated sides	368 x 268 x 152	14	35	250	XLD43173	43-18518
	238	with perforated base and perforated sides	368 x 268 x 202	19	35	250	XLD43223	43-18524
	288	with perforated base and perforated sides	368 x 268 x 252	23	35	250	XLD43273	43-18530
600 x 400	188	with perforated base and perforated sides	568 x 368 x 152	29	35	300	XLD64173	43-18484
	238	with perforated base and perforated sides	568 x 368 x 202	40	35	300	XLD64223	43-18490
	288	with perforated base and perforated sides	568 x 368 x 252	50	35	300	XLD64273	43-18496
	338	with perforated base and perforated sides	568 x 368 x 302	60	35	300	XLD64323	43-18502
	438	with perforated base and perforated sides	568 x 368 x 402	81	35	300	XLD64423	43-18508



European size stacking containers XL with ribbed base RX

Reinforced corners and base ribbing provide strength and high stability – ideal for automated bin storage

- Outer base ribbing for quiet travel on conveyors
- Large volume
- Ergonomically designed open hand grips (except for 120 mm high bins in base dimensions of 200 x 150 mm, 300 x 200 mm, 400 x 300 mm and 600 x 400 mm)
- Open hand grips are optionally available with soft touch cushioning
- Ideal for use in automated bin storage
- Optionally available with drainage holes in the base
- Colour: blue

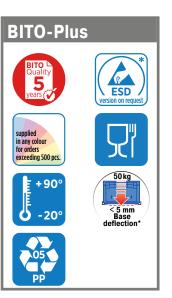


i BITO info

*All values assume an ambient temperature of 23°C, long side-on container handling and uniformly distributed loads.

Also suited for automated small parts storage.

Outer diagonal base ribbing ensures quiet travel on conveyors.



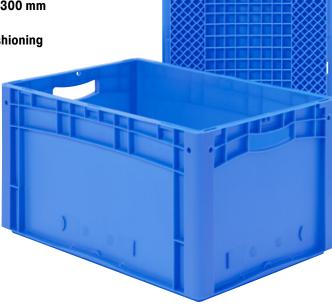








External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
600 x 400	120	568 x 368 x 102	18	50	300	XL64121RX	43-30204
	170	568 x 368 x 152	28	50	300	XL64171RX	43-30205
	220	568 x 368 x 202	38	50	300	XL64221RX	43-30206
	270	568 x 368 x 252	49	50	300	XL64271RX	43-30207
	320	568 x 368 x 302	60	50	300	XL64321RX	43-30208
	420	568 x 368 x 402	79	50	300	XL64421RX	43-22584

With hinged two-part lid

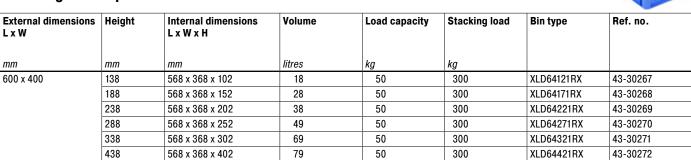



reddot



European size stacking containers XL with double base

Ideal for handling heavy loads – ideal for automated storage

- Extremely quiet travel on all types of conveyors
- Flat outer base avoids accumulation of dirt
- Large volume
- Ergonomically designed open hand grips (except for 120 mm high bins in base dimensions of 200 x 150 mm, 300 x 200 mm, 400 x 300 mm and 600 x 400 mm)
- Open hand grips are optionally available with soft touch cushioning
- All containers can be subdivided to suit individual requirements
- Ideal for use in automated bin storage
- Optionally available with drainage holes in the base
- Colour: blue

BITO-Plus

supplied in any colour for orders









600 x 400 mm

Load capacity in automated small parts storage, BITO

type "AKL": base deflection < 5 mm. Load capacity in compliance with EN13117: max. base deflection 3% measured along diagonal base line

*All values assume an ambient temperature of 23°C, long side-on container handling and uniformly distributed loads.





External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity AKL	Load capacity EN13117	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg	kg		
600 x 400	120	568 x 368 x 102	19	50	100	300	XL64121D	43-19029
	170	568 x 368 x 152	29	50	100	300	XL64171D	43-19030
	220	568 x 368 x 202	40	50	100	300	XL64221D	43-19031
	270	568 x 368 x 252	50	50	100	300	XL64271D	43-19032
	320	568 x 368 x 302	60	50	100	300	XL64321D	43-18707
	420	568 x 368 x 402	81	50	100	300	XL64421D	43-19033
800 x 600	120	762 x 562 x 101	36	80	200	800	XL86121D	43-22588
	220	762 x 562 x 201	79	80	200	800	XL86221D	43-22597
-	320	762 x 562 x 301	121	80	200	800	XL86321D	43-20261
	420	762 x 562 x 401	164	80	200	800	XL86421D	43-22559
	520	762 x 562 x 501	206	80	200	800	XL86521D	43-22574

With hinged two-part lid

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity AKL	Load capacity EN13117	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg	kg		
600 x 400	138	568 x 368 x 102	19	50	100	300	XLD64121D	43-14300
	188	568 x 368 x 152	29	50	100	300	XLD64171D	43-14302
	238	568 x 368 x 202	40	50	100	300	XLD64221D	43-14304
	288	568 x 368 x 252	50	50	100	300	XLD64271D	43-14306
	338	568 x 368 x 302	60	50	100	300	XLD64321D	43-14308
	438	568 x 368 x 402	81	50	100	300	XLD64421D	43-14310
800 x 600	138	762 x 562 x 101	36	80	200	800	XLD86121D	43-22591
	238	762 x 562 x 201	79	80	200	800	XLD86221D	43-22602
	338	762 x 562 x 301	121	80	200	800	XLD86321D	43-20265
	438	762 x 562 x 401	164	80	200	800	XLD86421D	43-22565
	538	762 x 562 x 501	206	80	200	800	XLD86521D	43-22581









Insert dividers




Easy to assemble in three steps

- Allow to subdivide containers as required
- Can be removed at any time
- Every divider (10 mm thick) is supplied with 2 side caps
- Insert dividers can be screw-fixed or riveted
- Height options: 80, 130, 180, 230 mm, other heights upon request
- Prices and delivery periods upon request









A: Side caps B: Twin wall divider, 10 mm thick

i BITO info

Easy to assemble in three steps:

The side caps have small nubs on the outside that perfectly fit into the drill holes in the container side. Containers can be supplied with drill holes, however it is also possible to drill holes later on.

Step 2

First plug in one side of the divider into the container drill holes.

Step 3

Then fix the other side of the divider to the container.

Spreading elements inside the divider caps ensure a firm fit and prevent loss.

Slot-in divider strips



Subdivide containers to suit product requirements!

- Made from black recycled polypropylene
- Flexi dividers are supplied in standard lengths
- Can be cut to required length with a saw for wood or metals (additional charge for ready cut lengths)



For European size stacking containers BN/XL and small parts containers KLT

Length	Height	Material thickness	Product type	Pcs/pack	Ref. no.
mm	mm	mm			
950	55	10	SSU55/11	10	43-18419
	120	10	SSU120/11	10	43-18420
1150	50	5	SSU50/5	10	43-18417
	80	5	SSU80/5	10	43-18418
	180	5	SSU180/5	10	7-15509



Insert bins

type EK

Make maximum use of space and stock several references in the same bin!

- For easy subdivision and full use of space
- Optimised grip solution for easy positioning and removal
- Further subdivision, stackable





Type EK, for European size stacking containers XL

	To suit containers sized L x W	Format	External dimensions L x W x H	Volume	Bin type	Colour	Pcs/ pack	Ref. no.
	mm		mm	litres				
1/2 crosswise 1/4	400 x 300	1/4	178 x 129 x 90	1.7	EK17129XL	black	32	43-20001
EK25179XL EK171	29XL	1/2 crosswise	258 x 178 x 90	3.5	EK25179XL	black	16	43-20005
1/4 EK171		1.0	470 400 00	1.0	EV47400VI		00	40,40000
	600 x 400	1/8	178 x 139 x 90	1.8	EK17139XL	black	32	43-19999
1/8 EK17139XL EK3252 EK17139XL	79XL	1/4	277 x 178 x 90	3.7	EK27179XL	black	16	43-20003
% \(\text{\frac{\text{\tin\text{\texi}\text{\text{\text{\text{\text{\text{\text{\text{\text{\texi\texi}\\ \text{\text{\texi}\tint{\text{\texi}\text{\text{\texi}\tint{\text{\text{\texi}		1/2 crosswise	358 x 277 x 90	7.6	EK35279XL	black	8	43-20007
1/2 lengthwise EK55179XL		1/2 lengthwise	557 x 178 x 90	7.6	EK55179XL	black	8	43-19998

Accessories







A Cross dividers

B Longitudinal dividers

Dust covers

Pos.	Description		Accepts bin type	Pcs/pack	Ref. no.
A	Cross dividers	allow further subdivision of insertable bins	EK17129KLT, EK17129XL, EK17139XL, EK25179XL, EK26179KLT, EK27179XL, EK53179KLT, EK55179XL	10	9-16502
			EK35279XL	10	9-16755
3	Longitudinal dividers		EK25169KLT, EK25179XL	10	9-16772
			EK27179XL	10	43-16774
			EK35269KLT, EK35279XL	10	9-16775
			EK55179XL	10	43-16777
	Dust covers	reliable protection against	EK17129KLT, EK17129XL	10	9-16870
		soiling, containers remain fully	EK17139XL	10	43-16871
		stackable	EK25179XL	10	43-16880
			EK17139XL	10	43-16878
			EK35279XL	10	43-16876
			EK55179XL	10	43-16874



Insert bins

type EEK

Make maximum use of space and stock several references in the same bin!

- For easy subdivision and full use of space
- With inward pointing integral ledges for convenient handling





Type EEK, for European size stacking containers XL

1/4 EEK27171 EEK27111		1/2 crosswise EEK35213XL
1/2 length EEK55176	wise	

To suit contain- ers sized L x W	Format	External dimensions L x W x H	Volume	Bin type	Colour	Pcs/ pack	Ref. no.
mm		mm	litres				
600 x 400	1/8	178 x 138 x 85	1.7	EEK17138XL	black	32	43-31322
	1/8	179 x 138 x 133	2.8	EEK17113XL	black	16	43-22687
	1/4	279 x 179 x 85	3.6	EEK27178XL	black	16	43-22540
	1/4	277 x 178 x 133	6.0	EEK27113XL	black	8	43-22686
	1/2 crosswise	358 x 277 x 85	7.4	EEK35278XL	black	8	43-31324
	1/2 crosswise	358 x 277 x 133	11.0	EEK35213XL	black	4	43-22685
	1/2 lengthwise	558 x 179 x 85	7.4	EEK55178XL	black	8	43-22537
	1/2 lengthwise	557 x 178 x 133	11.7	EEK55113XL	black	4	43-31325

Cut out moulded inserts for components or tools

Everything within easy reach!

- Polystyrene tool inlays for order quantities from 500 pcs
- Our versatile tool system keeps tool costs low
- Material thickness between 2 and 5 mm, tool heights of up to 120 mm depending on material thickness
- Prices and delivery by quotation
- Designed to fit your tool
- Various colours and dissipative ESD versions can be supplied



For XL containers sized 400 x 300 mm and 600 x 400 mm



For KLT containers sized 400 x 300 mm and 600 x 400 mm



Accessories









A Drop-on lids



B Drop-on lid

Security seals



Security seals



E Label sheets



E Label covers



G Transport dolly



Transport dolly



Covers for palletised loads

Add-on fork entry shoes

K Grip closures

Bag holder rails

os.	Description		Colour	Dimensions	Product	Pcs/	Ref. no.
' 05.	Description		Colour	Dimensions	type	pack	Ket. no.
				mm			
A	Drop-on lids	will cover container stacks, can also be used to close individual contain-	blue	L 300 x W 200	AD32XL	1	43-30392
		ers, suited for automated lidding and strap-sealing		L 300 x W 200	AD32XL	1	43-30393
				L 400 x W 300	AD43	1	43-20303
			red	L 400 x W 300	AD43	1	43-20498
			blue	L 600 x W 400	AD64	1	43-2030
			red	L 600 x W 400	AD64	1	43-20494
			grey	L 200 x W 150	AD21	1	43-30209
В	Drop-on lid	will cover container stacks, can also be used to close individual containers	grey	L 800 x W 600	SLS86-46	1	52-30500
C	Security seals	tear-off security seals, suited for all XL and KLT containers except for containers sized 800 x 600 mm, colour: red	red		KLTP	500	9-16271
D		single use security seals, suited for all MB and XL containers sized 800 x 600 mm at the base, tamper evident seals to inhibit theft, 2 security tags required per container, colour: red, messages and customised colours upon request	red		MBP2	500	6-15705
3	Label sheets	pre-perforated blank label sheets, ready for direct printing, suited for laser and inkjet printers, on white DIN A4 sheets, 140 g/m², 25 sheets per pack, colour white	white	W 210 x H 74	46-20778	100	46-20778
B	Label covers	label holder (PVC) with bent lip allows easy label insertion from the top, suited for all XL and KLT containers	water clear	W 209 x H 67	KLT-ET1	10	9-20053
		label holder (PVC) with bent lip allows easy label insertion from the top, suited for all KLT containers with a minimum height of 170 mm and for XL containers sized 600 x 400 mm and a minimum height of 220 mm	water clear	W 218 x H 80	KLT-ET2	10	9-20054
G	Transport dolly	complete with 4 swivel castors, designed for European size stacking containers: 1 x 600 x 400 mm or 2 x 400 x 300 mm, framework from	RAL 5007 Bril- liant blue	L 620 x W 420	TR64	1	43-1491
		glassfibre reinforced polyamide	RAL 5007 Bril- liant blue	L 620 x W 420	TR64G	1	43-21883
		supplied with 2 swivel and 2 fixed castors, suited for containers sized 800 x 600 mm, made from polypropylene	RAL 5007 Bril- liant blue	L 800 x W 600	RU86.125	1	43-1150
	Covers for palletised loads	cover palletised bins and containers	black	L 1220 x W 820	PAH12.80	1	9-18421
D	Add-on fork entry shoes	easy to mount and to remove, can be easily retro-fitted by bolt-on fitting to double base containers, kit includes 2 runners and 10 bolts	grey		43-20273	1	43-20273
K	Grip closures	suited for European size stacking containers XL with a height of up to 270 mm except for containers sized 800 x 600 mm, easy clip-in fixing to close open handgrips	grey		GV-XL270	1	43-31450
		suited for European size stacking containers XL with a height of 320 and 420 mm except for containers sized 800 x 600 mm, easy clip-in fixing to close open handgrips	grey		GV-XL320	1	43-31448
D	Bag holder rails	clip-on fitting to MB, XL and KLT containers, holds bags open for easy filling, can be retro-fitted, demountable, colour: grey (picture shows customised color)	grey		MB-BR64D	1	6-31553



European size stacking containers BN

The European size classic for heavy loads

- Extremely sturdy containers with European footprint
- Available with solid or with perforated sides
- All containers come with a closed base as standard
- Large volume
- Ergonomically designed open hand grips
- Also available with view and pick opening
- Colour: blue













With perforated sides

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
400 x 300	153	360 x 260 x 150	14	30	200	BN4312	4-1279
	215	360 x 260 x 211	20	40	200	BN4322	4-1280
	265	360 x 260 x 261	24	50	250	BN43262	4-1281
600 x 400	130	560 x 360 x 126	25	25	400	BN6412	4-1282
	215	560 x 360 x 211	42	30	400	BN6422	4-1283
	315	560 x 360 x 311	62	40	400	BN6432	4-1284
	415	560 x 360 x 411	82	40	400	BN6442	4-1285



With solid sides

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
300 x 200	153	261 x 161 x 150	6	14		BN321	4-1270
400 x 300	153	360 x 260 x 150	14	30	250	BN4311	4-1271
	215	360 x 260 x 211	20	50	250	BN4321	4-1272
	265	360 x 260 x 261	24	50	250	BN43261	4-1273
600 x 400	78	560 x 360 x 74	15	20	400	BN6407	4-1274
	130	560 x 360 x 126	25	30	500	BN6411	4-1275
	215	560 x 360 x 211	42	40	500	BN6421	4-1276
	315	560 x 360 x 311	62	50	500	BN6431	4-1277
	415	560 x 360 x 411	82	50	500	BN6441	4-1278



Accessories



A Grip closures



B Drop-on/clip-on lids



Document clips



Hinge clips for lids



Label covers




Label covers



G Transport dolly




Slot-in divider strips



Collars



Multi-trip transport solution for bins and containers

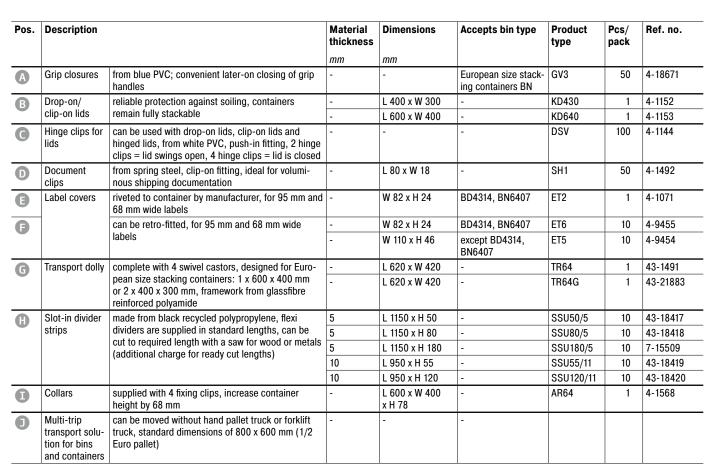



Containers for automated systems

XLmotion containers for automated systems

Designed for automated storage & handling

The BITOBOX XLmotion is the no-compromise solution for automated systems, whether for automated bin or tray storage, shuttle-assisted solutions or for conveyor handling.

The new base design features a closed, perfectly flat outer frame around an open ribbed area for enhanced rigidity and almost noiseless travelling on conveyors. Operators will appreciate substantially reduced noise levels!

Optionally available dividers allow front to back or side to side container subdivision. Options range from 2 up to 16 compartments. The dividers safely connect to the container base and are easy to fit and to remove.

The sides are perfectly straight to allow a very good cube utilisation. The base design helps to reduce noise development on conveyors and to minimise investment in steel by allowing narrow-width seat profiles in AS/RS facilities. In view of these advantages, we decided that we should pass up on stacking compatibility with European standard size containers.

On top of this, the sides and corners of BITO XLmotion containers can be further customised. Minimum order quantities apply. Please note that XLmotion totes are compatible with all standard automated handling systems on the market.





Containers for automated systems




- Large-capacity container
- Optional slots to fix dividers
- Optional drainage holes in the base and/or the short sides
- 4 Open or closed grip holes on the short sides
- Closed grips on the long sides
- 6 Ribbing can be adapted to customer AS/RS and conveyor requirements
- New base design keeps travelling noise to an absolute minimum




Product features



New base design featuring diagonal support ribbing in the centre and a double-base edge provides high rigidity and low-noise travelling on conveyors.




This silent runner substantially reduces noise levels in your warehouse!



A wider base than is usual for European standard size stacking containers (389 mm instead of 363 mm) allows cutting down on the steelwork cost of AS/RS facilities.



All XLmotion containers can be subdivided into 2 up to 16 compartments with inexpensive, slim yet robust dividers. Dividers have a firm fit and can be easily inserted or removed.

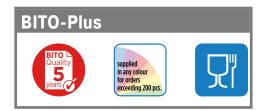





Scan this QR code:

Product video BITOBOX XLmotion


www.bito.com/ vid-xlmotionaudio-de







1/4		



1/16		

Optional dividers for subdivision into 2 up to 16 compartments, dividers have a firm fit and are easy to insert or remove.

External dimensions L x W	Height	Internal dimensions L x W x H	Base width	Width of non-ribbed surface	Volume	Load capacity	Stacking load	Ref. no.
mm	mm	mm	mm	mm	litres	kg	kg	
599 x 399	120	569 x 369 x 102	389	min. 100	25	50	250	55-31534
599 x 399	170	569 x 369 x 152	389	min. 100	32	50	250	55-31533
599 x 399	220	569 x 369 x 202	389	min. 100	42	50	250	55-31397
599 x 399	270	569 x 369 x 252	389	min. 100	53	50	250	55-31377
599 x 399	320	569 x 369 x 302	389	min. 100	63	50	250	55-31398



Small parts containers KLT

Ideal for automated bin storage

When rigidity is key...


The BITO KLT series meets the requirements of a modern warehouse environment in an ideal way. Featuring a sturdy corner design and three base variations, the container series can also be used for handling heavy loads. Ribbed base and double base KLT containers provide excellent rigidity, making them perfect for use in AS/RS systems.



Small parts containers



- Opening to place hinge clip
- 2 Drainage holes
- 3 Opening for security seals or cable ties
- 4 Location hole for lifting devices
- 6 Hinged lid
- 6 Ergonomically designed hand grip
- Integral groove for automated pulling
- 8 Optional: location for transponder accommodation
- Location for position control devices
- Area for label holders and document pockets
- Container centering holes
- Ideal surface for belt conveying
- Marking space for messages applied by pad print, hot foil stamping or injection moulding

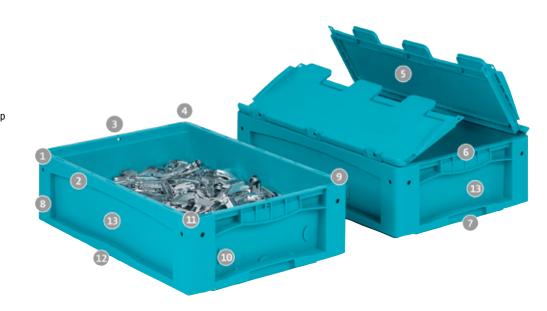

i

i www.mybitobox.com

Configure colours and logos online!

Suited for ...



Use on conveyors

Smooth operation on all conveyor types. Excellent travel characteristics on roller tracks and roller conveyor lanes, on belt and chain conveyors, on transfer conveyors etc.



Storage/order picking

Ideal for order picking and storage in manually serviced or in automated facilities. Particularly suited for carton live storage and AS/RS systems.



Transport

Perfectly adapted to all common pallet sizes on the market for optimum use of loading space. Very good stacking stability with loads up to 500 kg, regardless of whether containers are stacked with lid or without lid.



Manual handling

Ergonomically designed hand grips for easy lifting and carrying, even if containers are full loaded.

Base options



Standard base

Maximum base deflection 3% (measured along diagonal base line) for loads of 30 to 50 kg (depending on container size). All values assume uniformly distributed loads, an ambient temperature of 23 °C and long-side on handling in automated storage facilities!



Ribbed base

Maximum base deflection ≤ 1 mm for loads up to 50 kg.

All values assume uniformly distributed loads, an ambient temperature of 23 °C and long-side on handling in automated storage facilities!



Double base

Maximum base deflection \leq 1 mm for loads up to 75 kg.

All values assume uniformly distributed loads, an ambient temperature of 23 °C and long-side on handling in automated storage facilities!

Stacking safety



Safe stacking

Compatible with all established stacking container and VDA container brands. Excellent stacking safety with and without lid.

Small parts containers KLT

For any application where material stability is important

- Closed sides without grip opening ensure 100% volume utilisation
- Excellent stacking safety with lid and without lid
- Perfect for use on conveyors, storage and order picking, transport and manual handling
- Ergonomically designed grips, comfortable to use when container is loaded
- Fixtures for labels and document pockets
- Colour: turquoise









600 x 400 mm

400 x 300 mm

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
400 x 300	120	341 x 268 x 116	8.9	25*	300	KLT43120	9-18464
	170	341 x 268 x 166	13	25*	300	KLT43170	9-18470
	220	341 x 268 x 216	17	50	300	KLT43220	9-16794
	270	341 x 268 x 266	22	50	300	KLT43270	9-16801
600 x 400	120	541 x 368 x 116	19	30	500	KLT64120	9-16096
	170	541 x 368 x 166	29	30	500	KLT64170	9-16805
	220	541 x 368 x 216	39	40	500	KLT64220	9-16273
	270	541 x 368 x 266	48	50	500	KLT64270	9-16809
	320	541 x 368 x 319	58	50	500	KLT64320	9-16813
	420	541 x 368 x 416	78	50	500	KLT64420	9-16817

Small parts containers











Hinged on one side and closed with 2 snap-on fixtures on the other side

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
400 x 300	138	341 x 268 x 116	8.90	25	300	KLT43120ASDV	9-22248
	188	341 x 268 x 166	13.50	25	300	KLT43170ASDV	9-22249
	238	341 x 268 x 216	17.80	50	300	KLT43220ASDV	9-22250
	288	341 x 268 x 266	22.20	50	300	KLT43270ASDV	9-22251
600 x 400	138	541 x 368 x 116	19.60	30	500	KLT64120ASDV	9-22243
	188	541 x 368 x 166	29.30	30	500	KLT64170ASDV	9-22244
	238	541 x 368 x 216	39.00	40	500	KLT64220ASDV	9-22245
	288	541 x 368 x 266	48.80	50	500	KLT64270ASDV	9-22242
	338	541 x 368 x 316	58.50	50	500	KLT64320ASDV	9-22246
	438	541 x 368 x 416	78.00	50	500	KLT64420ASDV	9-22247

With hinged two-part lid


External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
400 x 300	138	341 x 268 x 116	8.9	25*	300	KLTD43120	9-18467
	188	341 x 268 x 166	13	25*	300	KLTD43170	9-18473
	238	341 x 268 x 216	17	50	300	KLTD43220	9-16796
	288	341 x 268 x 266	22	50	300	KLTD43270	9-16803
600 x 400	138	541 x 368 x 116	19	30	500	KLTD64120	9-18098
	188	541 x 368 x 166	29	30	500	KLTD64170	9-16807
	238	541 x 368 x 216	39	40	500	KLTD64220	9-16275
	288	541 x 368 x 266	48	50	500	KLTD64270	9-16811
	338	541 x 368 x 316	58	50	500	KLTD64320	9-16815
	438	541 x 368 x 416	78	50	500	KLTD64420	9-16819

Small parts containers KLT with ribbed base

Excellent rigidity - ideal for automated storage

- Ribbed base containers can carry 50 kg, sturdy design reduces base deflection to a minimum*
- **Developed for automated small parts storage**
- Perfect for use on conveyors, storage and order picking, transport and manual handling



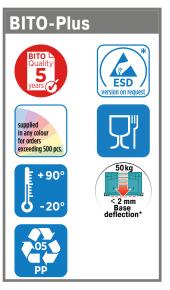



400 x 300 mm



600 x 400 mm

i BITO info

*All values assume an ambient temperature of 23°C, long side-on container handling and uniformly distributed loads.



External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
400 x 300	220	341 x 268 x 200	16	50	300	KLT43220R	9-16795
	270	341 x 268 x 250	20	50	300	KLT43270R	9-16802
600 x 400	120	541 x 368 x 100	16	50	500	KLT64120R	9-18097
	170	541 x 368 x 150	26	50	500	KLT64170R	9-16806
	220	541 x 368 x 200	36	50	500	KLT64220R	9-16274
	270	541 x 368 x 250	45	50	500	KLT64270R	9-16810
	320	541 x 368 x 300	55	50	500	KLT64320R	9-16814
	420	541 x 368 x 400	74	50	500	KLT64420R	9-16818

With hinged two-part lid

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
400 x 300	238	341 x 268 x 200	16	50	300	KLTD43220R	9-16800
	288	341 x 268 x 250	20	50	300	KLTD43270R	9-16804
600 x 400	138	541 x 368 x 100	16	50	500	KLTD64120R	9-18099
	188	541 x 368 x 150	26	50	500	KLTD64170R	9-16808
	238	541 x 368 x 200	36	50	500	KLTD64220R	9-16276
	288	541 x 368 x 250	45	50	500	KLTD64270R	9-16812
	338	541 x 368 x 300	55	50	500	KLTD64320R	9-16816
	438	541 x 368 x 400	74	50	500	KLTD64420R	9-16820

Small parts containers



Small parts containers KLT with double base


Developed to meet the high demands of automated small parts storage

■ Double base containers can carry up to 75 kg, sturdy design reduces base deflection to a minimum*

Perfect for use on conveyors, storage and order picking, transport and manual handling

■ Colour: turquoise







400 x 300 mm



600 x 400 mm

i BITO info

*All values assume an ambient temperature of 23°C, long side-on container handling and uniformly distributed loads.




External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
400 x 300	220	341 x 268 x 200	16	75	300	KLT43220D	9-17504
	270	341 x 268 x 250	20	75	300	KLT43270D	9-17506
600 x 400	120	541 x 368 x 100	16	75	500	KLT64120D	9-18100
	170	541 x 368 x 150	26	75	500	KLT64170D	9-17508
	220	541 x 368 x 200	36	75	500	KLT64220D	9-17517
	270	541 x 368 x 250	45	75	500	KLT64270D	9-17510
	320	541 x 368 x 300	55	75	500	KLT64320D	9-17512
	420	541 x 368 x 400	74	75	500	KLT64420D	9-17514

With hinged two-part lid


External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
400 x 300	238	341 x 268 x 200	16	75	300	KLTD43220D	9-17505
	288	341 x 268 x 250	20	75	300	KLTD43270D	9-17507
600 x 400	138	541 x 368 x 100	16	75	500	KLTD64120D	9-18101
	188	541 x 368 x 150	26	75	500	KLTD64170D	9-17509
	238	541 x 368 x 200	36	75	500	KLTD64220D	9-17518
	288	541 x 368 x 250	45	75	500	KLTD64270D	9-17511
	338	541 x 368 x 300	55	75	500	KLTD64320D	9-17513
	438	541 x 368 x 400	74	75	500	KLTD64420D	9-17515

Small parts containers KLT

Accessories










B Security seals



C Locking systems BS



O Covers for pal-letised loads



Label sheets



Labels



G Label covers



Document pockets



Slot-in divider strips



Transport dolly



Bag holder rails



Multi-trip transport solution for bins and containers

Pos.	Description	cription		Accepts bin type	Product type	Pcs/ pack	Ref. no.
A	Drop-on lids	will cover container stacks, can also be used to close individ-	turquoise	400 x 300 mm	AD43	1	43-20499
		ual containers, suited for automated lidding and strap-sealing		600 x 400 mm	AD64	1	43-20497
B	Security seals	tear-off security seals, suited for all XL and KLT containers except for containers sized 800 x 600 mm, colour: red	red		KLTP	500	9-16271
C	Locking systems BS	extra charge per container	for small parts contain- ers KLT		BS1	1	7-14434
D	Covers for palletised loads	cover palletised bins and containers	black		PAH12.80	1	9-18421
(3	Label sheets	pre-perforated blank label sheets, ready for direct printing, suited for laser and inkjet printers, on white DIN A4 sheets, 140 g/m², 25 sheets per pack, colour white	white		46-20778	100	46-20778
B	Labels	white plastic cards, suited for all XL and KLT containers			XL21/60	50	43-14558
		with a minimum height of 170 mm			XL21/74	50	43-14557
G	Label covers	label holder (PVC) with bent lip allows easy label insertion from the top, suited for all XL and KLT containers	water clear without retain- ing fixture to prevent loss of label	KLT	KLT-ET1	10	9-20053
		label holder (PVC) with bent lip allows easy label insertion from the top, suited for all KLT containers with a minimum height of 170 mm and for XL containers sized 600 x 400 mm and a minimum height of 220 mm	water clear with retaining fixture to prevent loss of label	KLT	KLT-ET2	10	9-20054
(1)	Document pockets	ideal for frequent exchange of inserts, adhesive fabric backing provides strong adhesion, colour transparent	transparent		MBET	10	6-5031
A	Slot-in divider strips	made from black recycled polypropylene, flexi dividers are	Material thickness 10 mm		SSU120/11	10	43-18420
		supplied in standard lengths, can be cut to required length	Material thickness 5 mm		SSU180/5	10	7-15509
		with a saw for wood or metals (additional charge for ready cut lengths)			SSU50/5	10	43-18417
		cut lengths)	Material thickness 10 mm		SSU55/11	10	43-18419
			Material thickness 5 mm		SSU80/5	10	43-18418
Ð	Transport dolly	complete with 4 swivel castors, designed for Euro-	RAL 5007 Brilliant blue		TR64	1	43-1491
		pean size stacking containers: 1 x 600 x 400 mm or 2 x 400 x 300 mm, framework from glassfibre reinforced polyamide			TR64G	1	43-21883
K	Bag holder rails	clip-on fitting to MB, XL and KLT containers, holds bags open for easy filling, can be retro-fitted, demountable, colour: grey (picture shows customised color)	grey		MB-BR64D	1	6-31553
0	Multi-trip transport solution for bins and containers	can be moved without hand pallet truck or forklift truck, standard dimensions of 800 x 600 mm (1/2 Euro pallet)					

Small parts containers



Insert bins

type EK

Make maximum use of space and stock several references in the same bin!

- For easy subdivision and full use of space
- Optimised grip solution for easy positioning and removal
- Further subdivision, stackable







Scan this QR code:

Insertable bins

www.bito.com/web-kltek-de

Type EK, for small parts containers KLT

To suit containers sized L x W	Format	External dimensions L x W x H	Volume	Bin type	Colour	Pcs/pack	Ref. no.
mm		mm	litres				
400 x 300	1/4	165 x 129 x 90	1.6	EK16129KLT	black	32	9-20000
	1/2 crosswise	258 x 166 x 90	3.2	EK25169KLT	black	16	9-20004
600 x 400	1/8	178 x 129 x 90	1.7	EK17129KLT	black	32	9-19997
	1/4	263 x 178 x 90	3.5	EK26179KLT	black	16	9-20002
	1/2 crosswise	358 x 268 x 90	7.2	EK35269KLT	black	8	9-20006
	1/2 lengthwise	530 x 178 x 90	7.3	EK53179KLT	black	8	9-19996

Description		Accepts bin type	Product type	Pcs/pack	Ref. no.
Cross dividers	allow further subdivision of	EK16129KLT, EK25169KLT	QT169	10	9-16753
	insertable bins	EK17129KLT, EK17129XL, EK17139XL, EK25179XL, EK26179KLT, EK27179XL, EK53179KLT, EK55179XL	QT179	10	9-16502
		EK35269KLT	QT269	10	9-16754
Dust covers	reliable protection against	EK16129KLT	SD1612	10	9-16872
	soiling, containers remain fully	EK17129KLT, EK17129XL	SD1712	10	9-16870
	stackable	EK25169KLT	SD2516	10	9-16879
		EK26179KLT	SD2617	10	9-16877
		EK35269KLT	SD3526	10	9-16875
		EK53179KLT	SD5317	10	9-16873

Insert bins


type EEK

Make maximum use of space and stock several references in the same bin!

- For easy subdivision and full use of space
- With inward pointing integral ledges for convenient handling

Type EEK, for small parts containers KLT

		To suit contain- ers sized L x W	Format	External dimensions L x W x H	Volume	Bin type	Colour	Pcs/pack	Ref. no.
		mm		mm	litres				
1/2 lengthwise	600 x 400	1/8	178 x 129 x 85	1.6	EEK17128KLT	black	32	9-31321	
EEK53178KLT EEK53123KLT			1/6	178 x 178 x 230	5.7	EEK17123KLT	black	6	9-30279
			1/4	265 x 179 x 85	3.4	EEK26178KLT	black	16	9-22539
1/4 EEK26178KLT	1/6 EEK17123KLT		1/4	265 x 179 x 230	9.6	EEK26123KLT	black	4	9-31366
		1/2 lengthwise	530 x 179 x 230	18.0	EEK53123KLT	black	1	9-30280	
			1/2 lengthwise	530 x 179 x 85	7.0	EEK53178KLT	black	8	9-22538
			1/2 crosswise	358 x 263 x 85	7.0	EEK35268KLT	black	8	9-31323
			1/2 crosswise	358 x 263 x 230	18.0	EEK35223KLT	black	2	9-51032



Robust and rigid - great for

- Zinc-plated steel
- Collars increase the standard tray height from 38 mm to up to 400 mm
- Very low base deflection
- With pressure-joined corners







Collar to increase tray height, push-in fitting




Tray subdivision with insert bins EK



Steel trays are used for heavy weight items (50 to 300 kg). With a very low base deflection, these steel trays ensure safe handling in automated storage facilities. By clipping on a collar or adding insert bins, it is possible to perfectly adapt the trays to your stock items.

Plastic trays

- Allow automated handling of cartons, even if they are damaged
- Can be handled with all types of service vehicles
- Further variations upon request

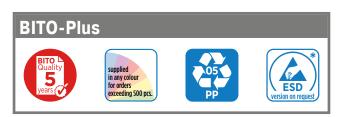





Distribution trays DT 640

- Smooth base and ribbed edges at container base ensure trouble free travel on conveyors
- Inner ribbing ensures very good stability
- Dimensions suited for 600 x 400 mm bins and cartons

External dimensions L x W	Height	Internal dimensions L x W x H	Colour	Ref. no.
mm	mm	mm		
640 x 426	50	608 x 408 x 29	blue	45-20017



Distribution trays DT 670

- Smooth base and ribbed edges at container base ensure trouble free travel on conveyors
- Inner ribbing ensures very good stability

External dimensions L x W	Height	Internal dimensions L x W x H	Colour	Ref. no.
mm	mm	mm		
670 x 410	70	629 x 379 x 50	blue	45-22696



European size trays

- European size trays provide ample space for your products
- Ribbed edges at container base for smooth operation on conveyors

External dimensions L x W			Colour	Ref. no.
mm	mm	mm		
399 x 299	50	379 x 279 x 30	blue	45-21867
599 x 399	50	579 x 379 x 30	blue	45-21866



Trays XLT

- Dimensions compatible with stacking container series BN, XL and KLT
- Ribbed edges at container base for smooth operation on conveyors

External dimensions L x W	Height	Internal dimensions L x W x H	Colour	Ref. no.
mm	mm	mm		
600 x 400	50	568 x 368 x 30	blue	45-22542

i BITO info

Load holders for XLT64 storage trays

These optional load holders fix bins and containers lengthwise or crossways on a tray. Even a single smaller size container is securely held in place - shifting is excluded. Spring-mounted load holders even allow to fix several different size bins on the same tray.



Trays XLT-P

- Dimensions compatible with stacking container series BN, XL and KLT
- Ribbed edges at container base for smooth operation on conveyors

External dimensions L x W	Height	Internal dimensions L x W x H	Colour	Ref. no.
mm	mm	mm		
600 x 400	55	568 x 368 x 30	blue	45-30286



Load retention corners for XLT64-P

Optionally available: push-fit corners prevent cartons or bins from slipping sideways.





Multi-purpose containers MB

Your first choice for stacking and nesting: BITOBOX MB

The BITO MB container series in Euro footprint is the option of choice for distribution chains. Compared to one-way packaging such as cardboard boxes, MB containers are extremely robust, long lasting and save up to 75% on volume when nested. Suited for storage, order picking and transport alike, all containers of the MB series can be used as outer packaging. This means that your products do not need repacking allowing you to save on packaging waste, help the environment and conserve resources.









Product features



Indented buffer zones

Trouble-free handling on conveyors, as indented buffers prevent same height containers from overriding in the case of jams.



i www.mybitobox.com
Configure colours and logos online!

Label areas

Label areas with both a smooth and a dimpled surface offer enough room for placing adhesive labels. As these areas are slightly recessed, the labels are reliably protected during nesting and de-nesting.



Ideal travel characteristics

Designed with textured base and rounded edges for optimum use on conveyors and in live storage installations.



Safe stacking

"Swing" stacking rails maximise volume utilisation and ensure safe stacking. The rails lock into upright position to prevent swinging down by accident.



Nesting

Simply turn the stacking rails into their side position for container nesting.



Maximum use of volume

Smooth internal sides provide 100% volume utilisation and make sure that bins can be nested and de-nested without jamming.



Easy cleaning

Smooth surfaces and drainage holes in the container rim allow fast, easy and thorough cleaning.



Manual handling

Generously spaced and ergonomically designed hand grips, comfortable to use when container is loaded.



Hinged lid

The hinged, interlocking two-piece lid has an integral recessed area to provide outstanding stacking stability. This standard lid comes firmly fitted to the container and can be sealed in various ways.



Company logos

Company logos and messages can be applied by injection moulding, screen printing, pad printing or hot foil stamping – please ask!




Strap-sealable hinged lid

The hinged lid has been developed for automated long and short side strap-sealing. Raised stacking edges guarantee maximum stacking stability.



The range that stacks safely and nests away during empty storage

- MB 3 containers in 1
- 1. Transport container
- 2. Storage container
- 3. Order picking box
- Nesting saves up to 75% on volume
- Designed for a long service life
- Reduce packaging waste
- Colour: dove blue



NESTING AND FOLDING CONTAINERS





600 x 400 mm

800 x 600 mm



810 x 400 mm

Standard version

External dimensions L x W	Height	Volume	Load capacity	Bin type	Ref. no.
mm	mm	litres	kg		
300 x 200	153	5	15	MB32151	6-5015
400 x 300	173	16	14	MB43171	6-15864
	223	18	20	MB43221	6-11091
	273	22	25	MB43271	6-11092
	323	27	25	MB43321	6-11093
600 x 400	173	29	25	MB64171	6-11090
	223	38	30	MB64221	6-11089
	273	47	30	MB64271	6-11088
	323	58	35	MB64321	6-10802
	373	67	28	MBEC64371	79-51059
	423	74	35	MB64421	6-11087
800 x 400	323	76	35	MB84321	6-5045
	423	100	35	MB84421	6-5046
800 x 600	323	120	50	MB86321	6-15246
	423	158	50	MB86421	6-15255

300 x 200 mm

400 x 300 mm





With hinged two-part lid

External dimen- sions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
310 x 200	170	5	15	100	MBD32151	6-5017
410 x 300	190	16	14	150	MBD43171	6-16043
	240	18	20	150	MBD43221	6-11123
	290	22	25	150	MBD43271	6-11124
	340	27	25	150	MBD43321	6-11125
610 x 400	190	29	25	200	MBD64171	6-16766
	240	38	30	200	MBD64221	6-11119
	290	47	30	200	MBD64271	6-11120
	340	58	35	200	MBD64321	6-11121
	390	67	28	160	MBDEC64371	79-51075
	440	74	35	200	MBD64421	6-11122
800 x 600	353	115	50	300	MBD86321	6-15249
	453	154	50	300	MBD86421	6-15258
810 x 400	340	76	35	200	MBD84321	6-5053
	440	100	35	200	MBD84421	6-5054



All container sizes interstack even when strap-sealed!



With hinged interlocking lid suited for strap-sealing

External dimen- sions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
410 x 300	199	13	14	150	MBDU43171	6-30314
	249	17	20	150	MBDU43221	6-30315
	299	21	25	150	MBDU43271	6-30316
	349	25	25	150	MBDU43321	6-30317
610 x 400	199	29	25	200	MBDU64171	6-16861
	249	38	30	200	MBDU64221	6-16131
	299	47	30	200	MBDU64271	6-16133
	349	58	35	200	MBDU64321	6-16132
	449	74	35	200	MBDU64421	6-16134
810 x 400	349	77	35	200	MBDU84321	6-22647
	449	102	35	200	MBDU84421	6-22648



With mounted stacking rails

External dimen- sions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
400 x 300	173	16	14	150	MBB43171	6-16011
	223	18	20	150	MBB43221	6-11126
	273	22	25	150	MBB43271	6-11117
	323	27	25	150	MBB43321	6-11118
600 x 400	173	29	25	200	MBB64171	6-11112
	223	38	30	200	MBB64221	6-11113
	273	47	30	200	MBB64271	6-11114
	323	58	35	200	MBB64321	6-11115
	373	67	28	160	MBBEC64371	79-51074
	423	74	35	200	MBB64421	6-11116
800 x 400	323	76	35	200	MBB84321	6-5049
	423	100	35	200	MBB84421	6-5050



With hinged stacking seats

External dimen- sions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
800 x 600	353	115	50	200	MBB86321	6-15252
	453	154	50	200	MBB86421	6-15261





With polyamide swivel castors

External dimensions L x W	Height	Volume	Load capacity	Bin type	Ref. no.
mm	mm	litres	kg		
800 x 600	423	114	50	MB86321DROLL-K	6-19483
	523	151	50	MB86421DROLL-K	6-19485



With plastic swivel castors

External dimensions L x W	Height	Volume	Load capacity	Bin type	Ref. no.
mm	mm	litres	kg		
800 x 600	423	114	50	MB86321DROLL-G	6-19484
	523	151	50	MB86421DROLL-G	6-19486



With locking system

External dimensions L x W	Height	Base option	Load capac- ity	Stacking load	Volume	Lock type	Bin type	Ref. no.
mm	mm		kg	kg	litres			
410 x 300	240	Standard base	20	300	18	Lever lock BS2	MBD43221BS2	6-18127
610 x 400	340	Standard base	35	300	58	Cam lock BS1	MBD64321BS1	6-18125
	340	Standard base	35	300	58	Lever lock BS2	MBD64321BS2	6-18128
800 x 600	353	Standard base	50	300	120	Cam lock BS1	MBD86321 BS1	6-20286
	353	Ribbed base	50	300	109	Cam lock BS1	MBD86321R BS1	6-20287
	353	Double base	200	300	109	Cam lock BS1	MBD86321D BS1	6-20288
	453	Standard base	50	300	158	Cam lock BS1	MBD86421 BS1	6-20291
	453	Ribbed base	50	300	147	Cam lock BS1	MBD86421R BS1	6-20292
	453	Double base	200	300	147	Cam lock BS1	MBD86421D BS1	6-20293

Multi-purpose containers MB with ribbed base

Ideal for handling heavy weight loads - also in automated facilities

- High load capacities of up to 50 kg / 75 kg
- Containers are also available with hinged interlocking lid or with stacking rails

Very low base deflection for use in automated bin storage facilities*





NESTING AND FOLDING CONTAINERS

BITO-Plus



















*All values assume an ambient temperature of 23°C, long side-on container handling and uniformly distributed loads.









600 x 400 mm

800 x 600 mm

External dimensions L x W	Height	Volume	Load capacity	Bin type	Ref. no.
mm	mm	litres	kg		
600 x 400	241	38	50	MB64221R	6-17601
	341	58	50	MB64321R	6-17558
	441	74	50	MB64421R	6-17603
800 x 600	323	114	75	MB86321R	6-15247
	423	151	75	MB86421R	6-15256

With hinged stacking seats

External dimen- sions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
800 x 600	353	109	75	200	MBB86321R	6-15253
	453	147	75	200	MBB86421R	6-15262



With hinged two-part lid

External dimen- sions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
800 x 600	353	109	75	300	MBD86321R	6-15250
	453	147	75	300	MBD86421R	6-15259



i www.mybitobox.com


Configure colours and logos online!

Multi-purpose containers MB with double base

Ideal for handling heavy weight loads - also in automated facilities

■ Double base containers offer increased stability, silent travelling on conveyors, and are easier to clean than ribbed base containers

- High load capacities of up to 75 kg / 200 kg
- Very low base deflection for use in automated bin storage facilities*
- Containers are also available with hinged interlocking lid or with stacking rails

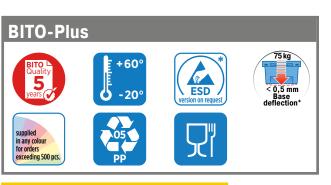



*All values assume an ambient temperature of 23°C, long side-on container handling and uniformly distributed loads.





600 x 400 mm 800 x 600 mm



External dimensions L x W	Height	Volume	Load capacity	Bin type	Ref. no.
mm	mm	litres	kg		
600 x 400	242	38	75	MB64221D	6-17605
	342	58	75	MB64321D	6-17559
	442	74	75	MB64421D	6-17607
800 x 600	323	114	200	MB86321D	6-15248
	423	151	200	MB86421D	6-15257

With hinged stacking seats

External dimen- sions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
800 x 600	353	109	200	200	MBB86321D	6-15254
	453	147	200	200	MBB86421D	6-15263

rod two port lid

With hinged two-part lid

External dimen- sions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
800 x 600	353	109	200	300	MBD86321D	6-15251
	453	147	200	300	MBD86421D	6-15260

Multi-purpose containers MB Food & Delivery

- Helps last mile logistics to provide best grocery home delivery services
- "cool" solution consisting of bins, modular insertable cool boxes, cool packs and dividers

- Ideally adapted to the dimensions of food packaging
- With notches at the top edge of the long sides for hanging bags
- Suitably sized cool packs for chilled products and frozen foods can also be



Equipment options

with notches at the top edge of the long sides for hanging bags



perforated sides with/without stacking rails



solid sides with/without stacking rails



solid/perforated sides with/without stacking rails



solid/perforated sides with hinged two-part lid

without notches at the top edge of the long sides for hanging bags





Multi-purpose containers MB Food & Delivery, with perforated sides

External dimensions L x W	Features	Stacking rails / lid	Height	Volume	Load capacity	Stacking load	Colour	Bin type	Ref. no.
mm			mm	litres	kg	kg			
600 x 400	with notches for bags		373	67	25	140	lime green	MBEC64372-B3	79-51065
	with notches for bags	with rails	373	67	25	140	lime green	MBBEC64372-B3	79-51071
	without notches for bags		373	67	25	140	lime green	MBEC64372	79-51060
	without notches for bags	with rails	373	67	25	140	lime green	MBBEC64372	79-51072



Multi-purpose containers MB Food & Delivery, with solid sides

External dimensions L x W	Features	Stacking rails / lid	Height	Volume	Load capacity	Stacking load	Colour	Bin type	Ref. no.
mm			mm	litres	kg	kg			
600 x 400	with notches for bags		373	67	28	160	lime green	MBEC64371-B3	79-51062
	with notches for bags	with rails	373	67	28	160	lime green	MBBEC64371-B3	79-51073
	without notches for bags		373	67	28	160	dove blue	MBEC64371	79-51059
	without notches for bags	with rails	373	67	28	160	dove blue	MBBEC64371	79-51074
610 x 400	without notches for bags	with lid	390	67	28	160	dove blue	MBDEC64371	79-51075



Insertable cool boxes for chilled and frozen products

Format	External dimensions L x W x H	Material	Volume	Bin type	Ref. no.
	mm		litres		
size 2 / full volume	528 x 358 x 352	EPP	35	MBIE-U6437-2	79-51057
size 3 / ½ volume	358 x 263 x 352	EPP	15	MBIE-U6437-3	79-51058
perforated dividers	298 x 25 x 294	EPP		MBIE-QT64371-23	79-51050

Cool packs for chilled and frozen products

Description	External dimensions L x W x H	Weight	Suited for	Colour	Bin type	Ref. no.
	mm	kg				
suited for 0°C	296 x 25 x 294	1800	chilled products	white	MBIE-A6437F-23	79-51053
	292 x 25 x 117	700	chilled products	white	MBIE-A6437F	79-51055
suited for -21°C	296 x 25 x 294	1800	frozen products	blue	MBIE-A6437TK-23	79-51054
	292 x 25 x 117	700	frozen products	blue	MBIE-A6437TK	79-51056

Accessories









B Barcoded security seals

Drop-on lid

Transport dolly





Multi-purpose containers MB - insulation accessories

Thermo inlays

Innvoative packaging solution for temperature sensitive goods

- Foldable insulation set, available in 2 sizes
- Protect your goods against strong temperature fluctuations
- Cool packs keep the inside temperature at an even level
- Container inlays are also nestable
- Delivery includes cool packs







Thermo-inlays, for multi-purpose containers MB

Description	Accepts bin type	Number of cool packs	Ref. no.
Thermo-inlays	MBD43271	2	6-22689
	MBD64271	4	6-22688

Multi-purpose containers MB - Mail custom solution

with hinged two-part lid

Officially approved for use by German post offices and postal services

- These MB containers have been especially developed for mail sorting centres and have been approved by the Deutsche Post AG (German Mail) for use on conveyors.
- Nesting saves up to 75% on volume
- Single use security seals safely lock containers with hinged lid and protect integrity of contents
- Ergonomically designed grips, comfortable to use when container is loaded
- The textured base and rounded edges ensure optimum travel characteristics on conveyors and in live storage systems











310 x 200 mm

410 x 300 mm

610 x 400 mm

With hinged two-part lid

External dimensions L x W	Height	Volume	Load capacity	Bin type	Ref. no.
mm	mm	litres	kg		
310 x 200	170	5	15	MBD32151POST	6-17269
410 x 300	240	18	20	MBD43221POST	6-17264
	290	22	25	MBD43271POST	6-17265
610 x 400	290	47	30	MBD64271POST	6-17267
	340	58	35	MBD64321POST	6-17268




Multi-purpose containers MB - insulation accessories

Thermo insulation sets

Safe and reliable shipping of temperature-sensitive products


- Ideal for shipping temperature-sensitive products: pharmaceuticals, vaccines etc.
- Designed to minimise transport damage or product spoilage
- Kit includes 1 Neopor® box with lid suitable for multi-purpose containers MBD43271 and MBD64271, 1 washable inlay from PS and 3 cool packs per inlay
- Keep a temperature range of 2-8 °C for at least 12 hours



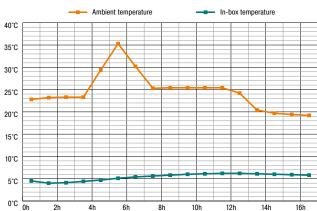

Summer temperature profile inside thermo insulation set



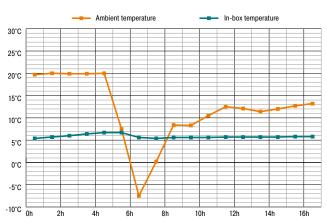

Winter temperature profile inside thermo insulation set

PITO info

At a constant outside temperature of 20°C, two cool packs are sufficient to maintain a temperature between 2°C and 8°C inside a container. This temperature is maintained for more than 12 hours in multi-purpose containers MBD43271 and for more than 8 hours in multi-purpose containers MBD64271.

Temperature curves shown here are for illustration purposes only. More information on www.bito.com/downloads.

Thermo insulation sets, for multi-purpose containers MB

Description	Accepts bin type	Dimensions W x H x D	Useable volume	Ref. no.
		mm	litres	
Thermo insulation sets	MBD43271	170 x 170 x 170	5	6-31363
	MBD64271	360 x 260 x 160	17	6-31364

os.	s. Description		Dimensions	Product type	Pcs/pack	Ref. no.
			mm			
A	Replacement	from Neopor®, ergonomically optimised hand cups	L 340 x W 259 x H 50	Typ 4327	1	6-31440
	cover		L 528 x W 358 x H 60	Typ 6427	1	6-31441
В	Inlays	washable inlay made from polystyrene (PS)	-	Typ 4327	1	6-31359
			-	Тур 6427	1	6-31360
C	Cool packs	2 mm insulating coating prevents cold packs from freezing to each	L 195 x W 130 x H 23	Typ 4327	1	6-31361
	other or to contents, dimensions refer to unfrozen cold packs, maximum dimensional stability during freezing		L 280 x W 190 x H 30	Тур 6427	1	6-31362




Multi-purpose containers MB

transparent version

Perfect product visibility

- Container from transparent polypropylene
- Perfect for transport, order picking and storage

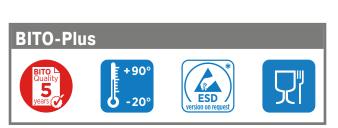



External dimensions L x W	Height	Volume	Load capacity	Bin type	Ref. no.
mm	mm	litres	kg		
400 x 300	223	18	20	MB43221TRANSP	6-18956
600 x 400	223	38	30	MB64221TRANSP	6-18957
	323	58	35	MB64321TRANSP	6-18958

Transparent version, with stacking rails

External dimensions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
400 x 300	223	18	20	150	MBB43221TRANSP	6-18964
600 x 400	223	38	30	200	MBB64221TRANSP	6-18965
	323	58	35	200	MBB64321TRANSP	6-18966

Transparent version, with hinged two-part lid

External dimensions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
410 x 300	240	18	20	150	MBD43221TRANSP	6-18961
610 x 400	240	38	30	200	MBD64221TRANSP	6-18962
	340	58	35	200	MBD64321TRANSP	6-18963

Multi-purpose containers MB

for hazardous substances, drop-on lid with metal snap locks

Safe transport of hazardous goods such as paints, sprays, etc.

- MB containers for hazardous substances come with drop-on lids complete with ready-mounted metal lever locks
- MB containers have been approved by the Bundesanstalt für Materialforschung und -prüfung (German Federal Institute for Materials Research and Testing) as outer packaging for hazardous goods categorised into packaging groups II and III.
- All containers bear the approval number 4H2/Y25/S/20/D/BAM6107-BITO
- Colour: purple red



External dimensions L x W	Height	Volume	Load capacity	Bin type	Ref. no.
mm	mm	litres	kg		
410 x 310	238	18	13	MBSG43221CLIP	6-18653
	338	27	13	MBSG43321CLIP	6-18655
610 x 410	238	38	17	MBSG64221CLIP	6-18657
	338	58	20	MBSG64321CLIP	6-18659
	438	74	20	MBSG64421CLIP	6-18660



Multi-purpose containers MB

with view and pick opening

Ideal for garments...

- Easy order picking also when bins are stacked
- Instant identification of content
- Containers are also available with hinged interlocking lid or with stacking rails







With long side pick opening

External dimensions L x W	Height	Pick opening W x H	Volume	Load capacity	Bin type	Ref. no.
mm	mm	mm	litres	kg		
600 x 400	223	117 x 439	38	30	MB64226	6-11083
	273	139 x 439	47	30	MB64276	6-11082
	323	158 x 439	58	35	MB64326	6-10804
	423	217 x 439	74	35	MB64426	6-11081

With short side pick opening

External dimensions L x W	Height	Pick opening W x H	Volume	Load capacity	Bin type	Ref. no.
mm	mm	mm	litres	kg		
400 x 300	273	182 x 138	22	25	MB43274	6-5024
	323	182 x 157	27	25	MB43324	6-5025
600 x 400	223	270 x 117	38	30	MB64224	6-11086
	273	270 x 139	47	30	MB64274	6-11085
	323	270 x 158	58	35	MB64324	6-10803
	423	270 x 217	74	35	MB64424	6-11084
800 x 400	323	270 x 158	76	35	MB84324	6-5047
	423	270 x 217	100	35	MB84424	6-5048



Multi-purpose containers MB Eco

recycled material


Your first choice for stacking and nesting: BITOBOX MB

- Stack safely and save space when nested
- Hinged lids can be supplied in five colour options











External dimensions L x W	Height	Volume	Load capacity	Bin type	Ref. no.
mm	mm	litres	kg		
400 x 300	223	18	18	MB43221Eco	C0401-0088
600 x 400	223	38	27	MB64221Eco	C0401-0201
	323	58	31	MB64321Eco	C0401-0087



Multi-purpose containers MB Eco, with mounted stacking rails

External dimen- sions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
400 x 300	223	27	25	135	MBB43221Eco	C0402-0418
600 x 400	223	38	30	180	MBB64221Eco	C0402-0419
	323	58	35	180	MBB64321Eco	C0402-0420



Multi-purpose containers MB Eco, with hinged two-part lid

External dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Lid colour	Ref. no.
mm	litres	kg	kg			
410 x 300 x 240	18	18	135	MBD43221Eco		C0402-0425
						C0402-0428
						C0402-0426
						C0402-0427
						C0402-0429
610 x 400 x 240	38	27	180	MBD64221Eco		C0402-0430
						C0402-0433
						C0402-0431
						C0402-0432
						C0402-0434
610 x 400 x 340	58	31		MBD64321Eco		C0402-0435
						C0402-0438
						C0402-0436
						C0402-0437
						C0402-0439

Multi-purpose containers MB Eco

Accessories







B Security seals



Security seals



Barcoded security seals



Locking clips



Easy peel label holders




G Document pockets



Document pockets



Drop-on lid



Transport dolly



Transport dolly



Multi-purpose containers
MB "Mobile Office"



M Rails for A4 hanging files




N Connector clips



Bag holder rails



P Multi-trip transport solution for bins and containers

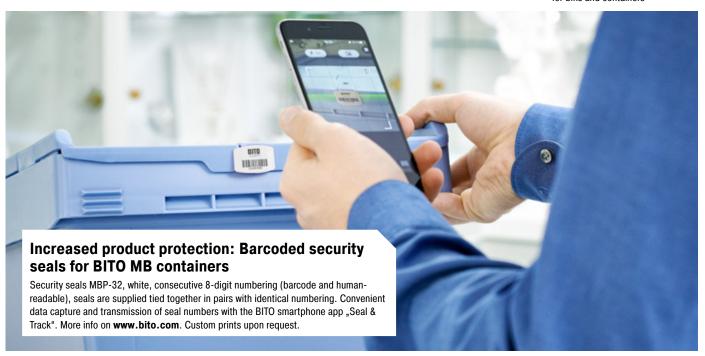



Pos.	Description		Dimensions	Product type	Pcs/ pack	Ref. no.
			mm			
A	Security seals, MBP1 - suited for BITOBOX MB	single use security seals, suited for all MB and XL containers sized 800 x 600 mm at the base, tamper evident seals to inhibit theft, 2 security tags required per container, colour: red, other colours upon request	-	MBP1	500	6-10810
B	Security seals, MBP2 - suited for BITOBOX MB	single use security seals, suited for all MB and XL containers sized 800 x 600 mm at the base, tamper evident seals to inhibit theft, 2 security tags required per container, colour: red, messages and customised colours upon request	-	MBP2	500	6-15705
G	Security seals, MBP2-L - suited for BITOBOX MB, XL, SL	single use security seals with continuous numbering, suited for all MB, SL and XL containers sized 800 x 600 mm, colour: red	-	MBP2-L	500	6-19162
D	Barcoded security seals, MBP3 - suited for BITOBOX MBs in all sizes and XLs 800 x 600 mm	single use security seals with consecutive 8-digit numbering (barcode and human-readable), seals are supplied tied together in pairs with identical numbering, the BITO Smartphone app "Seal + Track" makes reading and transmitting seal numbers easy, custom prints upon request	-	MBP32L	250	6-31550
B	Locking clips, suited for BITOBOX MB	to lock MB's with hinged two-part lid, can be re-used, colour: red	-	MBV	10	6-20299
F	Easy peel label holders, KFA6	self-adhesive carrier foil for easy removal of stick-on labels from bin and container surfaces	L 165 x W 114	KFA6	100	6-31309
	Easy peel label holders, KFA5		L 230 x W 170	KFA5	100	6-31310
G	Document pockets, self-adhesive	ideal for frequent exchange of inserts, adhesive fabric backing provides strong adhesion, colour transparent	L 175 x W 105	MBET	10	6-5031
	3 sides open	ideal for frequent exchange of inserts, adhesive fabric backing provides strong adhesion, Material PVC, colour transparent	L 210 x W 75	MBETVDA	10	6-31311
		ideal for frequent exchange of inserts, adhesive fabric backing provides strong adhesion, colour transparent	L 210 x W 150	MBETDINA5	10	6-19528
(1)	Document pockets, self-adhesive 2 sides open	slightly shorter ticket holder front allows to easily insert and remove cards, Material vinyl, colour blue	L 145 x W 100	46-21108	25	46-21108
	Document pockets,	document pocket with two self-adhesive strips, also suited for location	L 155 x W 85	46-21109	25	46-21109
	self-adhesive 1 side open	marking on shelving and racking, durable adherence to all types of storage and transport bins and containers, Material vinyl, colour blue	L 235 x W 170	46-21110	25	46-21110
	Drop-on lid, for multi-	will cover MB container stacks, can also be used to close individual contain-	L 306 x W 206	MBS32	1	6-15868
	purpose containers	ers, suited for automated lidding and strap-sealing, individual covers can be nested to save on space, adds 10 mm to container height on all sides	L 400 x W 300	MBSU43	1	6-30277
	MB	nested to save on space, adds to find to container neight on all sides		MBSU64	1	6-30276
			L 800 x W 400	MBS84	1	6-22544
			L 800 x W 600	MBS86	1	6-22546
•	Transport dolly, for multi-purpose containers sized 600 x 400 mm	complete with 4 swivel castors, for multi-purpose containers sized 600 x 400 mm, fitted with drop-in lid for optimum positioning of MB containers, made from glassfibre reinforced polyamide, drop-in lid from polypropylene	L 620 x W 420	TR64MBS	1	6-15510
K	Transport dolly,	complete with 4 swivel castors, for multi-purpose containers sized	L 720 x W 370	TR84MB	1	6-16494
	for multi-purpose containers sized 800 x 400 mm and 800 x 600 mm	800 x 400 mm and 800 x 600 mm, anodised aluminium frame with PVC corner edging	L 720 x W 540	TR86MB	1	6-19439
0	Multi-purpose containers MB "Mobile Office", including rails for A4 hanging files	safe transport and storage of hanging files, 2 rails for hanging files per container, to be fitted inside, easy assembly	L 610 x W 400 x H 340	6-12938	1	6-12938
M	Rails for A4 hanging files, for multi- purpose containers MB	2 file rails can be fitted inside the container for safe storage and transport of A4 hanging files. Additionally, the container contents can be secured by a hinged lid or a drop-on lid and security seals. File rails can only be fitted to containers MB(D)64321 and MB(D)64421.	-	MBE64	Paar	6-11920
N	Connector clips	The connector clip allows to form a double-height stacking and transport unit by joining multi-purpose containers face to face. Containers to be joined must have the same length and width, but may differ in height.	-	MBC	100	6-15625
0	Bag holder rails, demountable	clip-on fitting to MB, XL and KLT containers, holds bags open for easy filling, can be retro-fitted, demountable, colour: grey (picture shows customised color)	-	MB-BR64D	1	6-31553
P	Multi-trip transport solution for bins and containers	can be moved without hand pallet truck or forklift truck, standard dimensions of 800 x 600 mm (1/2 Euro pallet)	-			

BITO

Multi-purpose containers MB - special applications

Designed for your special applications

Benefit from utmost versatility: MB containers are just as useful in in-house transport and intralogistics in the widest sense as they are for shipping. This also means that MB containers must be able to cater for custom requirements. For this purpose, BITO provides the widest possible spectrum of features to make your MB container perfect for your needs. Automated barcode labelling or milling and drilling holes to comply with fire prevention regulations are just a few examples.

Of course, we also supply containers with company logos and messages, special dimensions, customised inlays and reinforcing features.

BITOBOX MB

Equipments options



MB with foam inlay, reflective foil and specifically designed label holder.



Special size MB for extra long items – designed to your specifications!



MB used for logistics services by TNT, an internationally operating CEP service provider.



MB with specially designed label holder. Label can only be removed when container is open.



MB used as freight box by the German air carrier Lufthansa.



MB with drainage holes used for storage.



Easy peel label holders

■ Self-adhesive carrier foil for easy removal of stick-on labels from bin and container surfaces









Dimensions	Format	Product type	Pcs/pack	Ref. no.
mm				
L 165 x W 114	DIN A6	KFA6	100	6-31309
L 230 x W 170	DIN A5	KFA5	100	6-31310



Folding boxes EQ

The next generation of folding boxes

Compared to folding boxes of other manufacturers, the BITO folding box EQ features a revolutionary, ergonomically designed and easy to handle folding mechanism.



















Product features




Seesaw (un-)locking profile

Sides lock open with a simple push of the thumb or the heel of the hand on the box shoulder. Developed in cooperation with leading ergonomicists.



Fold-up handles

This alternative to open handle grips prevents unauthorized access to the contents and allows full use of the bin volume as well as easy handling.



Hinged interlocking lids (optional)

loss-proof, tamper evident security seals available




Label holder (optional)

The clear-view label holder can be fitted on the short side or on the lid. Please specify.

Folding boxes EQ


The folding box that really improves workplace ergonomics!

- Robust make withstands many distribution cycles
- Empty containers fold flat to save valuable space during storage and transport
- Space saving ratio 1:4
- The ribbed base and double base versions are also suited for automated storage
- Also available with hinged two-part lid suited for security sealing

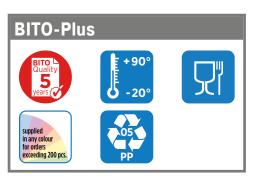




With standard base

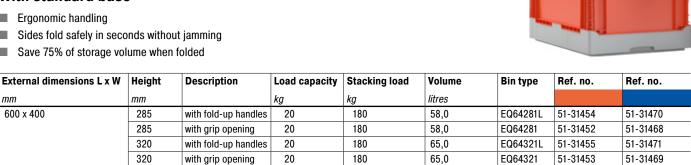





With standard base and hinged two-part lid

with grip opening

External dimensions L x W	Height	Description	Load capacity	Stacking load	Volume	Bin type	Ref. no.	Ref. no.
mm	mm		kg	kg	litres			
600 x 400	297	with fold-up handles	20	180	57,0	EQD64281L	51-31458	51-31474
	297	with grip opening	20	180	57,0	EQD64281	51-31456	51-31472
	332	with fold-up handles	20	180	64,0	EQD64321L	51-31459	51-31475
	332	with grip opening	20	180	64,0	EQD64321	51-31457	51-31473





with ribbed base and with hinged two-part lid

External dimensions L x W	Height	Description	Load capacity	Stacking load	Volume	Bin type	Ref. no.	Ref. no.
mm	mm		kg	kg	litres			
600 x 400	297	with fold-up handles	50	180	54,0	EQD64281LR	51-31466	51-31482
	297	with grip opening	50	180	54,0	EQD64281R	51-31464	51-31480
	332	with fold-up handles	50	180	61,0	EQD64321LR	51-31467	51-31483
	332	with grip opening	50	180	61,0	EQD64321R	51-31465	51-31481




With ribbed base

External dimensions L x W	Height	Description	Load capacity	Stacking load	Volume	Bin type	Ref. no.	Ref. no.
mm	mm		kg	kg	litres			
600 x 400	285	with fold-up handles	50	180	55,0	EQ64281LR	51-31462	51-31478
	285	with grip opening	50	180	55,0	EQ64281R	51-31460	51-31476
	320	with fold-up handles	50	180	62,0	EQ64321LR	51-31463	51-31479
	320	with grip opening	50	180	62.0	EQ64321R	51-31461	51-31477

Accessories



A Security seals



B Drop-on lids



Transport dolly



Document pockets




Multi-trip transport solution for bins and containers

Pos.	Description		Colour	Material	Pcs/pack	Ref. no.
A	Security seals with laser marking	single use security seals fit all EQ folding boxes, seals are supplied tied together in pairs with identical numbering, consecutive laser-applied numbering (barcode)	white	PP	250	51-31666
B	Drop-on lids	thermoformed lid from PS, protection from dust, dust cover can be placed on the folded box, stacking of folded boxes + lid is possible	black	PS	1	51-31437
G	Transport dolly	complete with 4 swivel castors, designed for European size stacking containers: 1 x 600 x 400 mm or 2 x 400 x 300 mm, framework from glassfibre reinforced polyamide	RAL 5007 Brilliant blue		1	43-1491
D	Document pockets	ideal for frequent exchange of inserts, adhesive fabric backing provides strong adhesion, colour transparent	transparent	PE	10	6-5031
B	Multi-trip transport solution for bins and containers	can be moved without hand pallet truck or forklift truck, standard dimensions of 800 x 600 mm (1/2 Euro pallet)				

Folding distribution boxes MFB

Nesting saves up to 82% of storage volume

- **■** Folds safely in seconds
- Advanced design in 5 variations





400 x 300 mm

600 x 400 mm



Vertical sides allow maximum volume utilisation



Optionally available with



hinged two-part lid



Safe stacking



Easy de-stacking



Robust hinges for a long service life



800 x 600 mm

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Folded height	Bin type	Ref. no.
mm	mm	mm	litres	mm		
400 x 300	220	370 x 270 x 215	22	65	MFB43221	7-22656
600 x 400	220	560 x 360 x 210	42	80	MFB64221	7-22657
	280	560 x 360 x 270	54	80	MFB64281	7-22658
	320	560 x 360 x 310	64	80	MFB64321	7-22659
800 x 600	445	740 x 540 x 425	165	125	MFB86441	7-22660



With hinged two-part lid

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Folded height	Bin type	Ref. no.
mm	mm	mm	litres	mm		
400 x 300	220	370 x 270 x 215	22	65	MFBD43221	7-22661
600 x 400	230	560 x 360 x 210	42	90	MFBD64221	7-22662
	290	560 x 360 x 265	54	90	MFBD64281	7-22663
	330	560 x 360 x 310	64	90	MFBD64321	7-22664
800 x 600	465	740 x 540 x 425	165	145	MFBD86441	7-22665



Accessories







B Short side safety lock



C Label frames



Drop-on lids



Transport dolly



Transport dolly

Pos.	Description		Colour	Dimensions	Product type	Pcs/ pack	Ref. no.
				mm			
A	Security seals	tear-off security seals, suited for all MBF folding distribution boxes, application of customer specific logos and custom prints possible, colour: red	red	-	MFBP	100	7-22666
B	Short side safety lock	protection against theft, prevention of short sides being pried open by external pressure	-	-	MFBS	1	7-22675
C	Label frames	ideal for accompanying documents, not suited for MFB(D)64221	dove blue	L 160 x W 80	MFBER80	1	7-22673
D	Drop-on lids	reliable protection against soiling	dove blue	L 400 x W 300	MFB-AD43	1	7-22670
			dove blue	L 600 x W 400	MFB-AD64	1	7-22671
			anthracite grey	L 800 x W 600	MFB-AD86	1	7-22672
(3	Transport dolly	complete with 4 swivel castors, designed for European size stacking containers: 1 x 600 x 400 mm or 2 x 400 x 300 mm, framework from glassfibre reinforced polyamide	RAL 5007 Brilliant blue	L 620 x W 420	TR64	1	43-1491
G		supplied with 2 swivel and 2 fixed castors, suited for containers sized 800 x 600 mm, made from polypropylene	RAL 5007 Brilliant blue	L 800 x W 600	RU86.125	1	43-1150




Stack and nest containers U-Turn

The lightweight space giant

- Stack turn nest
- **Huge storage capacity**
- Nesting saves more 64% on volume
- Extremely lightweight yet very sturdy









Features and benefits



Approx. 20% more storage volume

than with stack and nest containers with sloped sides



Foldable drop-on lid saves transport costs, because folded lids can be placed in empty containers



Base variations for manual and automated warehousing standard single-layer base, ribbed base, double base




Colour selection available in 4 colours as standard

External dimensions L x W	Height	Handle type	Base type	Colour	Bin type	Ref. no.
mm	mm					
600 x 400	320 gri	grip opening	smooth, single-layer base	blue	DSB64321	C0501-0001
				green	DSB64321	C0501-0002
				red	DSB64321	C0501-0003
				grey	DSB64321	C0501-0004
		integrated pocket handles	Ribbed base	grey	DSB64321R	C0501-0005
			Double base	arev	DSB64321D	C0502-0001

Stack and nest containers















B Security seals

Barcoded security seals

Transport dolly

Multi-trip transport solution for bins and containers

Pos.	Description	escription				
A	Drop-on lid	sized 600 x 400 mm, grey	DSBS64-F	1	78-51030	
B	Security seals	prevents unauthorised access to contents tear-off seal, perfectly adapted to the MB container series	MBP1	500	6-10810	
C	Barcoded security seals	single use security seals with consecutive 8-digit numbering (barcode and human-readable) seals are supplied tied together in pairs with identical numbering the BITO Smartphone app "Seal + Track" makes reading and transmitting seal numbers easy custom prints upon request	MBP32L	250	6-31550	
D	Transport dolly	high-quality swivel castors with thread guard, excellent stability, suited for containers sized 600 x 400 mm	TR64	1	43-1491	
		silent operation through rubber tyres, excellent stability, suited for containers sized 600 x 400 mm	TR64G	1	43-21883	
(Multi-trip transport solution for bins and containers	can be moved without hand pallet truck or forklift truck, standard dimensions of 800 x 600 mm (1/2 Euro pallet)	-			

Stack and nest containers DSL

Stackable and nestable container range in many sizes

- Containers are stackable and nestable with a front-toback turn
- Containers sized 600 x 400 mm and 800 x 400 mm have open grips, all other container sizes come with moulded grips pockets
- Easy to clean
- Adapted to Euro pallet size
- Stacking load up to 150 kg
- Choice of 4 colours







With solid sides

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm	mm	mm	litres	kg	kg					
300 x 200	150	215 x 145 x 145	6,0	5	150	DSL3215	7-14354	7-14416	7-14418	7-14417
400 x 280	180	290 x 210 x 176	13,0	10	150	DSL4318	7-14355	7-14419	7-14421	7-14420
590 x 380	135	440 x 290 x 130	18,0	15	150	DSL6413	7-14356			
	202	433 x 285 x 196	34,0	30	150	DSL6420	7-14357	7-14422	7-14424	7-14423
600 x 400	300	452 x 318 x 296	50,0	45	150	DSL6430	7-14358	7-14425	7-14427	7-14426
800 x 400	300	652 x 325 x 296	70,0	55	150	DSL8430	7-14359	7-14428	7-14430	7-14429

Accessories



A Drop-on lid

Pos.	Description		To suit containers sized L x W	Product type	Ref. no.
A	Drop-on lid	reliable protection against soiling, containers remain fully stackable,	590 x 380	DSD6420	7-14351
		colour: grey, from polystyrene	600 x 400	DSD6430	7-14352
			800 x 400	DSD8430	7-14353

Stack and nest containers



Stack and nest containers DST

Stackable and nestable container range in many sizes

- Containers are stackable and nestable with a front-toback turn
- Easy to clean
- Adapted to Euro pallet size
- Drop-on lid to fit (see accessories)





With solid sides

- Suited for heavy duty applications
- Stacking load up to 350 kg
- Nesting saves up to 65% on volume
- Flat base guarantees optimum travel characteristics on conveyors

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
600 x 400	150	512 x 368 x 130	28	35	350	DSTG6415	7-20025
	200	512 x 368 x 180	36	35	350	DSTG6420	7-20026
	250	512 x 368 x 230	46	35	350	DSTG6425	7-20027
	300	512 x 368 x 280	56	50	350	DSTG6430	7-20028
	350	512 x 368 x 330	66	50	350	DSTG6435	7-20029
	400	512 x 368 x 380	76	50	350	DSTG6440	7-20030

Accessories



A Drop-on lid

Pos.	Description		To suit containers sized L x W	Product type	Ref. no.
	Drop-on lid	reliable protection against soiling	<i>mm</i> 600 x 400	DSTD64	7-20037
A	Diop-on ilu	Tenable protection against soming	000 X 400	001004	7-20037

Great for storing, handling and picking large sized goods!


All advantages of the successful MB container series also apply to MB containers with the base dimensions of 800x600 mm: they are very versatile in use, rigid for safe stacking during storage and save on valuable space when nested empty during transport. What makes them stand out compared to other large volume containers is the fact that optional runners can be added and that containers can be nested with fork entry shoes.




Base options



Standard base Standard base for loads up to 50 kg



Ribbed base Ribbed base for loads up to 75 kg



Double baseDouble base for loads up to 200 kg



Water drainage holes
Optionally supplied with drainage holes. Contact us!

Product features



Label coverThe integral label cover protects your address labels and address cards.



Barcode/RFID labelsSlightly recessed label areas allow exact positioning of barcode labels and RFID labels.



Adhesive labels
Dimpled areas allow easy positioning
and removal of adhesive labels.



Manual handlingErgonomically designed, closed hand grips allow easy handling.






Multi-purpose containers MB

with ready-mounted runners

Our large volume containers 800 x 600 mm are nestable even if fork entry shoes are mounted!

- 3 products in 1 storage, order picking and transport
- First container that can be nested with fork entry shoes mounted
- Nest to reduce volume for empty storage and transportation
- Easy to handle, integral grip



www.bito.com







Multi-purpose containers MB with ribbed base, with ready-mounted runners


External dimensions L x W	Height	Volume	Load capacity	Bin type	Ref. no.
mm	mm	litres	kg		
800 x 600	423	114	75	MB86321RKUFE	6-15310
	523	151	75	MB86421RKUFE	6-15316

Multi-purpose containers MB with ribbed base, with hinged stacking seats and fork entry shoes

External dimen- sions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
800 x 600	453	109	75	200	MBB86321RKUFE	6-15314
	553	147	75	200	MBB86421RKUFE	6-15320

Multi-purpose containers MB with ribbed base, with hinged interlocking lid and fork entry shoes

External dimen- sions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
800 x 600	453	109	75	300	MBD86321RKUFE	6-15312
	553	147	75	300	MBD86421RKUFE	6-15318











Multi-purpose containers MB

with ready-mounted runners



Multi-purpose containers MB with double base, with ready-mounted runners

External dimensions L x W	Height	Volume	Load capacity	Bin type	Ref. no.
mm	mm	litres	kg		
800 x 600	423	114	200	MB86321DKUFE	6-15311
	523	151	200	MB86421DKUFE	6-15317



$\label{eq:multi-purpose} \begin{tabular}{ll} Multi-purpose containers MB with double base, with hinged stacking seats and fork entry shoes \end{tabular}$

External dimensions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
800 x 600	453	109	200	200	MBB86321DKUFE	6-15315
	553	147	200	200	MBB86421DKUFE	6-15321



With hinged interlocking lid and fork entry shoes

External dimensions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
800 x 600	453	109	200	300	MBD86321DKUFE	6-15313
	553	147	200	300	MBD86421DKUFE	6-15319



Accessories







B Security seals



Security seals



Locking clips



Easy peel label holders



Document pockets




G Document pockets



Document pockets



Drop-on lid



Add-on fork entry shoes



R Barcoded security seals

Pos.	Description	escription		Product type	Pcs/ pack	Ref. no.
A	Security seals, MBP1 - suited for BITOBOX MB	single use security seals, suited for all MB and XL containers sized 800 x 600 mm at the base, tamper evident seals to inhibit theft, 2 security tags required per container, colour: red, other colours upon request		MBP1	500	6-10810
В	Security seals, MBP2 - suited for BITOBOX MB	single use security seals, suited for all MB and XL containers sized 800 x 600 mm at the base, tamper evident seals to inhibit theft, 2 security tags required per container, colour: red, messages and customised colours upon request	-	MBP2	500	6-15705
G	Security seals, MBP2-L - suited for BITOBOX MB, XL, SL	single use security seals with continuous numbering, suited for all MB, SL and XL containers sized 800 x 600 mm, colour: red	-	MBP2-L	500	6-19162
D	Locking clips, suited for BITOBOX MB	to lock MB's with hinged two-part lid, can be re-used, colour: red	-	MBV	10	6-20299
ß	Easy peel label holders, KFA5	self-adhesive carrier foil for easy removal of stick-on labels from bin and	L 230 x W 170	KFA5	100	6-31310
	Easy peel label holders, KFA6	container surfaces	L 165 x W 114	KFA6	100	6-31309
B	Document pockets,	ideal for frequent exchange of inserts, adhesive fabric backing provides strong	L 175 x W 105	MBET	10	6-5031
	self-adhesive	adhesion, colour transparent	L 210 x W 150	MBETDINA5	10	6-19528
	3 sides open	ideal for frequent exchange of inserts, adhesive fabric backing provides strong adhesion, Material PVC, colour transparent	L 210 x W 75	MBETVDA	10	6-31311
G	Document pockets, self-adhesive 2 sides open	slightly shorter ticket holder front allows to easily insert and remove cards, Material vinyl, colour blue	L 145 x W 100	46-21108	25	46-21108
(i)	Document pockets,	document pocket with two self-adhesive strips, also suited for location marking	L 155 x W 85	46-21109	25	46-21109
	self-adhesive 1 side open	on shelving and racking, durable adherence to all types of storage and transport bins and containers, Material vinyl, colour blue	L 235 x W 170	46-21110	25	46-21110
•	Drop-on lid, for multi-purpose containers MB	will cover MB container stacks, can also be used to close individual containers, suited for automated lidding and strap-sealing, individual covers can be nested to save on space, adds 10 mm to container height on all sides	L 800 x W 600	MBS86	1	6-22546
0	Add-on fork entry shoes, for multi-purpose containers MB	easy to mount and to remove, can be easily retro-fitted by bolt-on fitting to double base containers	L 800 x W 600	6-19330	1	6-19330
K	Barcoded security seals, MBP3 - suited for BITOBOX MBs in all sizes and XLs 800 x 600 mm	single use security seals with consecutive 8-digit numbering (barcode and human-readable), seals are supplied tied together in pairs with identical numbering, the BITO Smartphone app "Seal + Track" makes reading and transmitting seal numbers easy, custom prints upon request	-	MBP32L	250	6-31550



European size stacking containers XL

Hardwearing, yet lightweight and manageable in size!

Heavyweight metal containers that are still being used in many sectors are hard to reconcile with the demands of modern production methods. Time has come for organising processes in line with LEAN PRODUCTION principles. Lightweight, yet robust, BITO XL containers with a base dimension of 800x600 mm and various height options perfectly meet the demands of

decreasing batch sizes.





1 base dimension - 5 height options to suit most needs











420 mm

520 mm



European size stacking containers



European size stacking containers XL with double base

with ready-mounted runners

Safe, clean and strong – a valuable asset to production logistics in any sector

- Containers are the size of half a Euro pallet
- Load capacity 200 kg
- Convenient handling with hand pallet truck or forklift truck
- Large volume
- Large grip with rounded hand rest
- Label holder on all four sides



With ready-mounted runners and closed sides

800 x 600 mm

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
800 x 600	220	762 x 562 x 101	36	200	800	XL86121DKUFE	43-22593
	320	762 x 562 x 201	79	200	800	XL86221DKUFE	43-22605
	420	762 x 562 x 301	121	200	800	XL86321DKUFE	43-20267
	520	762 x 562 x 401	164	200	800	XL86421DKUFE	43-22569
	620	762 x 562 x 501	206	200	800	XL86521DKUFE	43-22585



European size stacking containers

European size stacking containers XL with double base

with ready-mounted runners



With solid sides, hinged two-part lid and runners

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
800 x 600	238	762 x 562 x 101	36	200	800	XLD86121DKUFE	43-22619
	338	762 x 562 x 201	79	200	800	XLD86221DKUFE	43-22617
	438	762 x 562 x 301	121	200	800	XLD86321DKUFE	43-20268
	538	762 x 562 x 401	164	200	800	XLD86421DKUFE	43-22618
	638	762 x 562 x 501	206	200	800	XLD86521DKUFE	43-22616



With short side pick opening and fork entry shoes

External dimensions L x W	Height	Internal dimensions L x W x H	Pick opening W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	mm	litres	kg	kg		
800 x 600	420	762 x 562 x 301	459 x 153	121	200	800	XL86324DKufe	43-30249
	520	762 x 562 x 401	459 x 203	164	200	800	XL86424DKufe	43-30250
	620	762 x 562 x 501	459 x 253	206	200	800	XL86524DKufe	43-30251



With long side pick opening and fork entry shoes

External dimensions L x W	Height	Internal dimensions L x W x H	Pick opening W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	mm	litres	kg	kg		
800 x 600	420	762 x 562 x 301	459 x 153	121	200	800	XL86326DKufe	43-30252
	520	762 x 562 x 401	459 x 203	164	200	800	XL86426DKufe	43-30253
	620	762 x 562 x 501	459 x 253	206	200	800	XL86526DKufe	43-30254

CONTAINERS WITH FORK ENTRY SHOES 800 X 600

European size stacking containers



Accessories








B Security seals



Security seals



Covers for palletised loads



Label sheets



Label covers



G Slot-in divider strips




Insertable windows



Barcoded security seals



Multi-trip transport solution for bins and containers

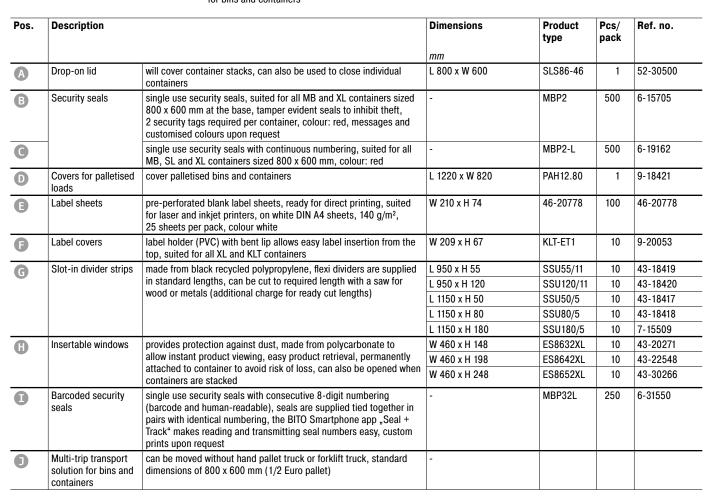

BITO

Heavy duty containers SL

The new generation ...

Stock loads as high as 500 kg in a BITOBOX sized 800 x 600 mm!



This heavy duty container series from BITO sets new standards in production, storage and transport logistics.

With an empty weight of 14.5 kg or 18 kg depending on the container height, the BITO SL weighs much less than a traditional wire-mesh box pallet or a steel sheet container, but provides a comparable load capacity.

BITO heavy duty containers are not only great for heavy weight loads. They are also ideal for large size products and goods which must be stored and shipped under absolutely clean and dustfree conditions.



Heavy duty containers





Product features



Drop door

Optionally available on short or long side. Jam-free operation due to synchronised hinges. Only one hand needed to close door, also when containers are stacked.



Double base

Welded sandwich construction for high load capacities. Version for automated bin storage (flat base, no runners) can be supplied upon request.



Runners

Suited for fork lift truck or hand pallet truck handling. Easy to mount and to remove. Convenient in-house transfer with a hand pallet truck or a container dolly. Can also be handled on powered and gravity-driven conveyors.



Dual colour design

Colour coding for easy stock identification: corner uprights can be supplied in various colours – ask for minimum order quantity.



Plenty of space for your company logo

Choose from various marking methods: injection moulding – pad print – screen print.



Lid options:

Hinged lid: firm fit, can be strap-sealed and security-sealed.

Drop-on lid: perfect protection against soiling, easy drop-on fitting and removal (supplied upon request).



Optimum container size

The trend towards reduced batch sizes demands smaller bulk storage containers. Advantage: more items can be stored on the same floor space.



Stacks up to 1500 kg

Safe stacking – even when fully loaded, static stacking load: 1500 kg, dynamic stacking load: 1000 kg



Light weight champion

Weighs much less than a same size metal container, but with similar load capacity



Clean and safe

Smooth internal sides allow easy cleaning, completely closed construction is ideal for storing and transporting liquids in jerrycans and drums.



Optional transport trolley ideal for in-house handling.




Heavy duty containers SL

Designed for premium performance – 500 kg load capacity

- Containers are the size of half a Euro pallet
- Load capacity 500 kg
- Static stacking load 1500 kg
- Dynamic stacking load 1000 kg
- Products are kept clean and safe in line with modern production principles
- Colour: grey











With solid sides

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
800 x 600	520	739 x 539 x 373	145	500	1500	SL86421K	52-30342
	720	739 x 539 x 573	223	500	1500	SL86621K	52-30343



With hinged two-part lid

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
800 x 600	541	739 x 539 x 373	145	500	1500	SLD86421K	52-30368
	741	739 x 539 x 573	223	500	1500	SLD86621K	52-30369

Heavy duty containers





With long side pick opening

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
800 x 600	520	739 x 539 x 373	145	500	1500	SL86426K	52-30364
	720	739 x 539 x 573	223	500	1500	SL86626K	52-30365



With short side pick opening


External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
800 x 600	520	739 x 539 x 373	145	500	1500	SL86424K	52-30354
	720	739 x 539 x 573	223	500	1500	SL86624K	52-30355



With half-drop door on the long side

Anti-jam half-drop door

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
800 x 600	520	739 x 539 x 373	145	500	1500	SLK86426K	52-30366
	720	739 x 539 x 573	223	500	1500	SLK86626K	52-30367



Heavy duty containers SL

with ready-mounted runners



With half-drop door on the short side

Anti-jam half-drop door

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
800 x 600	520	739 x 539 x 373	145	500	1500	SLK86424K	52-30356
	720	739 x 539 x 573	223	500	1500	SLK86624K	52-30357




With half-drop door on the short side and with hinged two-part lid

Anti-jam half-drop door

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
800 x 600	541	739 x 539 x 373	145	500	1500	SLDK86424K	52-30370
	741	739 x 539 x 573	223	500	1500	SLDK86624K	52-30371

Without fork entry shoes to suit automated storage

■ This container model is not stackable





Heavy duty containers



Accessories







B Label holders



Document pockets



Slot-in divider strips



E Intermediate drop-in-layers



Anti-slip matting



G Hand pallet trucks



H Transport dolly



Multi-trip transport solution for bins and containers

os.	Description		Dimensions	Product type	Pcs/ pack	Ref. no.
			mm			
A	Drop-on lid	will cover container stacks, can also be used to close individual containers	L 800 x W 600	SLS86-46	1	52-30500
В	Label holders	welded to container by manufacturer, protection for shipping docu-	W 240 x H 80	SL-ET1	1	52-30386
		ments and stock identification cards	W 240 x H 168	SL-ET2	1	52-30387
C	Document pockets,	ideal for frequent exchange of inserts, adhesive fabric backing	L 175 x W 105	MBET	10	6-5031
	self-adhesive 3 sides open	provides strong adhesion, colour transparent	L 210 x W 150	MBETDINA5	10	6-19528
D	Slot-in divider strips,	made from black recycled polypropylene, allow to subdivide contain-	L 724 x W 10 x H 120	52-30383	10	52-30383
	lengthwise	ers as required, can be cut to required length with a saw for wood or	L 724 x W 5 x H 180	52-30385	10	52-30385
	Slot-in divider strips,	metals (additional charge for ready cut lengths)	L 524 x W 10 x H 120	52-30382	10	52-30382
	crosswise		L 524 x W 5 x H 180	52-30384	10	52-30384
B	Intermediate drop-in- layers, for heavy duty containers SL	allow to store products in several layers in one and the same container	L 724 x W 524	52-30381	1	52-30381
B	Anti-slip matting, for heavy duty contain- ers SL	will protect container base from damage by rough infeeding of items	L 720 x W 520 x H 8	52-30380	10	52-30380
G	Hand pallet trucks	fork length 600 mm, width over forks 520 mm, load capacity 2000 kg, swivel castors and load rollers from polyurethane	L 600 x W 150	52-30379	1	52-30379
(1)	Transport dolly, for containers sized 800 x 600 mm	supplied with 2 swivel and 2 fixed castors, suited for containers sized 800 x 600 mm, made from polypropylene	L 800 x W 600	RU86.125	1	43-1150
Ð	Multi-trip transport solution for bins and containers	can be moved without hand pallet truck or forklift truck, standard dimensions of 800 x 600 mm (1/2 Euro pallet)	-			



Multi-trip transport solution


Pallet top cap and pallet dolly

This multi-trip solution for bins and containers handles your packaging and transport needs: easy to use, immediately operational, no packaging waste, safe, no service vehicles needed

Combine a pallet dolly + bins & containers + pallet top cap for moving loads safely around your premises. It also makes an ideal shipping unit to external destinations.

Benefit from the added economic and ecologic value:

- Loads are held in place by the pallet top cap and 2 integrated ratchet straps
- This compact solution saves on transport costs thanks to a smaller freight volume than f.ex. roll containers
- Substantial time and cost savings since there is no need for repeated re-packaging
- No packaging materials required (i.e. foil wrapping or plastic strapping)
- Loads can be moved without a hand pallet truck or a forklift truck
- When the unit is unloaded, pallet top caps and and pallet dollies can be stacked to save space on return trips

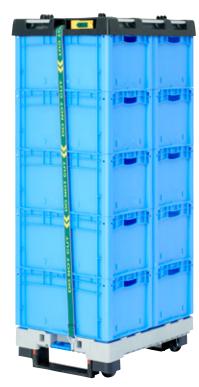

Convenient and fast handling by one person only



Place pallet top cap on bins



Pix tension straps



Tighten straps



4 Unlock dolly and get going

The ergonomic handle and the towing hitch allow you to move the pallet dolly without effort

A Towing coupler



A Handle



Welcome to the world of storage and handling

Multi-trip transport solution



Pallet top cap, with integrated tension straps

- Made of durable polypropylene with 2 integrated, self-retracting ratchet straps (length 2 m)
- Secures loads quickly and without wasting packaging materials
- Suited for a wide range of bins and containers such as multi-purpose containers MB, European size stacking containers XL, small parts containers KLT and heavy-duty containers SL
- Supplied with hook for dollies / transport trolleys
- Standard dimensions of 800 x 600 mm (1/2 Euro pallet)
- Pallet top cap and hook for other load carrier sizes and types (plastic pallets, wooden pallets, etc.) on request

Length	Width	Height	Max. loading height		Pack qty	Ref. no.
mm	mm	mm	mm	range		
822	618	93 mm	1980 mm	-20°C to +40°C	1	22-54830



Pallet dolly, top deck with load retaining lips

- Combines features and benefits of a pallet and a dolly
- The "pallet" converts into a dolly by actuating the foot pedal
- Can be moved without hand pallet truck or forklift truck
- Can be stacked for saving space on empty return trips
- Standard dimensions of 800 x 600 mm (1/2 Euro pallet)
- Made from polypropylene

Length	Width	Height	Floor clearance	Load capacity	Castors	Temperature range	Pack qty	Ref. no.
mm	mm	mm	mm	kg				
800	600	196 mm	36	250 kg	nylon	-20°C to +40°C	1	22-54831
			28	500 kg	nylon	-20°C to +40°C	1	22-54833



Accessories





A Handle

B Towing coupler

Pos.	s. Description		Load capacity	Length	Width	Height	Product type	Pcs/pack	Ref. no.
			kg	mm	mm	mm			
A	Handle	ergonomic easy-to-grip handle, hook-on fitting	-	1000	320	150	22-54835	1	22-54835
B	Towing	allows to tow 2 pallet dollies at a time	250	310	315	105	22-54836	1	22-54836
	coupler		500	310	315	105	22-54837	1	22-54837

Pallet dolly + bins + pallet top cap = compact material handling unit for use with the following bin & container series:

containers XL

European size stacking

from page 48

Small parts containers KLT



from page 64

Multi-purpose containers MB



from page 75

Heavy duty containers SL



from page 112



Pallet boxes

Heavy duty container in European pallet size and industry pallet size

- Load capacity 500 kg
- Large volume
- Made from PE-HD = long service life, 100% recyclable
- Double-walled, closed sides
- **■** Extremely strong
- Easy-to-clean inside shape and surfaces
- Reinforcing corner profiles enable safe stacking
- Drainage holes in the sides and the base
- Optionally available with long side pick opening
- Optionally with 4 feet, 4 castors or 3 runners
- Solid, injection-moulded lid (see accessories)







Description	External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
	mm	mm	mm	litres	kg	kg		
with 4 feet	1200 x 800	760	1100 x 710 x 610	535	500	4500	PC1871	7-11269
without drop door	1200 x 1000	760	1100 x 910 x 610	670	500	4500	PC1171	7-11276
with 4 castors	1200 x 800	915	1100 x 710 x 610	535	500	500	PCR1871	7-12933
without drop door	1200 x 1000	915	1100 x 910 x 610	670	500	500	PCR1171	7-12935
with 3 runners	1200 x 800	790	1100 x 710 x 610	535	500	4500	PC1873	7-15513
without drop door	1200 x 1000	790	1100 x 910 x 610	670	500	4500	PC1173	7-11280
with 4 feet	1200 x 800	760	1100 x 710 x 610	535	500	4500	PC1874	7-11270
long side pick opening 735 x 310 mm	1200 x 1000	760	1100 x 910 x 610	670	500	4500	PC1174	7-11277

Accessories



A Drop-on lid

Pos.	Description	To suit containers sized L x W	Product type	Ref. no.	
			mm		
A	Drop-on lid	reliable protection against soiling, individual covers can be nested to save	1200 x 800	PD800	7-11282
•		on space	1200 x 1000	PD1000	7-11283

Large volume nesting and folding containers




Folding pallet boxes

with 2 runners and 2 feet

Sturdy and functional construction ensures safe and efficient transport

- Also suited for storage in high bay racking
- Good travel characteristics on powered conveyors
- Drop doors at the long and the short side
- Hardwearing, easy-to-exchange closure
- Convenient handling and easy cleaning
- Container base with 4 drainage holes Ø 20 mm
- Folded height 460 mm only

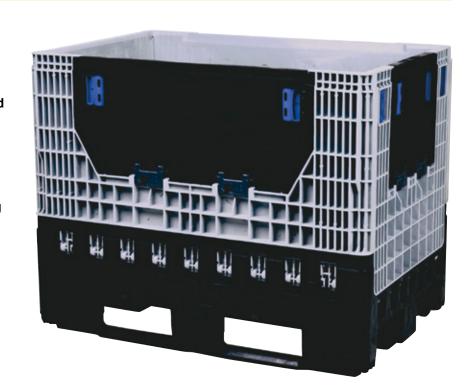









With 2 runners and 2 feet

External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Weight	Bin type	Colour	Ref. no.
mm	mm	mm	litres	kg	kg	kg			
1200 x 800	950	1120 x 720 x 765	620	500	2000	55.00	PK188	grey	7-15512

Accessories



A Lids

Pos.	. Description		To suit containers sized L x W	Product type	Ref. no.	
			mm			
A	Lids	reliable protection against soiling	1200 x 800	PKD800	7-15511	



Large volume nesting and folding containers




Folding bulk containers

Protect your goods from dust and dirt during storage and transport!

- 3-part system = pallet + sides + lid
- Picking flap on the long side
- Very strong foldable side construction from impactresistant plastic
- Supplied with 9 feet each
- Considerable reduction in volume when empty (folded height about 250 mm, volume savings up to 77%)
- Low proper weight
- Easy to handle
- 100% recyclable
- **Application of customer specific** logos and custom prints possible
- **Containers with fork entry shoes** upon request



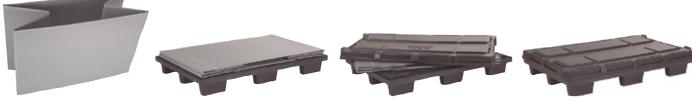

Folds away when not in use



Description	External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Stacking load	Load capacity	Bin type	Ref. no.			
	mm	mm	mm	litres	kg	kg					
with feet	1200 x 800	1200 x 800	1200 x 800	1200 x 800	00 885 1155 x 7	1155 x 755 x 725	606	1000	1200	BMD1280S	7-20050
					500	1200	BMD1280	7-20047			
	1245 x 845	855	1200 x 800 x 695	667	1000	1200	BMD1280IS	7-20051			
					500	1200	BMD1280I	7-20048			
with ready-mounted	1200 x 1000	1090	1160 x 960 x 925	1030	1000	1200	BMD1210S	7-20052			
runners					500	1200	BMD1210	7-20049			



Plastic pallets

The modern alternative to wooden pallets


- All pallets from recycling material
- Available as stackable or nestable version







A Display pallets K9, nestable



B Display pallets K9



Light duty pallets K8 with feet, nestable



Heavy duty pallets K2 with feet, nestable



Pallets K6 with runners, stackable



Pallets K1 with runners, stackable

Pos.	External dimensions L x W	Height	Static load capacity	Dynamic load capacity	Rack load capacity	Description	Colour	Ref. no.	Pack quantity
	mm	mm	kg	kg	kg				
A	600 x 400	150	500	200		without retaining lip	black	7-30291	30 pcs
B	800 x 600	115	1000	500		without retaining lip	black	7-20038	30 pcs
C	1200 x 800	155	2500	1000		deck with load retaining lip	grey	7-20039	40 pcs
	1200 x 1000	155	2500	1000		deck with load retaining lip	grey	7-20040	40 pcs
D	1200 x 800	145	4000	1200		without retaining lip	black	7-20041	40 pcs
	1200 x 1000	145	4000	1200		without retaining lip	black	7-20042	40 pcs
B	1200 x 800	150	6000	2500	500	without retaining lip	grey	7-20043	20 pcs
	1200 x 1000	150	5000	1500	400	without retaining lip	grey	7-20044	20 pcs
B	1200 x 800	155	7500	2500	1250	deck with load retaining lip	grey	7-20045	20 pcs
	1200 x 1000	155	7500	2500	1250	deck with load retaining lip	grey	7-20046	20 pcs



BITO plastic bins and containers

designed for use in storage, distribution and assembly environments

Less packaging waste, lower storage and freight costs, easy handling, a robust make, a broad range of models and variations, ergonomic design and a 5 year assurance on quality and function are just some of the benefits provided by a BITOBOX.

BITO provides an impressive range of bins and containers for any application - from bins and containers for storage and order picking over various stacking container series in European standard sizes, multi-purpose containers, bins and trays for automated small parts facilities to pallet containers.





Case studies

Your benefits

- Great for distribution and transport, storage and order picking
- Particularly hard-wearing and durable
- Safe stacking
- Wide range of accessories
- **Customised solutions**
- Company logos and messages can be applied by screen print, pad print or hot stamping
- Electro-conductive version upon request
- Ecologically responsible, as containers can be recycled

Designed for use on conveyors...



...in shelving and racking



...in the order picking process



...in distribution chains



...in assembly areas



Further information on this product is provided in our catalogue $\mbox{\bf PROJECT}$ **GUIDE** which is available free of charge. To obtain your copy please send us an email to info@bito.com








BITO shelving and racking systems are manufactured in our plant at Meisenheim — for load capacities between 50 to 4500 kg per storage level, for small, large, light weight, heavy weight, bulky and long goods, for use as stand-alone bays as well as in multi-tier facilities.

BITO shelving and racking is made with the latest state-of-the-art technology. The high degree of automation such as in the steel bending process makes sure that all products are absolutely true to size and of a consistent quality. Moreover, professional production planning and tool engineering, optimised manufacturing processes and a competent order management guarantee efficient lead times.

BITO will be pleased to assist you in choosing the optimum solution!

Please note: This racking system has been designed for in-door use only. The indicated load capacities are not valid for earthquake hazard zones. If your storage and order picking facility is intended for use in a seismic hazard zone, please inform BITO in advance!

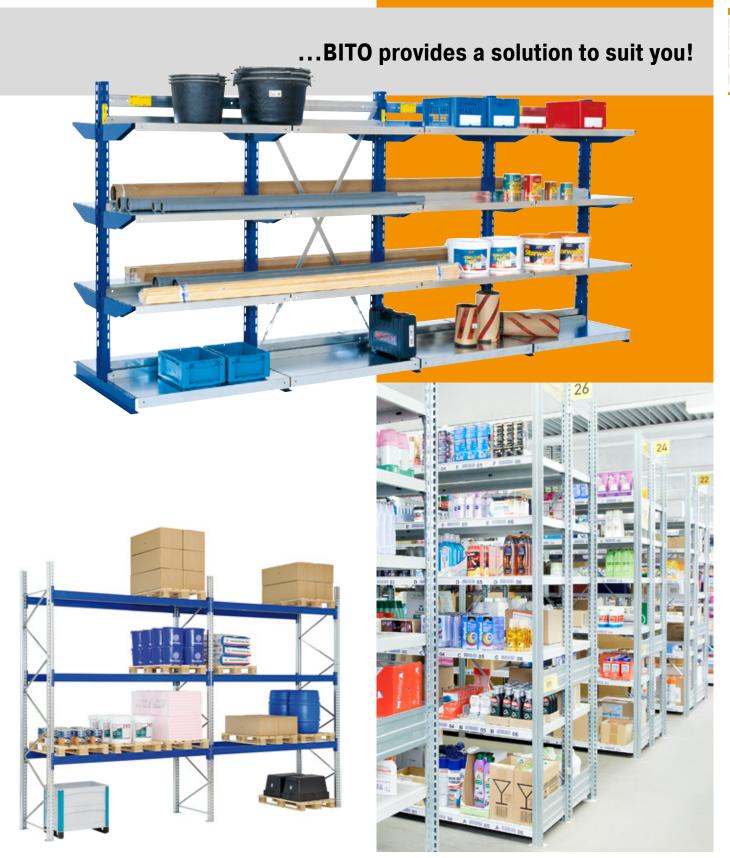



Contents

Shelving128
Archive shelving 130
Boltless shelving for industry requirements 132
Shelving132
Light duty shelving type EL - shelf load 100 kg 132
Light duty shelving type L - shelf load 100 kg 133
Medium duty shelving type M - shelf load 200 kg 134
Heavy duty shelving type S - shelf load 300 kg 135
Shelving with extra large shelves 136
Shelving with extra large chipboard shelves 136
Shelving with extra large steel shelves137
Boltless shelving for industry requirements 138
Shelving with inclined shelves
Shelving
Tyre shelving
Hose shelving
Supply shelving
Kanban bin shelving for small parts 144
Boltless shelving complete with RK bins 145
Boltless shelving complete with SK bins 146
Hose shelving148
Cabinets for fire fighting equipment
Boltless shelving with wire baskets - wire baskets 150
Shelving with wire shelves - wire shelves151
Corner shelving
Tyre shelving 153
Shelving for industry requirements
- accessories 154
Frames
Louvered panels
Back cladding
Shelves
Shalf ladges 160

Shelving & Racking



Wire shelves GRID	161
Beams	162
Shelf dividers	163
Bin shelves for loose goods	164
Vertical storage	164
Wire-mesh partitions	165
Further accessories	166
Hinged doors	167
Retrofit drawers	168
Stainless steel shelving	170
Wide span shelving	172
Wide span shelving	
Frames	
Complete levels	177
Wide span shelving – coordinating products	179
Pallet racking	180
PRO Pallet racking	180
Pallet racking - complete units	182
Pallet racking frames	185
Beams	187
Level decking options to fit BITO-TwinTop® bear	ms 188
Pull-out units	190
Rack end barrier	191
Shelving & racking protection	192
Flexible upright protectors	193
Safety equipment	194
Order picking of palletised loads .	196
Pallet live storage	196
Heavy duty roller tracks	200
Order picking of light and	201
medium-weight loads Carton live storage	
Oai (UII IIVG S(UI ayG	202

Carton live storage Flex	206
Carton live storage Flex - Set offer	208
Complete levels	210
Cantilever racking	. 212
Cantilever racking for light duty applications .	212
Cantilever racking type L	213
Cantilever racking type S	216
Cantilever racking components type L and S	218
Racks for vertical storage	220
	222
Cantilever racking for heavy duty applications.	
Cantilever racking for heavy duty applications. Cantilever racking type ES	224
Cantilever racking type ES	226
Cantilever racking type ES Cantilever racking components type ES	226 228

Boltless shelving

Neat product presentation in office and workshop environments

BITO Shelving provides utmost versatility as it adapts to any location. Assembly is fast and easy without nuts and bolts and can be done by anyone as no special skills are required. The modular system allows the addition of extra shelves and bays as needed.

BITO shelving comes with a very broad range of accessories to suit any environment and industry. The robust make also allows for multi-tier installations. Please contact our sales team to discuss your requirements.

Please note: This racking system has been designed for in-door use only. The indicated load capacities are not valid for earthquake hazard zones. If your storage and order picking facility is intended for use in a seismic hazard zone, please inform BITO in advance!



Load cap. per level								
Shelf width	750 mm	1.000 mm	1.300 mm	1.500 mm	2.000 mm			
Useable depth	Load capacities (UDL)							
300 mm	200 kg	100, 200 kg	100, 200 kg	-	-			
400 mm	200 kg	100, 200, 300 kg	100, 200 kg	-	-			
500 mm	200 kg	100, 200, 300 kg	100, 200 kg	350 kg	350 kg			
600 mm	200 kg	100, 200, 300 kg	100, 200 kg	350 kg	350 kg			
800 mm	200 kg	200 kg	200 kg	350 kg	350 kg			

Max. shelf/bay loads									
Shelving type	EL (starting on page 132)	L (starting on page 133)		Shelving with extra large shelves (starting on page 136)					
Max. shelf load	100 kg	100 kg	200 / 300 kg	350 kg					
Max. bay load	800 kg	1.300 kg	1.600 kg	1.600 kg					

Shelving

Shelving

Quick and easy to assemble in just a few steps





Scan this QR code: Instructions on assembly and use for boltless shelving www.bito.com/en-gb/downloads













Uprights

- High load capacities are achieved through precision steel bending to ensure sufficient rigidity for realising shelving heights of up to 10 metres.
- Slim 50 mm profiles contribute to maximum space utilisation.

Frames

- Easy boltless assembly on site for perfect adaptation to your location.
- Level spacing can be adjusted in 25 mm increments to suit your needs.

Beams

- Beams and uprights form a solid force-fit connection that provides excellent lateral stability. The three location hooks of each beam connector conveniently slot into the upright perforations.
- Safety pins prevent that the beam is accidentally dislodged.

Shelves


- Solid shelves with shelf clips Our shelves feature box-profiled edges at the long sides and triple edge bending at the short sides.
- Reinforcing lengthwise beads and pressure joined corners ensure excellent stability.
- All shelves are perforated to accommodate shelf dividers.

a

BITO info

Epoxy-coating

At a small extra charge, frame uprights can be supplied with a high-quality epoxy coated finish in RAL 3000 Flame red, RAL 5010 Gentian blue and RAL 7035 Light grey!



Guide to planning your shelving installation:

Nominal dimensions: Shelf widths:

750, 1000 and 1300 mm External bay depths: 324, 424, 524, 624 and 824 mm Shelf depths:

300, 400, 500, 600 and 800 mm

Space utilisation:
Width of starter bay:
Nominal shelf width + 58 mm
Width of extension bay:
Nominal shelf width + 8 mm
Shelving depth of starter and extension bay:
Nominal size + 24 mm

Archive shelving

single sided use, galvanised finish

Everything in its right place!

- Shelf load: 70 kg
- Bay load: 500 kg
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments





Width of starter bay 1058 mm 808 mm



Width of extension bay 1008 mm 758 mm



Set offer including 1 starter bay and 1 extension bay

supplied with 12 shelves for 144 lever arch files H x W x D: 2200 x 2066 x 324 mm

Ref. no. 10-52945

					Shelving type	Starter bay	Extension bay
Shelving height	Number of shelves	External bay depth	Useable depth	Shelf width	File capacity	Ref. no.	Ref. no.
mm		mm	mm	mm			
1850	5	324	300	1000 mm	60	10-12640	10-12641
2200	6				72	10-12644	10-12645
2500	7				84	10-12648	10-12649
3000	8				96	10-12652	10-12653

Accessories









Shelf ledges





Safety accessories such as anchor bolts and wall mounting sets on page 157

	Shelves,	25	mm	hial
WAY	JIICIVCS,	20	111111	HIIGH



	Cido	protection
1	Side	protection

Pos.	Description		For a shelf width of	For a shelving depth of	Ref. no.
			mm	mm	
A	Shelves, 25 mm high	set includes 4 shelf clips, shelf height 25 mm, with shelf perforations for dividers, supplied with 4 shelf clips, ultra flat shelves help you make the most of your storage space	1000	300	10-C1165-0006
B	Shelf dividers	slot-in fitting, for 25 mm high shelves, stand-alone, subdivide storage levels into several	-	300	10-52213
		compartments, immediate stock identification even if several references are stocked on the	-	300	10-52214
		same level, convenient slot-in fitting into shelf perforations, galvanised	-	300	10-52215
C	Shelf ledges	for 25 mm high shelves, to be inserted between shelf and shelf clips, the edge prevents loads from slipping, galvanised	1000	-	10-52182
D	Side protection	prevents objects from falling at the shelving sides, particularly suited for office and archive shelving, boltless assembly, easy fixing to frame with 2 plastic rivets included in the delivery, can be retro-fitted, galvanised finish	-	300	10-12833

Archive shelving

double sided use, galvanised finish

Everything in its right place!

■ Shelf load: 100 kg Bay load: 800 kg

Fast and easy assembly without bolts saves time

Extensions possible at any time

Shelf levels adjustable in 25 mm increments

■ Shelves are perforated to accept centre rail for files





1058 mm

808 mm




1 extension bay

supplied with 12 shelves for 288 lever arch files H x W x D: 2200 x 2066 x 624 mm

			Shelf width	750 mm		1000 mm	
			Shelving type	Starter bay	Extension bay	Starter bay	Extension bay
Shelving height	Number of shelves	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm		mm	mm				
1850	5	624	600	10-26860	10-26864	10-17149	10-17150
2200	6			10-26861	10-26865	10-17151	10-17152
2500	7			10-26862	10-26866	10-17153	10-17154
3000	8			10-26863	10-26867	10-17155	10-17156

Accessories







B Centre rails



Side protection



Safety accessories such as anchor bolts and wall mounting sets on page 157

Pos.	Description		For a shelf width of	For a shelving depth of	Ref. no.
			mm	mm	
A	Shelves, 40 mm high	set includes 4 shelf clips, shelf height 40 mm, with shelf perforations for dividers, supplied with 4 shelf clips	1000	600	10-17066
В	Centre rails	for double sided use, convenient slot-in fitting into shelf perforations, suited for office and archive shelving, galvanised	1000	600	10-6638
G	Side protection	prevents objects from falling at the shelving sides, particularly suited for office and archive shelving, boltless assembly, easy fixing to frame with 2 plastic rivets included in the delivery, can be retro-fitted, galvanised finish	-	600	10-12836

Light duty shelving type EL - shelf load 100 kg

galvanised finish

Ideal for light weight loads


- Shelf load: 100 kg ■ Bay load: 800 kg
- Ideal for storing bins, small parts and loose items
- Assembly without beams, with cross bracing
- Optimum subdivision of shelf space with dividers that slot into the shelf perforations on the long sides
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments





Width of starter bay 1058 mm 1358 mm Width of extension bay 1008 mm 1308 mm





supplied with 5 shelves each H x W x D: $2000 \times 2066 \times 524 \text{ mm}$

Ref. no. 10-52947

22	
	THE REAL PROPERTY OF THE PARTY

			Shelf width	1000 mm		1300 mm	
			Shelving type	Starter bay	Extension bay	Starter bay	Extension bay
Shelving height	Number of shelves	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm		mm	mm				
2000	5	324	300	10-17024	10-17029	10-17034	10-17039
		424	400	10-17025	10-17030	10-17035	10-17040
		524	500	10-17026	10-17031	10-17036	10-17041
		624	600	10-17027	10-17032	10-17037	10-17042
2500	6	324	300	10-17044	10-17049	10-17054	10-17059
		424	400	10-17045	10-17050	10-17055	10-17060
		524	500	10-17046	10-17051	10-17056	10-17061
		624	600	10-17047	10-17052	10-17057	10-17062

Accessories



9

Safety accessories such as anchor bolts and wall mounting sets on page 157



			Shelf width	1000 mm	1300 mm
Pos.	Description		For a shelving depth of	Ref. no.	Ref. no.
			mm		
A	Shelves, 40 mm high	set includes 4 shelf clips, shelf height 40 mm, with shelf	300	10-17064	10-17069
		perforations for dividers, supplied with 4 shelf clips	400	10-17065	10-17070
			500	10-16963	10-17071
			600	10-17066	10-17072

Light duty shelving type L - shelf load 100 kg

galvanised finish


Easy to assemble, functional and versatile

Shelf load: 100 kg

Bay load: 1300 kg - 1600 kg

- Ideal for storing bins, small parts and loose items
- Assembly with beams and cross bracing
- Optimum subdivision of shelf space with dividers that slot into the shelf perforations on the long sides
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments





starter bay 1058 mm 1358 mm

extension bay 1008 mm 1308 mm



Set offer including 1 starter bay and 1 extension bay

supplied with 5 shelves each H x W x D: 2000 x 2066 x 524 mm Ref. no. 10-52948

Extension bay

with 5 shelves

H x W x D: 2000 x 1008 x 524 mm

Ref. no. 10-17181

				Shelf width	1000 mm		1300 mm	
				Shelving type	Starter bay	Extension bay	Starter bay	Extension bay
Shelving height	Bay load	Number of shelves	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm	kg		mm	mm				
2000	1300	5	324	300	10-17174	10-17179	10-17184	10-17189
			424	400	10-17175	10-17180	10-17185	10-17190
			524	500	10-17176	10-17181	10-17186	10-17191
			624	600	10-17177	10-17182	10-17187	10-17192
2500	1430	6	324	300	10-17194	10-17199	10-17204	10-17209
			424	400	10-17195	10-17200	10-17205	10-17210
			524	500	10-17196	10-17201	10-17206	10-17211
			624	600	10-17197	10-17202	10-17207	10-17212
3000	1600	7	324	300	10-17214	10-17219	10-17224	10-17229
			424	400	10-17215	10-17220	10-17225	10-17230
			524	500	10-17216	10-17221	10-17226	10-17231
			624	600	10-17217	10-17222	10-17227	10-17232

Accessories





Safety accessories such as anchor bolts and wall mounting sets on page 156

Additional shelves

			Shelf width	1000 mm	1300 mm
Pos.	Description		For a shelving depth of	Ref. no.	Ref. no.
			mm		
A	Shelves, 40 mm high	set includes 4 shelf clips, shelf height 40 mm, with shelf	300	10-17064	10-17069
		perforations for dividers, supplied with 4 shelf clips	400	10-17065	10-17070
			500	10-16963	10-17071
			600	10-17066	10-17072





Medium duty shelving type M - shelf load 200 kg

galvanised finish

Our versatile range for medium weight duties

Shelf load: 200 kg

Bay load: 1300 kg - 1600 kg

- Ideal for storing bins, small parts and loose items
- Assembly with beams and cross bracing
- Optimum subdivision of shelf space with dividers that slot into the shelf perforations on the long sides
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments



The ideal match: our nestable and stackable BITOBOX MB containers can be found from page 74





Width of Width of extension bay starter bay 1058 mm 1008 mm 1358 mm 1308 mm

Set offer including 1 starter bay and 1 extension bay

supplied with 5 shelves each H x W x D: 2000 x 2066 x 524 mm Ref. no. 10-52949

Extension bay

with 5 shelves H x W x D: 2000 x 1008 x 524 mm Ref. no. 10-17091

				Shelf width	1000 mm		1300 mm	
				Shelving type	Starter bay	Extension bay	Starter bay	Extension bay
Shelving height	Bay load	Number of shelves	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm	kg		mm	mm				
2000	1300	5	324	300	10-17084	10-17089	10-17094	10-17099
			424	400	10-17085	10-17090	10-17095	10-17100
			524	500	10-17086	10-17091	10-17096	10-17101
			624	600	10-17087	10-17092	10-17097	10-17102
			824	800	10-17088	10-17093	10-17098	10-17103
2500	1430	6	324	300	10-17104	10-17109	10-17114	10-17119
			424	400	10-17105	10-17110	10-17115	10-17120
			524	500	10-17106	10-17111	10-17116	10-17121
			624	600	10-17107	10-17112	10-17117	10-17122
			824	800	10-17108	10-17113	10-17118	10-17123
3000	1600	7	324	300	10-17124	10-17129	10-17134	10-17139
			424	400	10-17125	10-17130	10-17135	10-17140
			524	500	10-17126	10-17131	10-17136	10-17141
			624	600	10-17127	10-17132	10-17137	10-17142
			824	800	10-17128	10-17133	10-17138	10-17143

Accessories





Safety accessories such as anchor bolts and wall mounting sets on page 156

Additional shelves

	additional oneives		Shelf width	1000 mm	1300 mm
Pos.	Description		For a shelving depth of	Ref. no.	Ref. no.
			mm		
A	Shelves, 40 mm high	set includes 4 shelf clips, shelf height 40 mm, with shelf	300	10-17074	10-17079
		perforations for dividers, supplied with 4 shelf clips	400	10-17075	10-17080
			500	10-17076	10-17081
			600	10-17077	10-17082
			800	10-17078	10-17083

Heavy duty shelving type S - shelf load 300 kg

galvanised finish

Our heavy duty option

■ Shelf load: 300 kg

Bay load: 1300 kg - 1600 kg

Ideal for storing bins, small parts and loose items

Assembly with beams and cross bracing

Optimum subdivision of shelf space with dividers that slot into the shelf perforations on the long sides

- Fast and easy assembly without bolts saves time
- Extensions possible at any time

extension bay

1008 mm

Shelf levels adjustable in 25 mm increments





Set offer including 1 starter bay and 1 extension bay

supplied with 5 shelves each H x W x D: 2000 x 2066 x 524 mm Ref. no. 10-52950

Extension bay

with 5 shelves H x W x D: 2000 x 1008 x 524 mm Ref. no. 10-17591

				Shelf width	1000 mm		
				Shelving type	Starter bay	Extension bay	
Shelving height	Bay load	Number of shelves	External bay depth	Useable depth	Ref. no.	Ref. no.	
mm	kg		mm	mm			
2000	1300	5	424	400	10-17588	10-17589	
				524	500	10-17590	10-17591
			624	600	10-17592	10-17593	
2500	2500	1430	6	424	400	10-17594	10-17595
			524	500	10-17596	10-17597	
			624	600	10-17598	10-17599	
3000	1600	7	424	400	10-18116	10-18119	
			524	500	10-18117	10-18120	
			624	600	10-18118	10-18121	

Accessories

Width of

starter bay

1058 mm



Safety accessories such as anchor bolts and wall mounting sets on page 156

Additional shelves

			Shelf width	1000 mm
Pos.	Description		For a shelving depth of	Ref. no.
			mm	
A	Shelves, 40 mm high	set includes 4 shelf clips, shelf height 40 mm, with shelf perforations for	400	10-17584
		dividers, supplied with 4 shelf clips	500	10-17585
			600	10-17586



Shelving with extra large chipboard shelves

galvanised finish

Odd-shaped goods? This is your shelving!

- Shelf load: 350 kg
- Bay load: max. 1600 kg
- Ideal for storing large or bulky goods
- **Shelf levels consist** of beams and drop-in chipboard panels
- Assembly with beams, without cross bracing
- Fast and easy assembly without bolts saves time
- Extensions possible at any
- Levels adjust in height on a 25 mm pitch





Width of starter bay 1562 mm

2066 mm



Width of extension bay 1512 mm 2016 mm

Set offer including 1 starter bay and 1 extension bay:

supplied with 2 shelf levels each H x W x D: 2000 x 4082 x 624 mm Ref. no. 47-52951



2066 mm	2016 mm	2016 mm		1500 mm		2000 mm	
			Shelving type	Starter bay	Extension bay	Starter bay	Extension bay
Shelving height	Number of levels	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm		mm	mm				
2000	3	524	500	47-13483	47-13519	47-13501	47-15537
		624	600	47-13486	47-13522	47-13504	47-13540
		824	800	47-13489	47-13525	47-13507	47-13543
2500	4	524	500	47-13492	47-13528	47-13510	47-13546
		624	600	47-13495	47-15531	47-13513	47-13549
		824	800	47-13498	47-15534	47-13516	47-13552

Accessories



Additional shelf levels for wide span shelving

	v
\rightarrow	. 1

Safety accessories such as anchor bolts and wall mounting sets on page 157

Pos.	Description		For a bay width of	For a shelving depth of	Ref. no.
			mm	mm	
A		for shelving with extra large chipboard shelves, supplied with 2 galvanised beams	1500	500	10-13555
		with support bars and, depending on the bay width, 3 or 4 chipboard panels		600	10-13556
				800	10-13557
			2000	500	10-13558
				600	10-13559
				800	10-13560



Shelving with extra large steel shelves

galvanised finish

Great for goods which need some more space!

- Shelf load: 350 kg
- Bay load: max. 1600 kg
- Ideal for storing large or bulky goods
- Shelf levels consist of beams and drop-in steel panels
- Assembly with beams, without cross bracing
- Fast and easy assembly without bolts saves time
- Extensions possible at any
- Levels adjust in height on a 25 mm pitch





2066 mm

2016 mm

Width of Width of starter bay extension bay 1562 mm 1512 mm


Set offer including 1 starter bay and 1 extension bay:

supplied with 2 shelf levels each H x W x D: 2000 x 4082 x 624 mm Ref. no. 47-52952



			Bay width	1500 mm		2000 mm	
			Shelving type	Starter bay	Extension bay	Starter bay	Extension bay
Shelving height	Number of levels	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm		mm	mm				
2000	3	524	500	47-27100	47-27112	47-16428	47-16432
		624	600	47-27101	47-27113	47-16436	47-16440
		824	800	47-27102	47-27114	47-16444	47-16448
2500	4	524	500	47-27124	47-27136	47-16455	47-16459
		624	600	47-27125	47-27137	47-16463	47-16467
		824	800	47-27126	47-27138	47-16471	47-16475

Accessories



Additional shelf levels for wide span shelving

Safety accessories such as anchor bolts and wall mounting sets on $% \left\{ 1,2,\ldots ,n\right\}$ page 157

Pos.	Description		For a bay width of	For a shelving depth of	Ref. no.
			mm	mm	
A	Additional shelf leves	for shelving with extra large steel shelves, supplied with 2 galvanised beams	1500	500	10-27148
	with adapters and 2 steel panels	with adapters and 2 steel panels		600	10-27149
				800	10-27150
			2000	500	10-16425
				600	10-16426
				800	10-16427

Shelving with inclined shelves

shelf level incline 30°

Perfect product presentation

■ Shelf load: 100 kg■ Bay load: 800 kg

- Ideal for picking items from bins and containers
- Assembly with beams, without cross bracing
- Inclined position of bins allows a better overview and faster ergonomic picking
- Easy picking, as stocked items always move to the picking face
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Levels adjust in height on a 25 mm pitch







Set offer including 1 starter bay and 1 extension bay:

supplied with 3 inclined shelf levels each H x W x D : $1850 \times 2666 \times 524 \text{ mm}$

Ref. no.: 10-52953

			Shelf width				
				Set offer including 1 starter bay and 1 extension bay	Starter bay	Extension bay	
Shelving height	Number of shelves	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	
mm		mm	mm				
1850	3	524	570	10-52953	10-52954	10-52955	

Accessories





(→
	Safety accessories such as anchor bolts
a	nd wall mounting sets on page 157

Pos.	Description		For a shelf width of	For a shelving depth of	Ref. no.
			mm	mm	
A	Inclined shelves	supplied with 2 stiffening beams, galvanised, load capacity 100 kg	1300	570	10-7704

Shelving with inclined shelves

Bin trolleys, shelf level incline 30°

Mobile product supply

■ Shelf load: 100 kg ■ Bay load: 500 kg

- Ideal for picking items from bins and containers
- Mobile shelving units offer more flexibility in your operations
- The ergonomically designed push handle and easy-to-move fixed and swivel castors provide excellent mobility
- Inclined position of bins allows a better overview and faster ergonomic picking
- Easy picking, as stocked items always move to the picking face



Inclination 30°

Shelving height	Number of shelves	External bay depth	Useable depth	Shelf width	Description	Ref. no.
mm		mm	mm	mm		
1815	4	533	570	1300	without bins, mobile version	10-15182
					with bins, mobile version	10-15183




Shelving

Bin trolleys, with straight shelf levels

Perfect combination

Shelf load: 100 kgBay load: 600 kgIdeal for bin storage



✐

- Assembly with beams, without cross bracing
- Mobile shelving units offer more flexibility in your operations
- The ergonomically designed push handle and easy-to-move fixed and swivel castors provide excellent mobility
- Levels adjust in height on a 25 mm pitch
- Also available in other dimensions: L 1000 x D 500/600/800 mm und L 1300 mm x D 600/800 mm

Shelving height	Number of shelves	External bay depth	Useable depth	Shelf width	Features	Ref. no.
mm		mm	mm	mm		
1815	7	533	500	1000 18 x SK5032 (500 x 315 x 200 mm)		10-15721
					without bins	10-15720

Tyre shelving

Bin trolleys

Proper and space-saving tyre storage

Shelf load: 150 kgBay load: 300 kgIdeal for tyre storage

- Suitable for tyre diameters from 578 to 624 mm
- The ergonomically designed push handle and easy-to-move fixed and swivel castors provide excellent mobility
- 2 storage levels complete with special profile beams designed for gentle storage and in-house transport of tyres and rims



Shelving height	Shelf width	Number of shelves	External bay depth	Useable depth	Ref. no.
mm	mm		mm	mm	
1625	1300	2	682	424	10-40200

Hose shelving

Bin trolleys, galvanised finish

Easy access - easy picking!

■ Shelf load: 100 kg ■ Bay load: 500 kg

- Facilitates transport of hoses to and from emergency vehicles
- The ergonomically designed push handle and easy-to-move fixed and swivel castors provide excellent mobility
- Trapeze-shaped shelves with integral discharge trough provide non-slip, dry and easily accessible storage space
- Levels adjust in height on a 25 mm pitch

Shelving height	External bay width	External bay depth	Number of levels	Castor Ø	Surface finish	Ref. no.
mm	mm	mm		mm		
1815	1068	524	3	125	galvanised	17-13091



Supply shelving

single depth, straight shelves, galvanised finish

Make sure you never run out of supplies ...

- Shelf load: 100 kg
- Bay load: 800 kg
- Suited for double sided use
- Ideal for supplying workstations with parts and components
- Assembly with beams, without cross bracing
- Shelves sit safely between the beams; added strength and rigidity
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments





Width of starter bay 1058 mm 1358 mm Width of extension bay 1008 mm

1308 mm



Starter bay

H x W x D: 2000 x 1358 x 624 mm Ref. no. 10-23624




<u>,</u>		Shelf width	1000 mm 1		1300 mm		
			Shelving type	Starter bay	Extension bay	Starter bay	Extension bay
Shelving height	Number of shelves	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm		mm	mm				
2000	4	424	400	10-23576	10-23577	10-23620	10-23621
		524	500	10-23578	10-23579	10-23622	10-23623
		624	600	10-23580	10-23581	10-23624	10-23625
		824	800	10-23582	10-23583	10-23626	10-23627

Accessories







			Shelf width	1000 mm	1300 mm
Pos.	Description		For a shelving depth of	Ref. no.	Ref. no.
			mm		
A	Additional levels	single depth shelf levels, single depth straight shelf	400	10-23584	10-23628
	levels		500	10-23585	10-23629
			600	10-23586	10-23630
			800	10-23587	10-23631



Supply shelving

single depth, inclined shelves, galvanised finish

Perfect for supplying parts and components at workstations

■ Shelf load: 100 kg Bay load: 800 kg


Easy-to-view product presentation, easy access and ergonomic retrieval

Level decking sits safely between the beams; added strength and rigidity

■ Side lips and front lip prevent storage units from jamming or dropping







Width of	Width of
starter bay	extension bay
1058 mm	1008 mm
1358 mm	1308 mm

		Shelf width	1000 mm		1300 mm		
			Shelving type	Starter bay	Extension bay	Starter bay	Extension bay
Shelving height	Number of shelves	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm		mm	mm				
2000	4	424	400	10-52956	10-52957	10-52964	10-52965
		524	500	10-52958	10-52959	10-52966	10-52967
		624	600	10-52960	10-52961	10-52968	10-52969
		824	800	10-52962	10-52963	10-52970	10-52971

Starter bay

Accessories



•
Safety accessories such as
anchor bolts and wall mounting
sets on page 157

			Shelf width	1000 mm	1300 mm
Pos.	Description		For a shelving depth of	Ref. no.	Ref. no.
			mm		
A	Additional levels	single depth shelf levels, single depth inclined shelf levels	400	10-23572	10-23616
			500	10-23573	10-23617
			600	10-23574	10-23618
			800	10-23575	10-23619

Supply shelving


double depth, rear shelf straight, front shelf inclined, galvanised finish

Designed to suit all applications

Shelf load: 100 kg Bay load: 800 kg

- Suited for double sided use
- Easy-to-view product presentation, easy access and ergonomic retrieval
- Assembly with beams, without cross bracing
- Shelves sit safely between the beams; added strength and rigidity
- Side lips and front lip prevent storage units from jamming or dropping
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments







extension bay 1008 mm 1308 mm

Starter bay

TOP SELLER

H x W x D: 2000 x 1358 x 1250 mm Ref. no. 10-52984

		Shelf width	1000 mm		1300 mm		
			Shelving type	Starter bay	Extension bay	Starter bay	Extension bay
Shelving height	Number of shelves	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm		mm	mm				
2000	4	850	800	10-52972	10-52973	10-52980	10-52981
		1050	1000	10-52974	10-52975	10-52982	10-52983
		1250	1200	10-52976	10-52977	10-52984	10-52985
		1650	1600	10-52978	10-52979	10-52986	10-52987

Accessories





€	
Safety	accessories such as anchor bolts
and wa	Il mounting sets on page 157

			Shelf width	1000 mm	1300 mm
Pos.	Description		For a shelving depth of	Ref. no.	Ref. no.
			mm		
A	Additional levels double depth shelf levels, rear shelf straight, front shelf		800	10-23560	10-23604
	inclined, with 2 shelves, galvanised	1000	10-23561	10-23605	
			1200	10-23562	10-14696
			1600	10-23563	10-23607

5

Boltless shelving for industry requirements

BITO

Supply shelving

double depth, rear and front shelf inclined, galvanised finish

Storage in FIFO order and reliable product supply

■ Shelf load: 100 kg ■ Bay load: 800 kg

- Suited for double sided use
- Easy-to-view product presentation, easy access and ergonomic retrieval
- Assembly with beams, without cross bracing
- Shelves sit safely between the beams; added strength and rigidity
- Side lips and front lip prevent storage units from jamming or dropping
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments







Width of Width of starter bay extension bay 1058 mm 1308 mm

Starter bay


H x W x D: 2000 x 1358 x 1250 mm Ref. no. 10-53000



Suitable bins from page 48

		Shelf width	1000 mm 1300		1300 mm	300 mm	
			Shelving type	Starter bay	Extension bay	Starter bay	Extension bay
Shelving height	Number of shelves	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm		mm	mm				
2000	4	850	800	10-52988	10-52989	10-52996	10-52997
		1050	1000	10-52990	10-52991	10-52998	10-52999
		1250	1200	10-52992	10-52993	10-53000	10-53001
		1650	1600	10-52994	10-52995	10-53002	10-53003

Accessories



→
Safety accessories such as anchor bolts
and wall mounting sets on page 157

			Shelf width	1000 mm	1300 mm
Pos.	Description		For a shelving depth of	Ref. no.	Ref. no.
			mm		
A	Additional levels	double depth shelf levels, rear and front shelf inclined, with 2 shelves, galvanised	800	10-23548	10-23594
			1000	10-23549	10-23595
			1200	10-23550	10-14699
			1600	10-23551	10-23597

Kanban bin shelving for small parts

with bins, galvanised finish

Save space and time with the new BITO Kanban solution

■ Shelf load: 150 kg ■ Bay load: 1250 kg

■ Ideal for storing C-items


Ultra flat shelves are real space savers

Stores 25% more C-items and provides ergonomic access for order pickers

All bins are supplied with a slide-down window as standard feature. For optional extras such as product feeder panels, cross dividers, safety bars and dust covers refer to CTB bin accessories.

■ Shelves can be retro-fitted with a retaining lip at the rear





extension bay

1008 mm



starter bay

1058 mm



						Shelf width	1000 mm	
						Shelving type	Starter bay	Extension bay
Shelving height	Number of shelves	Description	External bay depth	Useable depth	Features	Bay load	Ref. no.	Ref. no.
mm			mm	mm		kg		
1850	10	single sided use	324	300	60 x CTB31514 (300 x 156 x 140 mm)	1250	10-53005	10-53008
			424	400	60 x CTB41514 (400 x 156 x 140 mm)		10-53006	10-53009
		double sided use	624	600	120 x CTB31514 (300 x 156 x 140 mm)		10-53007	10-53010

Kanban bin shelving for small parts

without bins, galvanised finish

More room for your bins — benefit from the flattest shelf on the market

■ Shelf load: 150 kg ■ Bay load: 1250 kg

Ultra flat BITO shelves with a height of only 25 mm provide more space for bins

■ Ideal for storing C-items

Ultra flat shelves are real space savers

Stores 25% more C-items and provides ergonomic access for order pickers

Shelves can be retro-fitted with a retaining lip at the rear

Fast and easy assembly without bolts saves time

Extensions possible at any time

■ Shelf levels adjustable in 25 mm increments




More accessories from page 154 Safety accessories such as anchor bolts and wall mounting sets on page 157



			Shelf width	1000 mm		
			Shelving type	Starter bay	Extension bay	
Shelving height	Number of shelves	External bay depth	Useable depth	Bay load	Ref. no.	Ref. no.
mm		mm	mm	kg		
1850	10	324	300	1250	10-53101	10-53104
		424	400		10-53102	10-53105
		624	600		10-53103	10-53106

Boltless shelving complete with RK bins

galvanised finish



Storage and handling bins RK

Large number of sizes to meet all needs

- Shelf load: 70 kg Bay load: 500 kg
- Shelving complete with RK bins
- Bin colour: dove blue
- Shelves can be retro-fitted with a retaining lip at the rear
- Assembly with beams and cross bracing
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
12	32 x RK3109 (300 x 117 x 90 mm) 16 x RK3209 (300 x 234 x 90 mm) 16 x RK3214 (300 x 234 x 140 mm)	1850 x 1000 x 324	10-53011	10-53012
	32 x RK4109 (400 x 117 x 90 mm) 16 x RK4209 (400 x 234 x 90 mm) 16 x RK4214 (400 x 234 x 140 mm)	1850 x 1000 x 424	10-53013	10-53014
	32 x RK5109 (500 x 117 x 90 mm) 16 x RK5209 (500 x 234 x 90 mm) 16 x RK5214 (500 x 234 x 140 mm)	1850 x 1000 x 524	10-53015	10-53016
	32 x RK6109 (600 x 117 x 90 mm) 16 x RK6209 (600 x 234 x 90 mm) 16 x RK6214 (600 x 234 x 140 mm)	1850 x 1000 x 624	12-21510	12-21511

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
10	40 x RK3214 (300 x 234 x 140 mm)	1850 x 1000 x 324	10-53017	10-53018
	40 x RK4214 (400 x 234 x 140 mm)	1850 x 1000 x 424	10-53019	10-53020
	40 x RK5214 (500 x 234 x 140 mm)	1850 x 1000 x 524	10-53021	10-53022
	40 x RK6214 (600 x 234 x 140 mm)	1850 x 1000 x 624	10-53023	10-53024

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
14	56 x RK3209 (300 x 234 x 90 mm)	1850 x 1000 x 324	10-53025	10-53026
	56 x RK4209 (400 x 234 x 90 mm)	1850 x 1000 x 424	10-53027	10-53028
	56 x RK5209 (500 x 234 x 90 mm)	1850 x 1000 x 524	10-53029	10-53030
	56 x RK6209 (600 x 234 x 90 mm)	1850 x 1000 x 624	10-53031	10-53032

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
14	112 x RK3109 (300 x 117 x 90 mm)	1850 x 1000 x 324	10-53033	10-53034
	112 x RK4109 (400 x 117 x 90 mm)	1850 x 1000 x 424	10-53035	10-53036
	112 x RK5109 (500 x 117 x 90 mm)	1850 x 1000 x 524	10-53037	10-53038
	112 x RK6109 (600 x 117 x 90 mm)	1850 x 1000 x 624	10-53039	10-53040

Accessories

Pos.	Description		For a shelf width of	Ref. no.
			mm	
A	Shelf ledges	for 25 mm high shelves, to be inserted between shelf and shelf clips, the edge prevents loads from slipping, galvanised	1000	10-52182



Storage and handling bins RK on page









Boltless shelving complete with SK bins

galvanised finish

i BITO info

Bin colours as illustrated. Other colours (blue, red, green, yellow) upon request!







Width of extension bay 1008 mm









Perfect combination

- Shelf load: 70 kg
- Bay load: 500 kg
- Shelving complete with SK bins
- Shelves can be retro-fitted with a retaining lip at the rear
- Assembly with beams and cross bracing
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments









With 40 storage bins SK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
10	40 x SK3521 (350 x 210 x 145 mm)	1850 x 900 x 324	10-53041	10-53042

With 32 storage bins SK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
8	16 x SK3521 (350 x 210 x 145 mm) 16 x SK3522 (350 x 210 x 200 mm)	1850 x 900 x 324	10-53043	10-53044

With 30 storage bins SK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
10	30 x SK5031 (500 x 315 x 145 mm)	1850 x 1000 x 524	10-53045	10-53046







With 28 storage bins SK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
7	28 x SK3522 (350 x 210 x 200 mm)	1850 x 900 x 324	10-53047	10-53048



With 21 storage bins SK

		Shelving type	Starter bay	Extension bay
Number of shelves	Features	Dimensions H x W x D	Ref. no.	Ref. no.
		mm		
7	21 x SK5032 (500 x 315 x 200 mm)	1850 x 1000 x 524	10-53049	10-53050



Accessories

Pos.	Description		For a shelf width of	Ref. no.
			mm	
A	Shelf ledges	for 25 mm high shelves, to be inserted between	900	10-52181
		shelf and shelf clips, the edge prevents loads from slipping, galvanised	1000	10-52182



Bin trolleys, with straight shelf levels

Shelving height	Number of shelves	External bay depth	Useable depth	Shelf width	Features	Ref. no.
mm		mm	mm	mm		
1815	7	533	500	1000	18 x SK5032 (500 x 315 x 200 mm)	10-15721
					without bins	10-15720








Hose shelving

galvanised finish

Everything within easy reach!

■ Shelf load: 100 kg Bay load: 500 kg

- Neat storage of suction and pressure hoses
- Neat storage of suction and pressure hoses of any length
- Trapeze-shaped shelves with integral discharge trough provide non-slip, dry and easily accessible storage space
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Neat storage of suction and pressure hoses of any length





1058 mm 1008 i	mm		Shelf width	1000 mm	
			Shelving type	Starter bay	Extension bay
Shelving height	Number of shelves	External bay depth	Useable depth	Ref. no.	Ref. no.
mm		mm	mm		
2200	3	524	500	17-53051	17-53053
2500	4	524	500	17-53052	17-53054

Hose shelving

Bin trolleys, galvanised finish

■ Shelf load: 100 kg Bay load: 500 kg

- Facilitates transport of hoses to and from emergency vehicles
- The ergonomically designed push handle and easy-to-move fixed and swivel castors provide excellent mobility
- Trapeze-shaped shelves with integral discharge trough provide non-slip, dry and easily accessible storage space
- Levels adjust in height on a 25 mm pitch



Shelving height	External bay width	External bay depth	Number of levels	Castor Ø	Surface finish	Ref. no.
mm	mm	mm		mm		
1815	1068	524	3	125	galvanised	17-13091

Accessories



A	Additional hose levels

Pos.	Description		For a shelf width of	For a shelving depth of	Ref. no.
			mm	mm	
A	Additional hose levels	single depth shelf levels, suited for hose shelving and hose carts	1000	500	17-8246

ng and hose carts	1000	500	17-8246

page 157

Safety accessories such as anchor bolts and wall mounting sets on

Cabinets for fire fighting equipment

Neat and tidy storage allows easy access to items!

- On solid superior quality plastic feet for optimum corrosion resistance, feet height 150 mm
- Height adjustable feet included as standard
- Compartment width 400 mm
- Supplied with fold-down helmet support on roof top (supplied unmounted, easy on-site fitting)
- Locker compartment with drop-in slot secured by a cylinder lock
- Open compartments underneath with grid shelf, garment rail with 3 push-along hooks per compartment
- Rail with captive hook for straps, cords, etc.
- Cabinet base with slot for broom cleaning, epoxycoated finish
- Other colours upon request. (Supports for helmets are always in black RAL 9005.)





Height	Width	Depth	Number of compartments	Colour	Ref. no.
mm	mm	mm			
2000	420	500	1	RAL 3000 Flame red	17-21380
	810	500	2	RAL 3000 Flame red	17-21381
	1200	500	3	RAL 3000 Flame red	17-21382
	1590	500	4	RAL 3000 Flame red	17-21383


Boltless shelving with wire baskets - wire baskets


galvanised finish

Neat and easy-to-view product presentation

■ Shelf load: 100 kg Bay load: 800 kg

- Ideal for storing sewer pipes, heating pipes, lightweight bulk materials and goods that are difficult to stack
- Wire basket 35 kg
- Supplied with solid base shelf
- Assembly with beams and cross bracing
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments



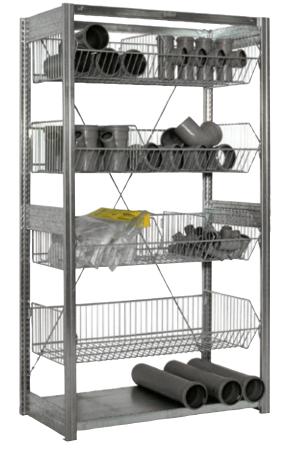

			Width of wire baskets	1000 mm	
			Shelving type	Starter bay	Extension bay
Shelving height	Number of levels	External bay depth	Useable depth	Ref. no.	Ref. no.
mm		mm	mm		
1850	4	524	500	10-53055	10-53057
2200	5	524	500	10-53056	10-53058

Accessories









Safety accessories such as anchor bolts and wall mounting

sets on page 157

Wire dividers

A Shelves, 40 mm high

B Wire baskets

Pos.	Description		Load capacity	For a shelf width of	For a shelving depth of	Ref. no.
			kg	mm	mm	
A	Shelves, 40 mm high	convenient drop-in fitting on upper stiffening beams	100	1000	500	10-16934
B	Wire baskets	height 240 mm, mesh rods with 30 mm spacing, supplied with 4 shelf clips, load capacity per wire basket 35 kg	35	1000	500	10-13052
C	Wire dividers	galvanised, optimum subdivision of wire baskets to suit your products, height 210 mm	-	-	500	10-11682

Shelving with wire shelves - wire shelves

galvanised finish

Attractive, easy to clean, immediate product overview

■ Shelf load: 100 kg ■ Bay load: 800 kg


Wire-mesh shelves allow water, air and light to pass through

Assembly with beams and cross bracing

Fast and easy assembly without bolts saves time

Extensions possible at any time

Shelf levels adjustable in 25 mm increments






			Width of wire shelves	1000 mm		1300 mm	
			Shelving type	Starter bay	Extension bay	Starter bay	Extension bay
Shelving height	Number of levels	External bay depth	Useable depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm		mm	mm				
2000	5	524	500	10-53059	10-53061	10-54891	10-54893
2500	6	524	500	10-53060	10-53062	10-54892	10-54894

Accessories







Pos.	os. Description		For a shelf width of	For a shelving depth of	Ref. no.
			mm	mm	
A	Wire shelves	shelf height 25 mm, mesh rods with 30 mm spacing, supplied with 4 shelf	1000	500	10-16489
	clips, load capacity per wire shelf 100 kg	1300	500	10-54890	

Corner shelving

galvanised finish

Corner shelving fits in everywhere!

■ Shelf load: 100 kg

Bay load: 1000 kg - 1400 kg

Ideal for creating more storage space in the corners of

your premises

Assembly with beams and cross bracing

Fast and easy assembly without bolts saves time

Extensions possible at any time

Shelf levels adjustable in 25 mm increments





Safety accessories such as anchor bolts and wall mounting sets on page 157

Shelving height	Number of shelves	External bay depth	Useable depth	Top view L x W	Ref. no.
mm		mm	mm	mm	
2000	10	324	300	1060 x 1354	10-53063
		424	400	1060 x 1454	10-53064
		524	500	1060 x 1554	10-53065
		624	600	1060 x 1654	10-53066
2500	12	324	300	1060 x 1354	10-53067
		424	400	1060 x 1454	10-53068
		524	500	1060 x 1554	10-53069
		624	600	1060 x 1654	10-53070

Accessories



A Light duty shelving type L - shelf load 100 kg

Pos.	Description		Shelving height	For a shelving depth of	Shelf width
			mm	mm	mm
A	Extension bay	galvanised	2000	300	1000
				400	1000
				500	1000
				600	1000
			2500	300	1000
				400	1000
				500	1000
				600	1000

Tyre shelving

galvanised finish

Proper and space-saving tyre storage

■ Shelf load: 150 - 250 kg

Bay load: 800 kg Ideal for tyre storage

Suitable for tyre diameters from 578 to 624 mm

Assembly with beams, without cross bracing

Fast and easy assembly without bolts saves time

Extensions possible at any time



Width of starter bay 1058 mm 1358 mm

1558 mm

Width of extension bay 1008 mm 1308 mm 1508 mm



				Shelving type	Starter bay	Extension bay
Shelf load	Bay width	Shelving height	Number of levels	External bay depth	Ref. no.	Ref. no.
kg	mm	mm		mm		
150	1300 mm	1850	3	424	10-53071	10-53072
		2500	4	424	10-53073	10-53074
		3000	5	424	10-53075	10-53076
	1500 mm	1850	3	424	10-53077	10-53078
		2500	4	424	10-53079	10-53080
		3000	5	424	10-53081	10-53082
250	1000 mm	1850	3	424	10-53083	10-53084
		2500	4	424	10-53085	10-53086
		3000	5	424	10-53087	10-53088

Tyre shelving

Bin trolleys

Proper and space-saving tyre storage

■ Shelf load: 150 kg Bay load: 300 kg Ideal for tyre storage

Suitable for tyre diameters from 578 to 624 mm


The ergonomically designed push handle and easy-to-move fixed and swivel castors provide excellent mobility

■ 2 storage levels complete with special profile beams designed for gentle storage and in-house transport of tyres and rims



Shelving height	Shelf width	Number of shelves	External bay depth	Useable depth	Ref. no.
mm	mm		mm	mm	
1625	1300	2	682	424	10-40200

Accessories



Pos.	Description		For a shelf width of	For a shelving depth of	Ref. no.
			mm	mm	
A	Shelves, 40 mm high	set includes 4 shelf clips, shelf height 40 mm, with shelf	1000	400	10-17065
		perforations for dividers, supplied with 4 shelf clips	1300	400	10-17070
В	Tyre beams	space-saving storage of tyres and rims, incl. safety pins,	1000	400	10-7709
	galvanised		1300	400	10-28540
			1500	400	10-7708





Accessories for boltless shelving

Neat product presentation in office and workshop environments

With ease of assembly, superior workmanship and a broad range of accessories, BITO shelving gets top marks from our customers. Added benefits such as anytime extension, reconfiguration and retro-fitting make BITO boltless shelving a real winner!




Shelving components

- 1 Frames
- 2 Stiffening beam
- Cross bracing
- 4 Shelves (with shelf clips)

Shelving rows:

- with stiffening beams = 1 cross bracing set for every fifth bay, maximum bay load capacity 1600 kg
- b without stiffening beams = 1 cross bracing set for every second bay, maximum bay load capacity 800 kg

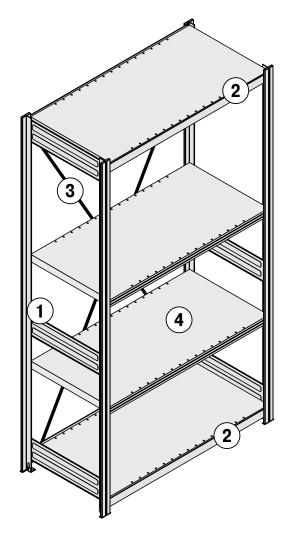



Frames

Our accessories fit any application

■ Modular system, add-ons possible whenever required

Frames for boltless shelving, unassembled

- Supplied with 2 uprights, 3 to 5 upright connectors, 2 base plates
- All components galvanised

Height	1850 mm	2000 mm	2200 mm	2500 mm	3000 mm
External bay depth	Ref. no.				
mm					
324	10-15065	10-13635	10-15081	10-13639	10-15097
424	10-15066	10-13636	10-15082	10-13640	10-15098
524	10-15067	10-13637	10-15083	10-13641	10-15099
624	10-15068	10-13638	10-15084	10-13642	10-15100
824	10-15069	10-15070	10-15085	10-15086	10-15101

Frames for boltless shelving, unassembled

RAL 5010

- Supplied with 2 uprights, 3 to 5 upright connectors, 2 base plates
- Uprights are epoxy-coated in gentian blue, RAL 5010, all other components are galvanised

Height	1850 mm	2000 mm	2200 mm	2500 mm	3000 mm
External bay depth	Ref. no.				
mm					
324	10-45320	10-45325	10-45330	10-45335	10-45340
424	10-45321	10-45326	10-45331	10-45336	10-45341
524	10-45322	10-45327	10-45332	10-45337	10-45342
624	10-45323	10-45328	10-45333	10-45338	10-45343
824	10-45324	10-45329	10-45334	10-45339	10-45344

Frames for boltless shelving, unassembled

RAL 7035

- Supplied with 2 uprights, 3 to 5 upright connectors, 2 base plates
- Uprights epoxy-coated in light grey, RAL 7035, all other components galvanised

Height	1850 mm	2000 mm	2200 mm	2500 mm	3000 mm
External bay depth	Ref. no.				
mm					
324	10-45345	10-45350	10-45355	10-45360	10-45365
424	10-45346	10-45351	10-45356	10-45361	10-45366
524	10-45347	10-45352	10-45357	10-45362	10-45367
624	10-45348	10-45353	10-45358	10-45363	10-45368
824	10-45349	10-45354	10-45359	10-45364	10-45369





Frames for boltless shelving, unassembled

RAL 3000

- Supplied with 2 uprights, 3 to 5 upright connectors, 2 base plates
- Uprights epoxy-coated in flame red, RAL 3000, all other components galvanised

Height	1850 mm	2000 mm	2200 mm	2500 mm	3000 mm
External bay depth	Ref. no.				
mm					
324	10-45370	10-45375	10-45380	10-45385	10-45390
424	10-45371	10-45376	10-45381	10-45386	10-45391
524	10-45372	10-45377	10-45382	10-45387	10-45392
624	10-45373	10-45378	10-45383	10-45388	10-45393
824	10-45374	10-45379	10-45384	10-45389	10-45394

Frames for boltless shelving, supplied assembled

- Supplied with 2 uprights, 3 to 5 upright connectors, 2 base plates
- All components galvanised
- Please note: Extended delivery time

Height	1850 mm	2000 mm	2200 mm	2500 mm	3000 mm
External bay depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm					
324	10-C1200-0201	10-15000	10-15015	10-15004	10-15010
424	10-C1200-0202	10-15001	10-15016	10-15005	10-15011
524	10-C1200-0203	10-15002	10-15017	10-15006	10-15012
624	10-C1200-0206	10-15003	10-15018	10-15007	10-15013
824	10-C1200-0204	10-15008	10-15019	10-15009	10-15014

Accessories



Cross bracing


- Consisting of 2 struts and 2 turnbuckles
- Shelving runs with stiffening beams require 1 cross bracing kit for every 5 bays, shelving runs without stiffening beams require 1 cross bracing kit for every 2 bays
- Galvanised

For a shelf width of	Ref. no.
mm	
750	10-26870
1000/1300	10-7713



Safety accessories such as anchor bolts and wall mounting sets on page 157

Shelving for industry requirements - accessories



Side cladding, solid steel sheet panel

- Consisting of 2 to 3 segments depending on frame height, supplied with fixing clips
- Frame not included. Please order unassembled frames separately!

Height	2000 mm	2200 mm	2500 mm	3000 mm
External bay depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm				
324	10-13620	10-19054	10-13625	10-13630
424	10-13621	10-19055	10-13626	10-13631
524	10-13622	10-19056	10-13627	10-13632
624	10-13623	10-19057	10-13628	10-13633
824	10-13624	10-19058	10-13629	10-13634

Side cladding, wire-mesh panels

- Mesh width 50 x 50 mm, incl. fixing clips
- Frame not included. Please order unassembled frames separately!

Height	2000 mm	2200 mm	2500 mm	3000 mm
External bay depth	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm				
324	10-12299	10-14366	10-12304	10-12309
424	10-12300	10-14367	10-12305	10-12310
524	10-12301	10-14368	10-12306	10-12311
624	10-12302	10-14369	10-12307	10-12312
824	10-12303	10-14370	10-12308	10-12313

Shims, galvanised

For compensating floor unevenness

Description	Worktop thickness	Pcs/pack	Ref. no.
	mm		
suited for shelving	1	20	10-12215
galvanised	3	20	10-12216

Wall fixing brackets, for frames

- Used to fix shelving units to the wall, spacing can be adjusted without increments up to 200 mm
- Delivery includes fixing material

Description	Ref. r	0.
galvanised	10-175	47

Anchor bolts, for frames

No additional anchor bolts required

Material	Pcs/ pack	Ref. no.
steel	10	41-15871









i BITO info

Shelving & racking must be sufficiently secured against tip-overs if:

- the height of the top shelf in relation to the shelving depth is greater than 5:1
- shelving is equipped with hinged doors with a height/depth ratio greater than 4:1
- shelving is equipped with pull-out elements (e.g. drawers) and in the case of shelving with ladders

SHELVING /

Louvered panels

designed to fit your shelving

- Easy-to-mount, hardwearing steel sheet panels
- Accept storage bins SK1095, SK1610 and SK2311







Fitted to shelving sides

For a shelving depth of	Height	Ref. no.
mm	mm	
300	1000	8-31329
400	1000	8-31330
500	500	8-31333
	1000	8-31331
600	1000	8-31332
Fixing material	pan head rivets, please order 6/12 pcs. per louvered panel (500 mm/1000 mm high) to fix panel to shelving	41-28460

Fitted to shelving back



For a shelf width of	Height	Ref. no.
mm	mm	
1000	500	8-31326
	1000	8-31327
1300	1000	8-31328
Fixing material	spring clips, please order 6/12 pcs. per louvered panel (500 mm/1000 mm high) to fix panel to shelving	10-12290



Back cladding

galvanised finish

Back cladding, solid steel sheet panel

- 2 or 3 segments required depending on frame height
- Can also be used as partition in back-to-back shelving
- Supplied with fixing clips
- Galvanised


Height	2000 mm	2200 mm	2500 mm	3000 mm
Width	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm				
750	10-29260	10-29261	10-29262	10-29263
1000	10-17162	10-14261	10-17163	10-17164
1300	10-17165	10-14262	10-17166	10-17167



Back cladding, wire-mesh panels

- Can also be used as partition in back-to-back shelving
- Grid infill 50 x 50 mm
- Supplied with fixing clips
- Galvanised

Height	1950 mm	2150 mm	2450 mm	2950 mm
Width	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm				
1000	10-17168	10-14396	10-17169	10-17170



Shelf clips, galvanised finish, height 40 mm and 25 mm

- 4 shelf clips required per shelf
- Shelf levels adjustable in 25 mm increments

Description	Pcs/pack	Ref. no.
Shelf clips	4	10-3798































































































































40 mm high

- Shelf height 40 mm
- With shelf perforations for dividers

		load capacity	100 kg	200 kg	300 kg
Colour	For a shelving depth of	For a shelf width of	Ref. no.	Ref. no.	Ref. no.
	mm	mm			
galvanised	300	750		10-26840	
		1000	10-17064	10-17074	
		1300	10-17069	10-17079	
	400	750		10-26841	
		1000	10-17065	10-17075	10-17584
		1300	10-17070	10-17080	
	500	750		10-26842	
		1000	10-16963	10-17076	10-17585
		1300	10-17071	10-17081	
	600	750		10-26843	
		1000	10-17066	10-17077	10-17586
		1300	10-17072	10-17082	
	800	750		10-26683	
		1000		10-17078	
		1300		10-17083	

25 mm high

- Shelf height 25 mm
- With shelf perforations for dividers
- Supplied with 4 shelf clips
- Ultra flat shelves help you make the most of your storage space

Colour	For a shelving depth of	For a shelf width of	Load capacity	Ref. no.
	mm	mm	kg	
galvanised	300	750	70	10-C1165-0036
		1000	70	10-C1165-0006
		1000	150	10-C1165-0008
	400	1000	70	10-C1165-0009
		1000	150	10-C1165-0011
	500	1000	70	10-C1165-0012
		1000	150	10-C1165-0014
	600	1000	70	10-C1165-0015
		1000	150	10-C1165-0017
RAL 7035 Light grey	300	750	70	10-C1165-0077
		1000	70	10-C1165-0078

Prevents products from falling off shelves

- To be inserted between shelf and shelf clips The edge prevents loads from slipping
- Galvanised

Description	For a shelf width of	Ref. no.	
	mm		
for 25 mm high shelves	750	10-52180	
	900	10-52181	
	1000	10-52182	
	1300	10-52183	
for 40 mm high shelves	1000	10-6568	
	1300	10-9831	

Shelving for industry requirements - accessories



Wire shelves GRID

- Allow water to pass through essential for sprinkler environments/for compliance with fire prevention regulations
- Lower fire insurance premium
- Rectangular slotting
- Compatible with BITO standard boltless shelving of all types
- With shelf perforations on a 50 mm pitch to slot in dividers
- Load capacity 100 kg
- Shelf height 40 mm
- Supplied with 4 shelf clips




Permeability > 50%

In compliance with safety standard VdS CEA4001 which stipulates that shelves in sprinkler environments must allow at least 50% of the water to pass through

Colour	Load capacity	For a shelf width of	For a shelving depth of	Ref. no.
	kg	mm	mm	
galvanised	100	1000	400	10-37914
		500	10-37915	
		600	10-37916	
			800	10-37917
		1300	400	10-37919
		500	500	10-37920
			600	10-37921
			800	10-37922

Permeability 44-50%

Shelves in the dimensions listed below have a water permeability of up to 49%

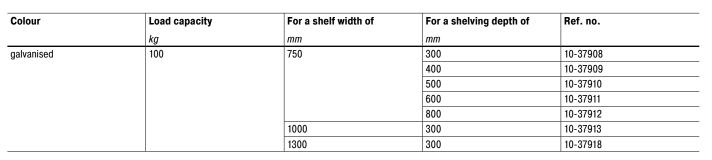







Stiffening beams

- Hooked into the slotting pattern of the uprights, safety pins provide protection against unintentional lifting
- Incl. safety pins
- Suited for shelves with a load capacity of 100 kg, 200 kg and 300 kg
- All components galvanised, epoxy coating in RAL colours on request

For a shelf width of	Height	Ref. no.	
mm	mm		
750	40	10-26846	
1000	40	10-7706	
1300	40	10-7711	



Universal beams

- Special profile bending to allow drop-on fitting of chipboard and wire shelves
- Incl. safety pins
- Galvanised

For a shelf width of	Useable interior length	Ref. no.
mm	mm	
1000	996	10-7707
1300	1296	28-9824



Tyre beams

- Space-saving storage of tyres and rims
- Incl. safety pins
- Galvanised

For a shelf width of	Useable interior length	Load cap. per pair of beams	Ref. no.
mm	mm	kg	
1000	958	250	10-7709
1300	1258	150	10-28540
1500	1458	150	10-7708

EVING

Shelving for industry requirements - accessories

Shelf dividers

Our accessories fit any application

- Stand-alone
- Subdivide storage levels into several compartments
- Immediate stock identification even if several references are stocked on the same level

Full sheet dividers, slot-in fitting, for 40 mm high shelves

- Convenient slot-in fitting into shelf perforations
- Galvanised

Height	100 mm	200 mm	300 mm
For a shelving depth of	Ref. no.	Ref. no.	Ref. no.
mm			
300	10-44690	10-44691	10-44692
400	10-44693	10-44694	10-44695
500	10-44696	10-44697	10-44698
600	10-44699	10-44700	10-44701
800	10-44702	10-44703	10-44704



Shelf dividers, slot-in fitting, for 25 mm high shelves

- Convenient slot-in fitting into shelf perforations
- Galvanised

Height	100 mm	200 mm	300 mm
For a shelving depth of	Ref. no.	Ref. no.	Ref. no.
mm			
300	10-52213	10-52214	10-52215
400	10-52216	10-52217	10-52218
500	10-52219	10-52220	10-52221
600	10-52222	10-52223	10-52224
800	10-52225	10-52226	10-52227



Shelf dividers, with label holder

- Plastic dividers, height 150 mm
- Easy subdivision of any shelf, whether fitted with shelf clips or beams
- Can be positioned anywhere along the shelf length
- Convenient subdivision since dividers slide easily back and forth along the shelf length
- Partitions in yellow are easy to recognize

Height	For a shelving depth of	Product type	Pcs/pack	Ref. no.
mm	mm			
150	300	FT275	20	10-51009
	400	FT375	20	10-51008
	500	FT475	20	10-51007
	600	FT575	20	10-51006
Label sheets	pre-perforated blank label sheets, ready for direct printing, suited for laser and inkjet printers, on white DIN A4 sheets, 140 g/m², 25 sheets per pack, colour white		25	46-20767



Bin shelves for loose goods





Bin shelves for loose goods

- Back and side panels 200 mm high, front panel 100 mm high
- Can also be combined with sheet metal dividers (height 200 mm)
- Galvanised

for a shelf width of	1000 mm	1300 mm
External bay depth	Ref. no.	Ref. no.
mm		
324	10-14381	10-14386
424	10-14382	10-14387
524	10-14383	10-14388
624	10-14384	10-14389
824	10-14385	10-14390

Vertical storage



Support rails for divider bars

- Can be fitted without bolts, for vertical storage of light-weight goods
- Galvanised
- Please order divider bars separately!

For a shelf width of	Ref. no.
mm	
1000	10-15053
1300	10-15054



Divider bars for long goods

- Push-on fitting onto beam to allow vertical storage of long loads
- Galvanised

Length	Ref. no.
mm	
400	10-15052

Shelving for industry requirements - accessories

Wire-mesh partitions

Wire shelves

- Shelf height 25 mm
- Mesh rods with 30 mm spacing
- Supplied with 4 shelf clips
- Load capacity per wire shelf 100 kg

For a shelving depth of	For a shelf width of	Surface finish	Ref. no.
mm	mm		
500	1000	galvanised	10-16489
	1300	galvanised	10-54890





Wire baskets

- Height 240 mm
- Mesh rods with 30 mm spacing
- Supplied with 4 shelf clips
- Load capacity per wire basket 35 kg


For a shelving depth of	For a shelf width of	Surface finish	Ref. no.
mm	mm		
500	1000	galvanised	10-13052



Wire dividers, for wire baskets

- Galvanised
- Optimum subdivision of wire baskets to suit your products
- Height 210 mm

For a shelving depth of	Surface finish	Ref. no.
500	galvanised	10-11682



Tray shelves

- Safe storage of receptacles with spill potential such as open paint cans etc.
- Shelves retain spillage
- Height 60 mm
- Supplied with 4 shelf clips
- Shelf load capacity 200 kg

For a shelving depth of	For a shelf width of	Surface finish	Ref. no.
mm	mm		
500	1000	galvanised	10-12937

























































Garment hanging kits

- Delivery includes 2 side supports, 4 shelf clips and a chromed hanging rail (oval 30/15 mm)

for a shelf width of	1000 mm		1300 mm	1300 mm	
External bay depth	Load capacity	Ref. no.	Load capacity	Ref. no.	
mm	kg		kg		
424	50	10-12353	20	10-12359	
524	50	10-12354	20	10-12360	
624	50	10-12356	20	10-12361	

Suspension file kits

- Suitable for the Leitz system, supplied with of 1 pair of side supports, 1 hanging rail
- ZIPPEL system upon request
- Galvanised

For a shelf width of	For a shelving depth of	Ref. no.		
mm	mm			
1000	400	10-12291		

Upright caps

- Prevent injuries in the case of low-built uprights and enhance appearance
- 1 pair required per frame

Material	Colour	Pcs/pack	Ref. no.
PP	black	2	10-16050

Connectors for back-to-back shelving, galvanised

Connect adjoining uprights of back-to-back shelving

Description	
galvanised	10-17535

Foot plinths, galvanised

To be clipped into stiffening beam to cover the distance between bottom shelf and floor. (**Please note**: the foot plinth can only be used in combination with a stiffening beam.)

Height	For a shelf width of	Ref. no.
mm	mm	
75	1000	10-6625
	1300	10-6624

Shelf ledges

- To be inserted between shelf and shelf clips
- The edge prevents loads from slipping
- Galvanised

Description	For a shelf width of	Ref. no.	
	mm		
for 25 mm high shelves	750	10-52180	
	900	10-52181	
	1000	10-52182	
	1300	10-52183	
for 40 mm high shelves	1000	10-6568	
	1300	10-9831	

Shelving for industry requirements - accessories



Hinged doors

- Can be retro-fitted
- All components epoxy-coated in light grey, RAL 7035
- Supplied with 2 or 3 door pivots
- Double door with flush fitting turn handle, safety lock and 2 keys (3-point locking mechanism)
- Suited for all types of boltless shelving



Hinged doors, width 1000 mm

Hinged doors, width 1300 mm

Configuration	Unit height	Ref. no.	Configuration	Unit height	Ref. no.
Comiguration		nei. iio.	Comiguration		nei. iio.
	mm			mm	
500	575	10-29954	500	575	10-29955
1000	1075	10-29952	1809	1075	10-29953
2000	2000	10-29950	2000	2000	10-29951
- 50C	2000 + 500	10-29956	2000	2000 + 500	10-29957
1000	2000 + 1000	10-29958	4 1000 4 2000		10-29959
2000			2000		

Retrofit drawers





- All components epoxy-coated in light grey, RAL 7035
- 2 drawer sides with glide runners for full drawer extraction
- Drawer load capacity 60 kg
- Optional locking mechanism
- Optional trough insert
- Suited for bays sized 1000 x 500 mm
- Delivery includes drawer(s) (without shelving)

Individual drawers

- Supplied with 1 steel sheet drawer with full width hand grip on drawer front
- Without lock



For a shelving depth of	Height	Ref. no.
mm	mm	
524	100	10-15519
	150	10-15518
	200	10-15517

Drawer blocks with 3 drawers



- 2 drawers with a front height of 100 mm, inside dimensions 875 x 425 x 70 mm
- 1 drawer with a front height of 200 mm, inside dimensions 875 x 425 x 170 mm
- Without central locking

For a shelving depth of	Height	Ref. no.
_mm	mm	
524	450	10-15116



Drawer blocks with 7 drawers

- Supplied with 7 steel sheet drawers with full width hand grip on drawer front, height of drawer unit 1050 mm
- 3 drawers with a front height of 100 mm, inside dimensions 875 x 425 x 70 mm
- 2 drawers with a front height of 150 mm, inside dimensions 875 x 425 x 120 mm
- 2 drawers with a front height of 200 mm, inside dimensions 875 x 425 x 170 mm
- Without central locking

For a shelving depth of	Height	Ref. no.
mm	mm	
524	1050	10-15516



Shelving for industry requirements - accessories



Trough inserts

■ Supplied with 6 troughs, width 145 mm and 12 adjustable dividers

Trough height	Description	Surface finish	Ref. no.
mm			
50	front height 100 mm	galvanised	10-15526
100	front height 150 mm	galvanised	10-15525
150	front height 200 mm	galvanised	10-15524



Locking options

■ 1 top shelf with cylinder lock, 2 keys and connecting rods

Ref. no.
10-15523
10-15117
10-15527





Stainless steel shelving

components from top quality V2A stainless steel

For all environments where hygiene is a must!

■ Shelf load: 200 kg ■ Bay load: 1200 kg

- Sturdy, hygienic and easy to clean: ideal for use in the food industry and the health sector
- Assembly without beams, with cross bracing
- All components made from high quality stainless steel V2A (material 4301)
- Resistant to heat, cold and many chemicals
- Also available with shelves with ventilation slots
- Fast and easy assembly without bolts saves time
- Extensions possible at any time
- Shelf levels adjustable in 25 mm increments



				Shelving type	Starter bay	Extension bay
Shelving height	Number of shelves	Features	External bay depth	Shelf width	Ref. no.	Ref. no.
mm			mm	mm		
1750	4	slotted shelves	300	1000 mm	49-52900	49-52915
			400	1000 mm	49-52901	49-52916
			500	1000 mm	49-52902	49-52917
			600	1000 mm	49-52903	49-52918
			800	1000 mm	49-52904	49-52919
		solid shelves	300	1000 mm	49-52870	49-52885
			400	1000 mm	49-52871	49-52886
			500	1000 mm	49-52872	49-52887
			600	1000 mm	49-52873	49-52888
			800	1000 mm	49-52874	49-52889
2000	5	slotted shelves	300	1000 mm	49-52905	49-52920
			400	1000 mm	49-52906	49-52921
			500	1000 mm	49-52907	49-52922
			600	1000 mm	49-52908	49-52923
			800	1000 mm	49-52909	49-52924
		solid shelves	300	1000 mm	49-52875	49-52890
			400	1000 mm	49-52876	49-52891
			500	1000 mm	49-52877	49-52892
			600	1000 mm	49-52878	49-52893
			800	1000 mm	49-52879	49-52894
2500	6	slotted shelves	300	1000 mm	49-52910	49-52925
			400	1000 mm	49-52911	49-52926
			500	1000 mm	49-52912	49-52927
			600	1000 mm	49-52913	49-52928
			800	1000 mm	49-52914	49-52929
		solid shelves	300	1000 mm	49-52880	49-52895
			400	1000 mm	49-52881	49-52896
			500	1000 mm	49-52882	49-52897
			600	1000 mm	49-52883	49-52898
			800	1000 mm	49-52884	49-52899

Stainless steel shelving





Accessories



Pos. Description			For a shelf width of	For a shelving depth of	Ref. no.
			mm	mm	
A	Shelves	vented shelves	1000	300	49-52935
		closed shelves	1000		49-52930
		vented shelves	1000	400	49-52936
		closed shelves	1000		49-52931
		vented shelves	1000	500	49-52937
		closed shelves	1000		49-52932
		vented shelves	1000	600	49-52938
		closed shelves	1000		49-52933
		vented shelves	1000	800	49-52939
		closed shelves	1000		49-52934
B	Wall fixing brackets	used to fix shelving units to the wall, spacing can be adjusted without increments up to 200 mm, delivery includes fixing material	-	-	49-52940

Wide span shelving

Wide spans for a wide range of items!

Are you handling goods with an awkward shape or heavier items that do not fit into standard shelving? We have a solution to meet your needs: BITO wide span shelving is the perfect option from our bolt-free shelving range for an amazingly wide spectrum of storage goods. To widen your storage options, our range now includes 1100 mm deep levels with a maximum load capacity of 700 kg. Various level decking options cater for all requirements.

Please note: This racking system has been designed for in-door use only. The indicated load capacities are not valid for earthquake hazard zones. If your storage and order picking facility is intended for use in a seismic hazard zone, please inform BITO in advance!

i BITO info

All shelving and racking components fully comply with the latest health and safety regulations.

Please note: Wide span shelving is not designed for fork lift truck servicina









The shelving system of your choice for bulky and large items




High grade chipboard decking

- Low cost option
- Max. load per level 550 kg
- 22 mm chipboard panel, quality V20E1
- Complete with galvanised support bars
- Chipboard panels sit flush with the upper edge of the stepped beams to protect panel edges from damage



High grade mesh decking

- Allows instant product identification for order pickers and lets light and water through
- Max. load per level 550 kg
- Galvanised wire-mesh segments sized 50 x 50 mm
- Complete with galvanised support bars




High grade steel panel decking

- Top quality
- Max. load per level 700 kg
- Steel panels are galvanised
- Drop-in steel panels sit flush with the upper edge of the stepped beams to protect panel edges from damage



Frames accept high loads - max. bay load capacity 6200 kg

- Galvanised frames
- Galvanised base plates
- Upright width 60 mm

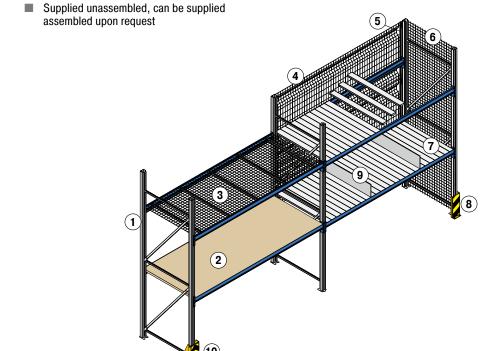



Beams: easy assembly - sturdy connection

- Height adjustable in 50 mm increments
- Epoxy-coated in gentian blue RAL 5010



Vast range of accessories for unsurpassed adaptability!

- Column guards and upright protectors prevent uprights from getting damaged due to negligent fork lift truck manoeuvring
- Wire-mesh back and side cladding keeps items from falling on aisles and walkways
- Dividers for steel panel decking allow fast subdivision of shelving levels
- Uprights are firmly anchored to the floor with anchor bolts
- 1 Frame
- Chipboard shelf
- Wire-mesh decking
- 4 Wire-mesh back cladding
- Bracket for back cladding
- 6 Wire-mesh side cladding
- Steel panel decking
- 8 Column guard L-shaped
- Dividers for steel panel decking
- 10 Column guard U-shaped





Wide span shelving

with chipboard decking

Ideal for storing and picking unpalletised goods. Top quality at an excellent price!

- Shelf load: max. 550 kg
- Bay load: max. 3900 kg
- Beams are epoxy-coated in gentian blue RAL 5010, step height 23 mm
- Chipboard panels are 22 mm thick, quality
- Frames are supplied unassembled, galvanised finish
- **UDL** assumed for all load capacities



H x W x D: 2000 x 5580 x 600 mm

Ref. no. 19-44225



Width of starter bay 1470 mm 1920 mm 2320 mm 2820 mm

Width of extension bay 1410 mm 1860 mm 2260 mm 2760 mm



TOP SELLER

19-44225

More frames, level decking options and accessories from page 176

i BITO info

Assembly service

For your convenience, each delivery comes with instructions for assembly and use for quick and easy installation. All assembly steps and directions of use are illustrated in detail. Upon request we are pleased to submit an offer for on-site installation by our experienced assembly teams.

Please note: Wide span shelving is not designed for fork lift truck servicing

					Shelving type	Starter bay	Extension bay
Shelving height	Bay width	External bay depth	Number of levels	Shelf load	Bay load	Ref. no.	Ref. no.
mm	mm	mm		kg	kg		
2000	1350	600	3	400	1200	19-25749	19-25751
		800	3	400	1200	19-25757	19-25759
		1100	3	400	1200	19-25765	19-25767
	1800	600	3	500	1500	19-44219	19-44222
		800	3	500	1500	19-44220	19-44223
		1100	3	500	1500	19-44221	19-44224
	2200	600	3	550	1650	19-44201	19-44204
		800	3	550	1650	19-44202	19-44205
		1100	3	550	1650	19-44203	19-44206
	2700	600	3	500	1500	19-25753	19-25755
		800	3	500	1500	19-25761	19-25763
		1100	3	500	1500	19-25769	19-25771
2500	1350	600	4	400	1600	19-25773	19-25775
		800	4	400	1600	19-25781	19-25783
		1100	4	400	1600	19-25789	19-25791
	1800	600	4	550	2200	19-44213	19-44216
		800	4	550	2200	19-44214	19-44217
		1100	4	550	2200	19-44215	19-44218
	2200	600	4	550	2200	19-44207	19-44210
		800	4	550	2200	19-44208	19-44211
		1100	4	550	2200	19-44209	19-44212
	2700	600	4	500	2000	19-25777	19-25779
		800	4	500	2000	19-25785	19-25787
		1100	4	500	2000	19-25793	19-25795



Wide span shelving

with drop-in steel panel decking

Ideal for storing and picking unpalletised goods. High quality level decking!

■ Shelf load: max. 700 kg■ Bay load: max. 6200 kg

Beams are epoxy-coated in gentian blue RAL 5010, step height 23 mm

- Flat surfaced, galvanised steel panels allow convenient and effortless order picking
- Frames are supplied unassembled, galvanised
- UDL assumed for all load capacities





Width of starter bay extension bay 1470 mm 1410 mm 1920 mm 1860 mm 2320 mm 2260 mm



More frames, level decking options and accessories from page 176

i BITO info

Assembly service

For your convenience, each delivery comes with instructions for assembly and use for quick and easy installation. All assembly steps and directions of use are illustrated in detail. Upon request we are pleased to submit an offer for on-site installation by our experienced assembly teams.


Ref. no. 19-44200

Please note: Wide span shelving is not designed for fork lift truck servicing

					Shelving type	Starter bay	Extension bay
Shelving height	Bay width	External bay depth	Number of levels	Shelf load	Bay load	Ref. no.	Ref. no.
mm	mm	mm		kg	kg		
2000	1350	600	3	400	1200	19-25797	19-25799
		800	3	400	1200	19-25813	19-25815
		1100	3	400	1200	19-25829	19-25831
	1800	600	3	500	1500	19-25801	19-25803
		800	3	500	1500	19-25817	19-25819
		1100	3	500	1500	19-25833	19-25835
	2200	600	3	550	1650	19-25805	19-25807
		800	3	550	1650	19-25821	19-25823
		1100	3	550	1650	19-25837	19-25839
	2700	600	3	700	2100	19-25809	19-25811
		800	3	700	2100	19-25825	19-25827
		1100	3	700	2100	19-25841	19-25843
2500	1350	600	4	400	1600	19-25845	19-25847
		800	4	400	1600	19-25861	19-25863
		1100	4	400	1600	19-25877	19-25879
	1800	600	4	500	2000	19-25849	19-25851
		800	4	500	2000	19-25865	19-25867
		1100	4	500	2000	19-25881	19-25883
	2200	600	4	550	2200	19-25853	19-25855
		800	4	550	2200	19-25869	19-25871
		1100	4	550	2200	19-25885	19-25887
	2700	600	4	700	2800	19-25857	19-25859
		800	4	700	2800	19-25873	19-25875
		1100	4	700	2800	19-25889	19-25891





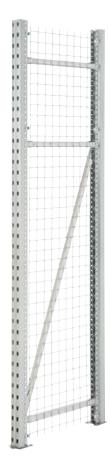

Frames for wide span shelving, unassembled

- Available in a variety of height, depth and load capacity options to suit any application
- Frames are to be assembled on site by bolting together uprights with horizontal and diagonal
- Robust base plates, bolt-on fitting to uprights to make a very solid connection
- Base plates come pre-drilled for optional floor anchoring
- All components galvanised

	for a shelving depth of	600 mm	800 mm	1100 mm
Height	Upright type	Ref. no.	Ref. no.	Ref. no.
mm				
2000	F2	19-25287	19-25290	19-25293
	F3	19-25296	19-25300	19-25304
2500	F2	19-25288	19-25291	19-25294
	F3	19-25297	19-25301	19-25305
3000	F2	19-25289	19-25292	19-25295
	F3	19-25298	19-25302	19-25306
3500		19-25299	19-25303	19-25307

Frames for wide span shelving, assembled

	for a shelving depth of	600 mm	800 mm	1100 mm
Height	Upright type	Ref. no.	Ref. no.	Ref. no.
mm				
2000	F2	19-25267	19-25270	19-25273
	F3	19-25276	19-25279	19-25283
2500	F2	19-25268	19-25271	19-25274
	F3	19-25277	19-25280	19-25284
3000	F2	19-25269	19-25272	19-25275
	F3	19-25278	19-25281	19-25285
3500		19-25308	19-25282	19-25286

Level spacing (FA)	Bay load Q _{max}		1 2 3 4
	Upright type F2	Upright type F3	
mm	kg	kg	
400	3900	6200	1 2 3
600	2975	5500	FA. III
800	2050	4800	
1000	1775	3900	kg -10%
1200	1500	3000	10%
1400	1225	2675	_
1600	950	2350	-

Wire-mesh side cladding for frames

- Keeps items from falling down sideways
- Grid infill 50 x 50 mm
- Galvanised

for a shelving depth of	600 mm	800 mm	1100 mm
Height	Ref. no.	Ref. no.	Ref. no.
mm			
2000	19-47963	19-47964	19-47965
2500	19-47966	19-47967	19-47968
3000	19-47969	19-47970	19-47971



Complete levels

Perfect for order picking

- Complete levels with a load capacity of 400 to 700 kg to suit many storage applications
- Delivery includes stepped beams type WT
- The robust step of the beam covers the edges of chipboard or steel panels and protects them from potential damage during pallet infeeding and outfeeding

With chipboard decking

- Unbeatable price-performance ratio
- Chipboard panels are 22 mm thick, quality V20 E1


	for a shelving depth of	600 mm	800 mm	1100 mm
Bay width	Load capacity	Ref. no.	Ref. no.	Ref. no.
mm	kg			
1350	400 kg	19-25617	19-25619	19-25615
1800	500 kg	19-13098	19-13106	19-13114
2200	550 kg	19-13100	19-13108	19-13116
2700	500 kg	19-13102	19-13110	19-13118



With drop-in steel panel decking

- Safe storage of heavy loads of up to 700 kg per level
- Flat surfaced, galvanised steel panels allow convenient and effortless order picking

	for a shelving depth of	600 mm	800 mm	1100 mm
Bay width	Load capacity	Ref. no.	Ref. no.	Ref. no.
mm	kg			
1350	400 kg	19-25611	19-25613	19-25609
1800	500 kg	19-17636	19-17637	19-17638
2200	550 kg	19-17639	19-17640	19-17641
2700	700 kg	19-17642	19-17643	19-17644



With wire mesh shelves

- Ideal for order picking (lets light and water through)
- Grid infill 50 x 50 mm, galvanised
- Easy picking even in poor light conditions

	for a shelving depth of	600 mm	800 mm	1100 mm
Bay width	Load capacity	Ref. no.	Ref. no.	Ref. no.
mm	kg			
1350	400 kg	19-28785	19-28795	19-28805
1800	500 kg	19-28787	19-28797	19-28807
2200	550 kg	19-28789	19-28799	19-28809
2700	500 kg	19-28791	19-28801	19-28811
	700 kg	19-28793	19-28803	19-28813





Complete levels

Accessories







Wire-mesh back cladding




Bracket for back cladding







Shims



Pos. Description **Dimensions** Ref. no. Pcs/ pack A L 165 x W 165 x H 400 66-4585 Column guards compliant with the latest health and safety regulations stipulating L-shaped for that column guards must be fitted at the ends of each racking row, 2-sided protection epoxy-coated in signal yellow, RAL 1003, yellow/black signal strip-U-shaped for L 227 x W 164 x H 400 66-29123 ing compliant to DIN 4844, for 2 side and for 3 side protection, reli-3-sided protection able protection of shelving and racking as well as service vehicles, clearly reduces damage to uprights and columns, thereby reducing idle times and costs, increased operator safety Wire-mesh back protects traffic ways and work areas against falling items, traffic W 1350 x H 1000 66-27793 cladding ways and work areas located behind single racking rows must be W 1350 x H 1500 66-27799 secured against falling items in compliance with the latest safety W 1800 x H 1000 66-27794 regulations, from galvanised steel, mesh width 50 x 100 mm, in W 1800 x H 1500 66-27800 beaded areas reduced mesh width of 50 x 50 mm, 3.0 mm gridbars, Please note: brackets are not included in the price! Cladding W 2200 x H 1000 66-27795 segments are fixed with 4 brackets, for every other segment added, W 2200 x H 1500 66-27801 only 2 brackets are required W 2700 x H 1000 66-27796 W 2700 x H 1500 66-27802 Bracket for back galvanised, for mounting wire-mesh back cladding, including fixings left-hand side 19-27200 cladding 19-27201 right-hand side Anchor bolts Ø 10 mm, steel grade 10/20, 2 floor anchors required per frame M10-20 galvanised L 20 10 66-3408 (pack of 10 pcs.) Shims 1 mm thick, galvanised, to compensate floor unevenness for wide span L 103 x W 80 20 19-26451 shelving Cross dividers galvanised, easy to assemble, including fixings for steel panels H 250 x D 600D 600 1 19-18926 H 250 x D 800D 800 19-18927 19-18928 H 250 x D 1100D 1100

Wide span shelving – coordinating products

European size stacking containers XL

standard version

Our all-rounder for a broad range of applications

- Large volume
- From hardwearing polypropylene
- Extremely strong









External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Colour	Ref. no.
mm	mm	mm	litres	kg	kg			
600 x 400	320	568 x 368 x 316	62	20	300	XL64321		43-18498

European size stacking containers XL

with ready-mounted runners and closed sides

Safe, clean and strong – a valuable asset to production logistics in any sector

- Containers are the size of half a Euro pallet
- Load capacity 200 kg
- 5 height options
- Also available without runners
- Containers with lid and pick opening







External dimensions L x W	Height	Internal dimensions L x W x H	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	mm	litres	kg	kg		
800 x 600	620	762 x 562 x 501	206	200	800	XL86521DKUFE	43-22585

Multi-purpose containers MB with double base

with hinged interlocking lid and fork entry shoes

Our large volume containers 800 x 600 mm are nestable even if fork entry shoes are mounted!

- 3 products in 1 storage, order picking and transport
- First container that can be nested with fork entry shoes mounted
- Nest to reduce volume for empty storage and transportation
- Easy to handle, integral grip





External dimensions L x W	Height	Volume	Load capacity	Stacking load	Bin type	Ref. no.
mm	mm	litres	kg	kg		
800 x 600	553	147	200	300	MBD86421DKUFE	6-15319

Hand pallet trucks

Hand pallet trucks

Ideal for lifting, moving and positioning heavy or awkward loads

- Designed for in-house transport of palletised loads
- Suited for the professional handling of palletised loads and mesh box pallets in demanding environments
- Turning angle 2 x 105°, tandem load rollers, stair climber rollers at fork tips
- Load capacity 2500 kg!

Load capacity	Width over forks	Fork dim. L x W	Load rollers made from	Swivel castors made from	Ref. no.
kg	mm	mm			
2500	540	1150 x 160	polyurethane	solid rubber	22-21229





PRO Pallet racking

We know how to handle pallets!

BITO PRO pallet racking is manufactured in Meisenheim with state-of-the-art production methods and in accordance with the most demanding industry standards. Utmost precision in profile bending and durable epoxy coating are only some features of our products. Another benefit is our wide range of practical accessories to suit any storage requirement.

Benefit from manufacturer competence: our professional sales teams know the trade and ensure that your storage solution has the perfect fit. Our components are galvanised or epoxycoated for high corrosion resistance.

Please note: This racking system has been designed for in-door use only. The indicated load capacities are not valid for earthquake hazard zones. If your storage and order picking facility is intended for use in a seismic hazard zone, please inform BITO in advance!










We know how to handle pallets!

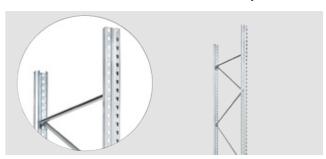

Sturdy frames for extremely high loads

- Made from top quality strip steel
- Supplied unassembled, can also be supplied fully assembled
- Galvanised
- Level spacing adjustable in 50 mm increments
- Including fixing material and shims




Drop-on decking for box-type beams

- Chipboard panels
- 2 Drop-over steel panels
- Mesh decks
- 4 Light-duty wire-mesh deck segments, galvanised


Broad range of accessories and safety equipment for any storage application

- 1 Column guard L-shaped
- Column guard U-shaped
- Upright protector
- 4 Fencing
- Back stop
- 6 Back cladding
- Bracket for back stop and back cladding
- 8 Frame extension
- Spacer for back-to-back rows

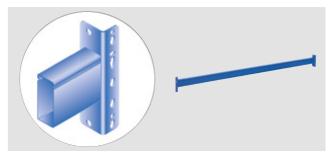


Beams from one-of-a-kind BITO-Twintop® profiles

- Provide excellent lengthwise rigidity to racking construction
- Innovative profile geometry
- Beams can be adjusted in height on a 50 mm pitch, thus allowing optimum adaptation to loading heights
- Scratch resistant epoxy coating
- Each hook connector has 5 hooks

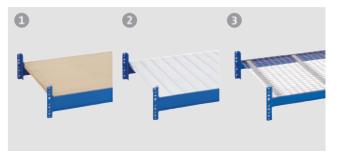

Drop-in decking for stepped beams

- Chipboard panels
- 2 Drop-in steel panels
- Mesh decks

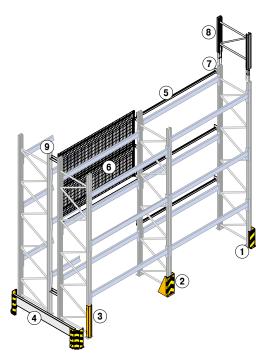



Pallet racking - complete units

pallet weight 600 kg, bay width 2700 mm

Attractive price-performance ratio

- Suited for Euro pallets handled short side facing
- Beams are epoxy-coated in gentian blue, RAL 5010
- Level spacing adjustable in 50 mm increments
- Including fixing material and 4 anchor anchor bolts per frame for floor anchoring
- Frames are supplied unassembled
- **UDL** assumed for all load capacities






Assembly service

For your convenience, each delivery comes with instructions for assembly and use for quick and easy installation. All assembly steps and directions of use are illustrated in detail. Upon request we are pleased to submit an offer for on-site installation by our experienced assembly teams.

Racking width approx.	Shelving height	External bay depth	Loading direction	Number of bays	Number of beam levels	Load per level	Bay load	Upright type	Maximum level spacing	Total capacity in Euro pallets	Ref. no.
	mm	mm				kg	kg		mm		
5670	2500	1100	short side facing	2	2	1800	3600	P1	2000	18	66-42134
	3000	1100	short side facing	2	2	1800	3600	P1	2200	18	66-42143
	3500	1100	short side facing	2	2	1800	3600	P1	2200	18	66-42152
	4000	1100	short side facing	2	2	1800	3600	P1	2500	18	66-42161
	4000	1100	short side facing	2	3	1800	5400	P1	1500	24	66-42170
	4500	1100	short side facing	2	2	1800	3600	P1	2200	18	66-42179
	4500	1100	short side facing	2	3	1800	5400	P1	1500	24	66-42188
8460	2500	1100	short side facing	3	2	1800	3600	P1	2000	27	66-42135
	3000	1100	short side facing	3	2	1800	3600	P1	2200	27	66-42144
	3500	1100	short side facing	3	2	1800	3600	P1	2200	27	66-42153
	4000	1100	short side facing	3	2	1800	3600	P1	2500	27	66-42162
	4000	1100	short side facing	3	3	1800	5400	P1	1500	36	66-42171
	4500	1100	short side facing	3	2	1800	3600	P1	2200	27	66-42180
	4500	1100	short side facing	3	3	1800	5400	P1	1500	36	66-42189

Extension bays for pallet racking, pallet weight 600 kg



				approx.		
For a shelving height of	External bay depth	Loading direction	Number of beam levels	Upright type	Ref. no.	Ref. no.
mm	mm					
2500	1100	short side facing	2	P1	66-42812	66-42761
3000	1100	short side facing	2	P1	66-42813	66-42762
3500	1100	short side facing	2	P1	66-42814	66-42763
4000	1100	short side facing	2	P1	66-42815	66-42764
4000	1100	short side facing	3	P1	66-42816	66-42765
4500	1100	short side facing	2	P1	66-42817	66-42766
4500	1100	short side facing	3	P1	66-42818	66-42767

Accessories







Pos.	Description		Dimensions	Beam profile	Ref. no.
			mm		
A	Beams	BITO TwinTop®	L 1800 x H 95	PT 95L	66-23656
		profile, type 95L	L 2700 x H 95	PT 95L	66-23658
B	Column guards	L-shaped for 2-sided protection	L 165 x W 165 x H 400	-	66-4585

Racking width 1890 mm

2790 mm





Pallet racking - complete units

pallet weight 800 kg, bay width 2700 mm

Benefit from excellent workmanship!

- Suited for Euro pallets handled short side facing
- Beams are epoxy-coated in gentian blue, RAL 5010
- Level spacing adjustable in 50 mm increments
- Including fixing material and 4 anchor anchor bolts per frame for floor anchoring
- Frames are supplied unassembled
- UDL assumed for all load capacities



Assembly service

For your convenience, each delivery comes with instructions for assembly and use for quick and easy installation. All assembly steps and directions of use are illustrated in detail. Upon request we are pleased to submit an offer for on-site installation by our experienced assembly teams.



Racking width approx.	Shelving height	External bay depth	Loading direction	Number of bays	Number of beam levels	Load per level	Bay load	Upright type	Maximum level spacing	Total capacity in Euro pallets	Ref. no.
	mm	mm				kg	kg		mm		
5670	2500	1100	short side facing	2	2	2400	4800	P1	2000	18	66-42287
	3000	1100	short side facing	2	2	2400	4800	P1	2200	18	66-42296
	3500	1100	short side facing	2	2	2400	4800	P1	2200	18	66-42305
	4000	1100	short side facing	2	2	2400	4800	P1	2200	18	66-42314
	4000	1100	short side facing	2	3	2400	7200	P2	1750	24	66-42323
	4500	1100	short side facing	2	2	2400	4800	P1	2200	18	66-42332
	4500	1100	short side facing	2	3	2400	7200	P2	1750	24	66-42341
8460	2500	1100	short side facing	3	2	2400	4800	P1	2000	27	66-42288
	3000	1100	short side facing	3	2	2400	4800	P1	2200	27	66-42297
	3500	1100	short side facing	3	2	2400	4800	P1	2200	27	66-42306
	4000	1100	short side facing	3	2	2400	4800	P1	2200	27	66-42315
	4000	1100	short side facing	3	3	2400	7200	P2	1750	36	66-42324
	4500	1100	short side facing	3	2	2400	4800	P1	2200	27	66-42333
	4500	1100	short side facing	3	3	2400	7200	P2	1750	36	66-42342

Extension bays for pallet racking, pallet weight 800 kg



				Racking width approx.	1890 mm	2790 mm
For a shelving height of	External bay depth	Loading direction	Number of beam levels	Upright type	Ref. no.	Ref. no.
mm	mm					
2500	1100	short side facing	2	P1	66-42812	66-42778
3000	1100	short side facing	2	P1	66-42813	66-42779
3500	1100	short side facing	2	P1	66-42814	66-42780
4000	1100	short side facing	2	P1	66-42815	66-42781
4000	1100	short side facing	3	P2	66-42833	66-42782
4500	1100	short side facing	2	P1	66-42817	66-42783
4500	1100	short side facing	3	P2	66-42835	66-42784

Accessories







Pos.	Description		Dimensions	Beam profile	Ref. no.
			mm		
A	Beams	BITO TwinTop® profile, type 95L	L 1800 x H 95	PT 95L	66-23656
		BITO TwinTop® profile, type 110L	L 2700 x H 110	PT 110L	66-23650
B	Column	L-shaped for 2-sided protection	L 165 x W 165 x H 400	-	66-4585

A Beams

Pallet racking - complete units

pallet weight 1000 kg, bay width 2700 mm

Load capacities per level up to 3000 kg

- Suited for Euro pallets handled short side facing
- Beams are epoxy-coated in gentian blue, RAL 5010
- Level spacing adjustable in 50 mm increments
- Including fixing material and 4 anchor anchor bolts per frame for floor anchoring
- Frames are supplied unassembled
- UDL assumed for all load capacities





Assembly service

For your convenience, each delivery comes with instructions for assembly and use for quick and easy installation. All assembly steps and directions of use are illustrated in detail. Upon request we are pleased to submit an offer for on-site installation by our experienced assembly teams.

Racking width approx.	Shelving height	External bay depth	Loading direction	Number of bays	Number of beam levels	Load per level	Bay load	Upright type	Maximum level spacing	Total capac- ity in Euro pallets	Ref. no.
	mm	mm				kg	kg		mm		
5670	2500	1100	short side facing	2	2	3000	5400	P1	2000	18	66-42440
	3000	1100	short side facing	2	2	3000	5400	P1	2000	18	66-42449
	3500	1100	short side facing	2	2	3000	5400	P1	2000	18	66-42458
	4000	1100	short side facing	2	2	3000	5400	P1	2000	18	66-42467
	4000	1100	short side facing	2	3	3000	8400	P2	1250	24	66-42476
	4500	1100	short side facing	2	2	3000	5400	P1	2000	18	66-42485
	4500	1100	short side facing	2	3	3000	8400	P2	1250	24	66-42494
8460	2500	1100	short side facing	3	2	3000	5700	P1	2000	27	66-42441
	3000	1100	short side facing	3	2	3000	5700	P1	2000	27	66-42450
	3500	1100	short side facing	3	2	3000	5700	P1	2000	27	66-42459
	4000	1100	short side facing	3	2	3000	5700	P1	2000	27	66-42468
	4000	1100	short side facing	3	3	3000	8800	P2	1250	36	66-42477
	4500	1100	short side facing	3	2	3000	5700	P1	2000	27	66-42486
	4500	1100	short side facing	3	3	3000	8800	P2	1250	36	66-42495

Extension bays for pallet racking, pallet weight 1000 kg



				approx.		
For a shelving height of	External bay depth	Loading direction	Number of beam levels	Upright type	Ref. no.	Ref. no.
mm	mm					
2500	1100	short side facing	2	P1	66-42846	66-42795
3000	1100	short side facing	2	P1	66-42847	66-42796
3500	1100	short side facing	2	P1	66-42848	66-42797
4000	1100	short side facing	2	P1	66-42849	66-42798
4000	1100	short side facing	3	P2	66-42850	66-42799
4500	1100	short side facing	2	P1	66-42851	66-42800
4500	1100	short side facing	3	P2	66-42852	66-42801

Accessories





	_
B	Column guards

Pos.	Descrip	tion	Dimensions	Beam profile	Ref. no.
			mm		
A	Beams	BITO TwinTop® profile, type 95L	L 1800 x H 95	PT 95L	66-23656
		BITO TwinTop® profile, type 120M	L 2700 x H 120	PT 120M	66-23660
B	Column guards	L-shaped for 2-sided protection	L 165 x W 165 x H 400	-	66-4585


Racking width 1890 mm

2790 mm

A Beams

Pallet racking frames

Suited for beam type	Level spacing (FA)	Bay load Q _{max}						
		Upright type P1	Upright type P2	Upright type P3	Upright type P4			
	mm	kg	kg	kg	kg			
PT95L	1500	6000	8860	11720	13900			
	2000	5560	7460	8900	10360			
	2500	4580	5920	6660	7680			
PT110L	1500	6000	8860	11720	15260			
	2000	5720	7460	8900	12620			
	2500	4880	6200	6660	9720			
PT120M	1500	6000	9175	12100	15750			
	2000	6000	7680	10240	14000			
	2500	4880	6820	9140	11780			



All values refer to a bay width of 2700 mm and racking rows of at least 4 bays. Shorter racking rows have a lower load capacity (cf. drawing on the right); the same applies to 3600 mm wide bays (please ask our team!).

Unassembled

- Made from top quality strip steel
- Level spacing adjustable in 50 mm increments
- Delivery includes 2 uprights with base plate, horizontal and diagonal struts
- Fixed with 2 anchor bolts per base plate to avoid torsion, supplied with anchor bolts and 2 shims (1.5 mm thick) per frame
- Frames are supplied 1100 or 800 mm deep to allow long side on or short side on pallet handling


		Frame depth	1100 mm	800 mm
Frame height	Upright type	Bay load	Ref. no.	Ref. no.
mm		kg		
2000	P1	6000	66-25216	66-25217
2500	P1	6000	66-25214	66-25215
2500	P2	9175	66-24551	66-24553
3000	P1	6000	66-25212	66-25213
3000	P2	9175	66-25199	66-25200
3500	P1	6000	66-25210	66-25211
3500	P2	9175	66-25197	66-25198
3500	P3	12100	66-26078	66-26077
4000	P1	6000	66-25208	66-25209
4000	P2	9175	66-25195	66-25196
4000	P3	12100	66-25182	66-25183
4500	P1	6000	66-25206	66-25207
4500	P2	9175	66-25193	66-25194
4500	P3	12100	66-25180	66-25181
4500	P4	15750	66-26080	66-26079
5000	P4	15750	66-25165	66-25166



9

More frame height options on shop.bito.com or call us on 0 67 53 122-789

Pallet racking frames

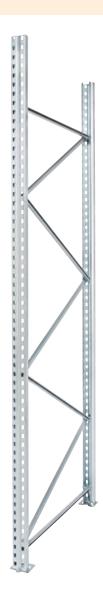

Assembled

- Our customer service: bolted frames, supplied ready-mounted
- Made from top quality strip steel
- Level spacing adjustable in 50 mm increments
- Delivery includes 2 uprights with base plate, horizontal and diagonal struts
- Fixed with 2 anchor bolts per base plate to avoid torsion, supplied with anchor bolts and 2 shims (1.5 mm thick) per frame
- Frames are supplied 1100 or 800 mm deep to allow long side on or short side on pallet handling

		Frame depth	1100 mm	800 mm
Frame height	Upright type	Bay load	Ref. no.	Ref. no.
mm		kg		
2000	P1	6000	66-24521	66-24520
2500	P1	6000	66-24523	66-24522
2500	P2	9175	66-24548	66-24552
3000	P1	6000	66-24525	66-24524
3000	P2	9175	66-24539	66-24538
3500	P1	6000	66-24527	66-24526
3500	P2	9175	66-24541	66-24540
3500	P3	12100	66-26074	66-26073
4000	P1	6000	66-24529	66-24528
4000	P2	9175	66-24543	66-24542
4000	P3	12100	66-24557	66-24556
4500	P1	6000	66-24531	66-24530
4500	P2	9175	66-24545	66-24544
4500	P3	12100	66-24559	66-24558
4500	P4	15750	66-26076	66-26075
5000	P4	15750	66-24575	66-24574



More frame height options on **shop.bito.com** or call us on **0 67 53 122-789**

Accessories



Pos.	s. Description				Pcs/ pack	Ref. no.
A	Shims	galvanised, for compensating floor unevenness, easy to slide under the base plates of frames, can also be retro-fitted, shimming is only admissi-	for pallet racking, material thickness 4 mm	P1 - P3	1	66-22830
		ble up to 10 mm max. per base plate, for any floor unevenness exceeding 10 mm it is imperative to use longer anchor bolts	for pallet racking, material thickness 1.5 mm (pack of 20 pcs)	P1 - P3	20	66-27219
B	Anchor bolts	Ø 10 mm, steel grade 10/20, 2 floor anchors required per frame	M10-20 galvanised (pack of 10 pcs.)	-	10	66-3408
C	Column guards		L-shaped for 2-sided protection	P1-P12	1	66-4585




Beams

BITO TwinTop® profile

- 5 hooks per connector provide reliable form and force locking
- Gives excellent lengthwise rigidity to racking construction
- Height adjustable on a 50 mm pitch allowing optimum adaptation to the dimensions of stocked loads
- **■** Epoxy-coated in gentian blue, RAL 5010



Beam length	Load cap. per pair of beams	Beam profile	Ref. no.
mm	kg		
1350	2000	PT 95L	66-24891
1800	2500	PT 95L	66-23656
2200	2100	PT 95L	66-23652
2700	1800	PT 95L	66-23658
	2400	PT 110L	66-23650
	3050	PT 120M	66-23660
	4250	PT 150M	66-28621
3300	2350	PT 120M	66-23654
	3500	PT 150M	66-28623
3600	2400	PT 130M	66-23664
	3200	PT 150M	66-27655
	4000	PT 170S	66-23670



Accessories



Pos.	Description		For a shelving depth of	Load cap./pce	Ref. no.
			mm	kg	
A	Pallet support bars	efficient pallet support; easy drop-on fitting onto beams, drill bolt-fixing possi-	800	640	66-29295
		ble to prevent pallet support bars from being pushed sideways, galvanised, 2 required per pallet position	1100	440	66-29300
B	Pallet support bars,	efficient pallet support; easy drop-on fitting onto beams, designed for safe	800	1350	66-30603
	timber topped, unassembled	storage of tools and sheet material, pallet support bar galvanised, squared timber bars 80 x 80 mm, with 2 drilled holes each to accept round head screws M10 x 100, 2 required per pallet position	1100	1090	66-30605
0	Support trays, with back	suited for PT beams, the support tray prevents containers, wire-mesh box	800	1000	66-28226
	stop, unassembled	pallets and pallets (whether handled short side or long side facing) from being pushed too far back or dislodged	1100	1000	66-28230

Level decking options to fit BITO-TwinTop® beams



Chipboard panels with 4 positioning angles each

- Classic drop-on decking option that suits most applications
- Chipboard panels are 38 mm thick, quality V20 E1
- Positioning angles are galvanised
- Supplied with fixing material for bolt-on mounting to BITO TwinTop® beams
- Please order BITO TwinTop® beams separately

External bay depth	1100 mm	1100 mm		
Suited for a beam length of	Load cap. per level	Ref. no.	Load cap. per level	Ref. no.
mm	kg		kg	
1350	650	66-8807	1200	66-19377
1800	900	66-8810	1600	66-19378
2200	1100	66-8811	1950	66-19379
2700	1350	66-8812	1650	66-19380
3300	1650	66-8813	1400	66-19381
3600	1800	66-8814	1300	66-19382



Chipboard panels on support bars

- Square-tubed support bars provide additional support to these heavy-duty shelves
- Level decking sits flush with the box-type beams
- Chipboard panels are 38 mm thick, quality V20 E1
- Pallet support bars are epoxy-coated in gentian blue, RAL 5010
- Supplied with support bars
- Please order BITO TwinTop® beams separately

	External bay depth	1100 mm		800 mm	
Suited for a beam length of	Number of support bars	Load cap. per level	Ref. no.	Load cap. per level	Ref. no.
mm		kg		kg	
1350	3	1500	66-29353	1500	66-29347
1800		2200	66-29354	1800	66-29348
2200	4	2100	66-29355	2100	66-29349
2700		3000	66-29356	2200	66-29350
3300	5	3300	66-29357	2800	66-29351
3600	1	3300	66-29358	2300	66-29352





Drop-on steel panels

- Suited for particularly high beam load capacities
- The lipped short sides of the panels sit flush on the beams
- Level decking consisting of individual steel panels
- Please order BITO TwinTop® beams separately

	External bay depth	1100 mm	800 mm
Suited for a beam length of	Load cap. per level	Ref. no.	Ref. no.
mm	kg		
1350	1500	66-19005	66-18999
1800	2000	66-19006	66-19000
2200	2200	66-19007	66-19001
2700	3050	66-19008	66-19002
3300	3300	66-19009	66-19003
3600	4000	66-19010	66-19004



i BITO info

Do not exceed maximum beam load capacities. Beams are not included in the price.

Hot-dip galvanised mesh decks

- Good air circulation and water permeability
- Ideal for warehouses in which a sprinkler system has to be installed
- Lipped edges allow flush drop-on fitting on beams without adding to the level height
- Grid infill 66 x 33 mm
- Mesh decking accepts high load capacities
- Force-fit connection of grid bars with the angled frame makes mesh decks particularly suited for heavy duty applications
- Easy and fast drop-on fitting onto the box-type beams
- Stocked goods can also be identified from a lower position
- Please order BITO TwinTop® beams separately

		for a shelving depth of	1100 mm	800 mm
Description	Suited for a beam length of	Load cap. per level	Ref. no.	Ref. no.
	mm	kg		
1 segment	1350	900	66-40876	
		1500	66-40877	66-40870
	1800	1200	66-40878	
		2000	66-40879	66-40871
2 segments	2200	2400	66-40880	66-40872
	2700	1800	66-40881	
		3000	66-40882	66-40873
	3300	3600	66-40883	66-40874
	3600	2400	66-40884	
		4000	66-40885	66-40875

Drop-on wire shelves


- Low cost alternative to hot-dipped galvanized mesh decks
- Good air circulation and water permeability
- Comply with fire prevention regulations to protect your warehouse water permeability exceeds 70%
- Ideal for storing and picking cartons, bins and containers
- No sharp edges that could cause damage to cartons and reduce picking speed
- Easy and fast drop-on fitting onto beams
- Supplied with support bars already welded to the segments
- Please order BITO TwinTop® beams separately

External bay depth	Suited for a beam length of	Segment dimensions	Load cap. per level	Ref. no.
mm	mm	mm	kg	
800	1350	1325x800	500	66-44412
		1325x800	1000	66-40517
	2700	1325x800	1000	66-44413
		1325x800	2000	66-40518
1100	1350	1325x1100	1000	66-40510
	1800	890x1100	500	66-44414
		890x1100	1500	66-40511
		890x1100	2000	66-40512
	2700	890x1100	750	66-44415
		1325x1100	2000	66-40513
		890x1100	3000	66-40514
	3600	890x1100	1000	66-44416
		890x1100	3000	66-40515
		890x1100	4000	66-40516











Left: fire propagation with solid steel sheet shelves Right: fire propagation with wire-mesh shelves that allow water to pass



Everything within easy reach!

Pull-out units - designed for ergonomic working

- Ideal, strain-free order picking from 3 sides
- For pallets handled long side on and a size of 1200 x 800 mm
- Floor mounted or beam mounted unit
- Supplied with safety locking mechanism for use as beam mounted unit
- Pallets can be pulled out from the racking without effort
- Hard wearing steel construction with smoothly operating, sealed roller bearings
- Designed for a racking depth of 1100 mm
- Epoxy-coated in gentian blue RAL 5010
- Floor mounted unit supplied with 700 mm handle

Description	Height adjustment range	Pull-out capacity	Load capacity	Ref. no.
	mm		kg	
for use as beam	90	70 %	600	34-33200
mounted unit			800	34-33201
for use as floor	80	85 %	800	34-33195
mounted unit			1000	34-33196



Scan this QR code:

Product video **Extraction Unit**

www.bito.com/qr-azv-int

i BITO info

Please note:

Pulling out a beam mounted extraction unit creates an off-centre load, i.e. the front beam will carry the entire admissible load per level.

For this reason, pallet racking with extraction units require beams with double load capacity and the beams must be bolted to the uprights!

Make sure that you only pull out 1 extraction unit at a time in racking with several extraction units per level or per bay. Immediately push back the extraction unit after use and lock it!

Extraction units for load carriers with other dimensions are available upon request.







Suitable bins from page 48

Rack end barrier

Rack end barrier

- Protect short sides of shelving and racking runs and increase operator safety
- Since this barrier encloses both uprights of a frame, no extra column guards are required to protect the ends of a racking row
- Epoxy-coated in signal yellow, RAL 1003, yellow/black signal striping compliant to DIN 4844
- Galvanised steel sheet plank
- Delivery includes fixing material and heavy duty floor anchors
- Compliant with the latest health and safety regulations
- Clearly reduces damage to uprights and columns, thereby reducing idle times and costs
- A second steel plank can be added for increased safety

	Rack end barrier	Additional fencing planks
Dimensions L x D x H	Ref. no.	Ref. no.
_mm		
1200 x 270 x 400	66-40937	66-40933
2500 x 270 x 400	66-40936	66-40932

In-line posts for fencing rows


- The in-line post and additional fencing planks allow to extend barrier length as required
- Helps to set up longer fencing rows
- This sturdy barrier system protects warehouse and operating equipment from damage
- Supplied with heavy duty floor anchors

Dimensions L x D x H	Ref. no.
mm	
250 x 201 x 400	66-40924





Shelving & racking protection



- Provide protection against collision damage and prevent downtimes
- Epoxy-coating in signal yellow, RAL 1003, provides high visibility
- Bolt-on fixing to upright no floor fixing to prevent damage to flooring if upright is hit by a
- Designed to fit BITO pallet racking PRO
- Delivery includes fixing material
- Material steel

Height	Width	Upright type	Ref. no.
mm	mm		
715	80	P1	66-31000
	90	P2	66-31001
	100	P3	66-31002
	120	P4-6	66-31003



Scan this QR code:

Product video on upright protectors

www.bito.com/ qr-stuetzenschutz-int





Column guards

- Compliant with the latest health and safety regulations stipulating that column guards must be fitted at the ends of each racking row
- Epoxy-coated in signal yellow, RAL 1003, yellow/black signal striping compliant to DIN 4844
- For 2 side and for 3 side protection
- Reliable protection of shelving and racking as well as service vehicles
- Clearly reduces damage to uprights and columns, thereby reducing idle times and costs
- Increased operator safety

Height mm	Description	Features	Upright type	Ref. no.
400	L-shaped for 2-sided protection	supplied with 4 heavy duty floor anchors Ø 12 mm	P1-P12	66-4585
	U-shaped for 3-sided	supplied with 4 chemical floor anchors	P1-P3	66-29123
	protection	M12	P4-P12	66-29125



More info on our upright types from page 186



Flexible upright protectors

Flexible upright protectors

- Optimum protection for shelving and racking uprights, thereby reducing idle times and costs
- Flexible PVC, resilient, dimensionally stable material bounces back to original shape
- Impact energy is absorbed at the front and at the sides no damage to floor
- Certified by the German Inspection Association TÜV to validate product safety
- Available in various dimensions to fit upright types P1 P6



Protection from side impacts



Protection from front impacts



Tool kit for adjusting flexible buffer profiles

Flexible upright protectors

- Material plastic
- Colour yellow

Height	Upright type	Ref. no.
mm		
600	P1	46-45600
	P2	46-45601
	P3	46-45602
	P4-P6	46-45603

Tool kit for adjusting flexible buffer profiles, for flexible upright protectors

- Flexible upright protectors only be mounted with this tool kit. Please add this item to your order
- Material plastic

	Ref. no.
Tool kit for adjusting flexible buffer profiles for flexible upright protectors	46-45604









Assembly instructions can be downloaded from www.bito.com





Safety equipment



Solid back stop

- Prevents pallets from being pushed too far in back-to-back racking
- In compliance with safety regulations for back-to-back racking stipulating that a protective back stop must be installed if the distance between pallets stored on either side of a racking level is less than 100 mm
- Solid square-tube sections, 50 mm wide
- Push-in fitting into bracket cut-outs, secured with splint pins
- Including bracket and fixing material
- Mounted to the frames with a distance of 75 mm to ensure easy and optimum centering of Euro pallets handled short side facing

Beam length	Ref. no.
mm	
1350	66-22888
1800	66-22945
2200	66-22947
2700	66-22949
3300	66-22951
3600	66-22953



Wire-mesh back cladding

- Protects traffic ways and work areas against falling items
- Traffic ways and work areas located behind single racking rows must be secured against falling items in compliance with the latest safety regulations
- From galvanised steel, mesh width 50 x 100 mm, in beaded areas reduced mesh width of 50 x 50 mm, 3.0 mm gridbars
- Please note: brackets are not included in the price! Cladding segments are fixed with 4 brackets, for every other segment added, only 2 brackets are required

Height	1000 mm	1500 mm
Beam length	Ref. no.	Ref. no.
mm		
1350	66-27793	66-27799
1800	66-27794	66-27800
2200	66-27795	66-27801
2700	66-27796	66-27802
3300	66-27797	66-27803
3600	66-27798	66-27804



Brackets for back stops and back cladding

- Length x + 70 mm
- Galvanised finish
- Delivery includes fixing material
- To fix back stop and/or wire-mesh back cladding

Description	right-hand bracket	left-hand bracket
Length x	Ref. no.	Ref. no.
mm		
25	66-27160	66-27161
75	66-27162	66-27163
100	66-27164	66-27165



Frame extension

- In compliance with the latest safety regulations, this 750 mm high frame extension prevents items from falling from the top level at the short sides of racking rows, bolt-on fixing
- Galvanised finish
- Delivery includes fixing material

	Frame depth	1100 mm	800 mm
Height of frame extension	Upright type	Ref. no.	Ref. no.
mm			
750	P1	66-24501	66-24500
	P2	66-24503	66-24502
	P3	66-24505	66-24504
	P4-P6	66-24507	66-24506



Spacers for back-to-back pallet racking rows

- Galvanised finish
- Delivery includes fixing material
- Required according to EN15635
- 2 spacers per upright required for uprights facing each other in back-to-back racking

Wall spacing	Ref. no.
mm	
200	66-20020
250	66-29276
300	66-20076







Order picking of palletised loads

Pallet live storage

Retrofit your static pallet racking with flow levels!

Optimise picking ergonomics and productivity!



Please note: This racking system has been designed for in-door use only. The indicated load capacities are not valid for earthquake hazard zones. If your storage and order picking facility is intended for use in a seismic hazard zone, please inform BITO in advance!



Roller conveyor module, suited for hand pallet truck retrieval




Roller conveyor module, full width rollers



Roller conveyor module, two track option




Roller track module with flanged plastic rollers

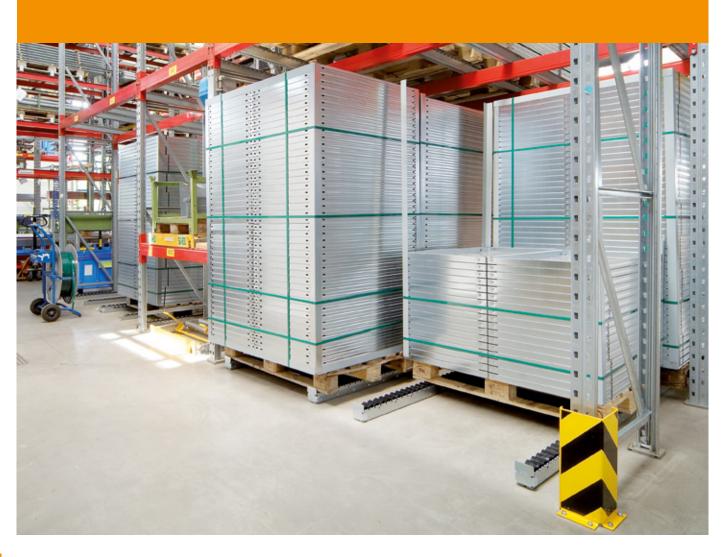

BITO

Benefits of retrofitting static pallet racking

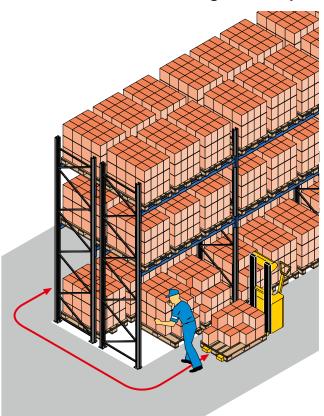

Before flow level fitting

Example:

Double deep pallet racking row

Goods are picked directly off the pallet. In conventional pallet storage installations, items in the back of the floor level can only be picked by bending and stretching.





After flow level fitting

Example:

Double deep pallet racking row

The floor level has been fitted with a roller conveyor lane. After a pallet has been retrieved from the lane, the next pallet will move unassisted to the picking face, allowing convenient order picking directly off the pallet.





Order picking of palletised loads


Pallet live storage


Retrofit your static pallet racking with flow levels!




Roller conveyor segments, full width rollers

- Ideal for floor level order picking
- The second pallet will move unassisted to the picking face
- 2700 mm wide bays accommodate 3 roller conveyor lanes for 800 mm wide pallets handled long side on
- 3300 mm wide bays accommodate 3 roller conveyor lanes for 1000 mm wide pallets handled long side on
- Galvanised rollers provide a clean and bright appearance





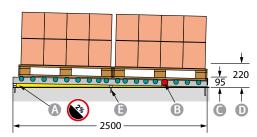


- A Auxiliary incline 2%
- B Braking roller
- Upper edge of roller track
- Required lift height
- Floor anchoring




Roller conveyor segments suited for hand pallet truck retrieval

- Ideal for loading and retrieving pallets with a hand pallet truck
- The second pallet will move unassisted to the picking face
- 2700 mm wide bays accommodate 3 roller conveyor lanes for 800 mm wide pallets handled long side on
- 3300 mm wide bays accommodate 3 roller conveyor lanes for 1000 mm wide pallets handled long side on
- Each segment has a robust frame to protect rollers and ensure a long service life
- Galvanised rollers provide a clean and bright appearance
- Segments are fixed with floor anchors



Suited for a pallet width of	Suited for a pallet length of	Suited for a pallet weight of	Roller pitch T	Ref. no.
mm	mm	kg	mm	
800	1200	1500	144	37-37811
1000	1200	1500	144	37-37812

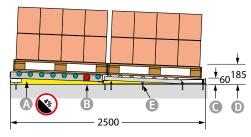

- A Auxiliary incline 4%
- B Braking roller
- Upper edge of roller track
- D Required lift height
- Floor anchoring

ORDER PICKING OF PALLETISED LOADS


Order picking of palletised loads



Roller track segments, with flanged plastic rollers


- Ideal for floor level order picking
- Floor level with roller tracks as budget solution
- The second pallet will move unassisted to the picking face
- Tracks are fitted with flanged rollers to prevent pallets from pulling sideways
- All segments are supplied with in-feed guides to make pallet in-feeding into the lane safer and more convenient
- 2700 mm wide bays accommodate 3 roller conveyor lanes for 800 mm wide pallets handled long side on
- 3300 mm wide bays accommodate 3 roller conveyor lanes for 1000 mm wide pallets handled long side on

Suited for a pallet width of	Suited for a pallet length of	Suited for a pallet weight of	Roller length	Roller pitch T	Ref. no.
mm	mm	kg	mm	mm	
800, 1000	1200	800	74	72	37-37810

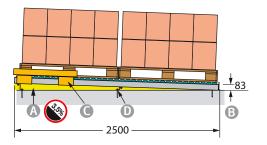

- Auxiliary incline 3,5%
- Upper edge of roller track
- In-feed guide
- Floor anchoring






Roller conveyor segments, two track option


- Ideal for floor level order picking
- The second pallet will move unassisted to the picking face
- 2700 mm wide bays accommodate 3 roller conveyor lanes for 800 mm wide pallets handled long side on
- 3300 mm wide bays accommodate 3 roller conveyor lanes for 1000 mm wide pallets handled long side on
- Galvanised rollers provide a clean and bright appearance


Suited for a pallet width of	Suited for a pallet length of	Suited for a pallet weight of	Roller length	Roller pitch T	Ref. no.
mm	mm	kg	mm	mm	
800, 1000	1200	1500	124	144	37-37813

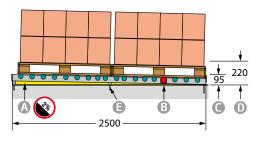

- A Auxiliary incline 2%
- Braking roller
- Upper edge of roller track
- Required lift height
- Floor anchoring









Order picking of palletised loads

Heavy duty roller tracks




- Solid steel axles firmly fit into rail notches
- For heavy-duty applications
- **Smooth roller operation**
- Made from robust material for a long service life
- Roller width 62 mm



- Roller track profiles galvanised
- Galvanised rollers with ball bearing


	Roller pitch T		96 mm	72 mm	48 mm
Load cap. per roller	Roller Ø	Length	Ref. no.	Ref. no.	Ref. no.
kg	mm	mm			
130	45 mm	2400	37-20175	37-20174	37-20173
		3600	37-20172	37-20171	37-20170



With cylindrical plastic rollers

- Roller track profiles galvanised
- Black PVC rollers with glide bearing

	Roller pitch T		96 mm	72 mm	48 mm
Load cap. per roller	Roller Ø	Length	Ref. no.	Ref. no.	Ref. no.
kg	mm	mm			
65	46 mm	2400	37-14175	37-14176	37-14177
		3600	37-14190	37-14191	37-14192



With flanged plastic rollers


- Roller track profiles galvanised
- Black PVC rollers with glide bearing


	Roller pitch T		96 mm	72 mm
Load cap. per roller	Roller Ø	Length	Ref. no.	Ref. no.
kg	mm	mm		
65	46 mm	2400	37-14180	37-14181
		3600	37-14195	37-14196

Accessories



with low stop plate





high stop plate



Pos.	Description	Ref. no.
A	Track end guard, with low stop plate, delivery includes bolts	37-22813
В	Track end guard, with high stop plate, delivery includes bolts	37-22814
C	Anchor bolts, M10-20 galvanised (pack of 10 pcs.)	66-3408

ORDER PICKING OF LIGHT AND MEDIUM-WEIGHT LOADS

Order picking of light and medium-weight loads

Roller tracks

for light weight and medium weight goods


Everything within easy reach!

- Robust plastic rollers
- Robust axles
- Roller track profiles galvanised
- Product sold by meter

With cylindrical plastic rollers

White plastic rollers


Roller length	Load cap. per roller	Roller Ø	Roller pitch T	Length	Ref. no.
mm	kg	mm	mm	mm	
24.5	4	26	28	2000	36-8598
				3000	36-8599



With cylindrical plastic rollers and steel axle

Plastic rollers are anthracite grey


Roller length	Load cap. per roller	Roller Ø	Roller pitch T	Length	Ref. no.
mm	kg	mm	mm	mm	
24.5	8	26	28	2000	36-27720
				3000	36-27721



With cylindrical plastic rollers (ESD version) and steel axles

- Cylindrical rollers from black plastic
- ESD version

Roller length	Load cap. per roller	Roller Ø	Roller pitch T	Length	Ref. no.
mm	kg	mm	mm	mm	
24.5	8	26	28	2000	36-27722
				3000	36-27723



With flanged plastic rollers

White plastic rollers

Roller length	Load cap. per roller	Roller Ø	Roller pitch T	Length	Ref. no.
mm	kg	mm	mm	mm	
24.5	24.5 4 26 42	42	2000	36-8622	
				3000	36-8623





Carton live storage

Everything within easy reach!

Efficiency in any modern warehouse and logistics centre is largely determined by the choice of the right order picking system to ensure optimum order throughput. We at BITO offer you expert know-how and long-standing experience in planning and manufacturing customised order picking systems. The following pages present some easy-to-realise solutions for your warehouse.

Carton live storage accommodates smaller sized storage units such as plastic bins and containers, cartons or individual items without packaging. All goods are loaded at the rear of a storage installation and move gravity-driven on inclined roller lanes to the picking face where they can be picked to requirement.

Product storage in FIFO (First in - First out) order as well as single reference lines allow easy monitoring of production batches and sell-by dates.

Please note: This racking system has been designed for in-door use only. The indicated load capacities are not valid for earthquake hazard zones. If your storage and order picking facility is intended for use in a seismic hazard zone, please inform BITO in advance!








Smart ideas to boost picking performance

First in — first out

Items stored first are retrieved first

- Easy monitoring of sell-by dates and production batches
- Ergonomic picking curve
- All reference lines on stock can be viewed immediately
- Stock items are always available at the picking side
- Items move unassisted to the picking face





Very good floor space utilisation

- Substantial gain in floor space unused floor space is considerably reduced
- Separate picking and loading aisles operators do not disturb each other
- Shorter travel routes for order pickers

Substantially reduced travel times

- Reading time (1) remains the same as with conventional floor space occupation
- Picking time (2) remains the same as with conventional floor space occupation
- Travel time (3) is cut down by as much as two-thirds – increased turnover frequency

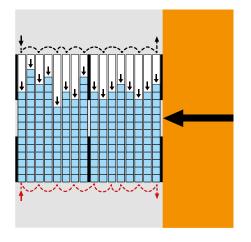





Roller tracks

for light weight and medium weight goods

Everything within easy reach!


- Robust plastic rollers
- Robust axles
- Roller track profiles galvanised
- Product sold by meter





White plastic rollers


Roller length	Load cap. per roller	Roller Ø	Roller pitch T	Length	Ref. no.
mm	kg	mm	mm	mm	
24.5	4	26	28	2000	36-8598
				3000	36-8599



With cylindrical plastic rollers and steel axle

Plastic rollers are anthracite grey


Roller length	Load cap. per roller	Roller Ø	Roller pitch T	Length	Ref. no.
mm	kg	mm	mm	mm	
24.5	8	26	28	2000	36-27720
				3000	36-27721



With cylindrical plastic rollers (ESD version) and steel axles

- Cylindrical rollers from black plastic
- ESD version

Roller length	Load cap. per roller	Roller Ø	Roller pitch T	Length	Ref. no.
mm	kg	mm	mm	mm	
24.5	8	26	28	2000	36-27722
				3000	36-27723



With flanged plastic rollers

White plastic rollers

Roller length	Load cap. per roller	Roller Ø	Roller pitch T	Length	Ref. no.
mm	kg	mm	mm	mm	
24.5	4	26	42	2000	36-8622
				3000	36-8623






With flanged plastic rollers / ESD version

- Flanged rollers from black plastic
- ESD version

Roller length	Load cap. per roller	Roller Ø	Roller pitch T	Length	Ref. no.
mm	kg	mm	mm	mm	
24.5	4	26	42	2000	36-30658
				3000	36-30659

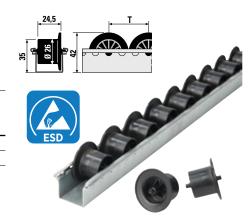

Accessories











A Brake clips



Brake rollers

D Brake shoes







Roller track connectors

Protective caps

G Push-back protection

Pos.	Description		Ref. no.	
A	Brake clips	reliable flow speed regulation, avoids product damage due to abrupt stopping at the picking face, exerts a slight braking effect by blocking some rollers, ideal for lanes accommodating loads that differ a lot in weight, ideal for pressure sensitive products	36-7294	
В	Roller track braces	prevents that roller track sides are bent open, required if heavy goods are loaded or in case of rough in-feeding of storage units at the loading side	36-16906	
C	Brake rollers	optimum travel characteristics even if bins and cartons with a very different weight are fed into the same lane, allow to realise long lanes or lanes with a higher angle of incline, pressure-sensitive goods are smoothly braked, in general, a 6% incline is recommended for carton live storage levels, mounted in pairs at spacing intervals adapted to the length of loads (measured in travel direction), for maximum loads of 30 kg per storage unit, to be fitted into roller tracks by customer	36-29940	
D	Brake shoes	suited for applications that need a higher braking force, this 275 mm long steel bracket is clipped on a series of rollers, provides a much stronger braking effect than a braking clip	36-7293	
B	Roller track connectors	allows durable and safe joining of roller track lengths, allows end-to-end joining to make long lanes, 3 distance holders prevent that roller track sides are pressed inwards at joining points, delivery includes fixing material + roller axles	36-11244	
G	Protective caps	prevent injuries from roller tracks standing out at the front or the rear side of a flow shelf	36-28535	
G	Push-back protection	prevents loads from dropping at the loading side if pushed back unintentionally, supplied with steel axle, mainly used at the loading side, tilting forward when goods move to the picking side, prevents that storage units move backwards when accidentally pushed against the flow direction	36-27011	



Carton live storage Flex

Robust make to suit all types of unit loads

- Fast and easy order picking, short delivery times
- Modular system racking bays and flow shelves can be added at any time
- Inclined position of bins provides a better view and allows faster and ergonomic picking
- Solid construction stands up to heavy loads
- Flow level spacing and incline can be adjusted as required





Racking depth 1300 mm, useable depth 1200 mm

- Racking height 2500 mm: 3 straight levels, 2 inclined levels
- Starter bays: 1 starter bay per racking row required. Bay width 2700 mm, total bay width 2820 mm.
- Extension bays: bay widths from 1350 mm to 2.700 mm





Assembly service

For your convenience, each delivery comes with instructions for assembly and use for quick and easy installation. All assembly steps and directions of use are illustrated in detail. Upon request we are pleased to submit an offer for on-site installation by our experienced assembly teams.



Description	escription Bay width Total wi		Accommodates x containers 400 x 300 mm	Accommodates x containers 600 x 400 mm	Load cap. Bay load per level		Ref. no.
	mm	mm	Pcs	Pcs	kg	kg	
Starter bay	2700	2820	120	60	460	2300	36-44665
Extension bay	1350	1410	60	30	450	2250	36-44666
	1800	1860	80	40	420	2100	36-44667
	2200	2260	100	50	400	2000	36-44668
	2700	2760	120	60	460	2300	36-44669

Racking depth 2500 mm, useable depth 2400 mm





i BITO info

Assembly service

For your convenience, each delivery comes with instructions for assembly and use for quick and easy installation. All assembly steps and directions of use are illustrated in detail. Upon request we are pleased to submit an offer for on-site installation by our experienced assembly teams.



Description	escription Bay width To		Accommodates x containers 400 x 300 mm	Accommodates x containers 600 x 400 mm	Load cap. per level	Bay load	Ref. no.
	mm	mm	Pcs	Pcs	kg	kg	
Starter bay	2700	2820	240	120	480	2400	36-44660
Extension bay	1350	1410	120	60	450	2250	36-44661
	1800	1860	160	80	450	2250	36-44662
	2200	2260	200	100	450	2250	36-44663
	2700	2760	240	120	480	2400	36-44664



Carton live storage Flex - Set offer

non-mobile version

Make sure that supplies don't run out ... and avoid down time!

- Ergonomic supply of parts and components at workstations
- 3 feeder levels equipped with 3 lanes each, i.e. 6 roller tracks and 2 dividers per level
- 1 return level (always supplied as straight level) with 8 roller tracks
- Maximum load capacity per level 250 kg
- Galvanised finish, epoxy-coated components in gentian blue, RAL 5010
- Supplied unassembled



Bin capacity per supply shelving unit

36 European size stacking containers XL with L x W x H: 400 x 300 x 220 mm blue: 43-18520 / red: 43-14507

OF

18 European size stacking containers XL with L x W x H: 600 x 400 x 270 mm blue: 43-18492 / red: 43-14511

Assembly service

For your convenience, each delivery comes with instructions for assembly and use for quick and easy installation. All assembly steps and directions of use are illustrated in detail. Upon request we are pleased to submit an offer for on-site installation by our experienced assembly teams.



non-mobile version, straight feeder levels 36-46050

non-mobile version, feeder levels with cranked picking face 36-46051

•	Number of levels	External bay width	Bay width		Useable depth	Description	Ref. no.
mm		mm	mm	mm	mm		
2000	4	1470	1350	1300	1200	non-mobile version, straight feeder levels	36-46050
						non-mobile version, feeder levels with cranked picking face	36-46051

Accessories



ing containers XL

Pos.	Description	External dimensions L x W x H	Colour	Ref. no.
		mm		
A	European size stacking	400 x 300 x 220	blue	43-18520
•	containers XL		red	43-14507
		600 x 400 x 270	blue	43-18492
			red	43-14511



Carton live storage Flex - Set offer

mobile version

Make sure that supplies don't run out ... and avoid down time!

- Ergonomic and mobile supply of parts and components at workstations
- 3 feeder levels equipped with 3 lanes each, i.e. 6 roller tracks and 2 dividers per level
- 1 return level (always supplied as straight level) with 8 roller tracks
- Maximum load capacity per level 250 kg
- Galvanised finish, epoxy-coated components in gentian blue, RAL 5010
- Supplied unassembled



Bin capacity per supply shelving unit

36 European size stacking containers XL with L x W x H: 400 x 300 x 220 mm blue: 43-18520 / red: 43-14507

18 European size stacking containers XL with L x W x H: $600 \times 400 \times 270 \text{ mm}$ blue: 43-18492 / red: 43-14511

Assembly service

For your convenience, each delivery comes with instructions for assembly and use for quick and easy installation. All assembly steps and directions of use are illustrated in detail. Upon request we are pleased to submit an offer for on-site installation by our experienced assembly teams.



mobile version, straight feeder levels 36-46052

mobile version, feeder levels with cranked picking face 36-46053

height	Number of levels	bay width	Bay width	bay depth	depth	Description	Ref. no.
mm		mm	mm	mm	mm		
2000	4	1470	1350	1300	1200	mobile version, feeder levels with cranked picking face	36-46053
						mobile version, straight feeder levels	36-46052

Pos.	Description	External dimensions L x W x H	Colour	Ref. no.
		mm		
A	A European size stacking	400 x 300 x 220	blue	43-18520
	containers XL		red	43-14507
		600 x 400 x 270	blue	43-18492
			red	43-14511

Accessories



European size stacking containers XL



Complete levels

with roller tracks

Clear the way for your products!

- For retro-fitting into existing pallet racking
- Roller tracks are installed with a standard spacing of approximately 100 mm and are equipped with cylindrical plastic rollers with a pitch of 28 mm
- Suited for multi-size cartons and bins
- Suited for cartons and bins weighing up to 20 kg
- For use with 50 mm wide beams
- Modules can be removed at any time to restore the original state as static pallet racking and can be re-used when and where required
- Convenient drop-on fitting of preassembled modules on existing beams



i BITO info

Please check the clear width (= useful depth) between front and rear beams of your pallet racking!

Bay width	Number of modules	External bay depth	Useable depth	Shelf load	Ref. no.
mm		mm	mm	kg	
2700	8	1100	1000	480	36-28868
		2400	2300	960	36-28400
		2450	2350	960	36-28401
3600	11	1100	1000	660	36-28869
		2400	2300	960	36-28402
		2450	2350	960	36-28403

Accessories







A Individual modules

B Universal lane dividers

Brake rollers

Pos.	Description		Module width	External bay depth	Useable depth	Load capacity per segment	Ref. no.
			mm	mm	mm	kg	
A	Individual modules	for easy-to-realise modifications and add-ons	322	1100	1000	60	36-28864
			322	2400	2300	120	36-28595
			322 2450	2350	120	36-28596	
B	Universal lane	fast and convenient subdivision into lanes, re-adjustment of lane	- 1100 -	-	36-28858		
	dividers	width is possible whenever required	-	2400	-	-	36-28406
			-	2450	-	-	36-28407
G	Brake rollers		-	-	-	-	36-29940



Complete levels

with roller conveyors

Make your stock move!

- For retro-fitting into existing pallet racking
- Ideal for storage units with difficult travel characteristics
- Suited for loads of up to 30 kg
- Galvanised rollers, diameter 25 mm, roller pitch 84 mm
- For use with 50 mm wide beams
- Modules can be removed at any time to restore the original state as static pallet racking and can be re-used when and where required
- Convenient drop-on fitting of preassembled modules on existing beams



i BITO info

Please check the clear width (= useful depth) between front and rear beams of your pallet racking!

For a bay width of	Number of modules	External bay depth	Useable depth	Shelf load	Ref. no.
mm		mm	mm	kg	
2700	6	1100	1100	480	36-54900
		2400	2300	960	36-28408
		2450	2350	960	36-28409
3600	8	1100	1100	640	36-54901
		2400	2300	1280	36-28410
		2450	2350	1280	36-28411

Accessories



A Individual modules

Pos.			Module width	External bay depth		Load capacity per segment	Ref. no.
			mm	mm	mm	kg	
A	Individual modules	for easy-to-realise modifications and add-ons	446	1100	1000	80	36-39360
			446	2400	2300	160	36-28597
			446	2450	2350	160	36-28598

Cantilever racking for light duty applications

Cantilever racking for long loads – boltless assembly

Loads such as bars, tubes and pipes, sheet material, coils, offcuts and goods to be stored vertically – in short long and bulky items – have special storage requirements. For all these applications, BITO cantilever racking is the ideal storage system.

Whatever configuration or racking type is required – for single sided or double sided use, for rigid or flexible loads, bulky goods, coils or vertical storage - our experienced sales team will be pleased to advise you on the right racking type for your needs.

Cantilever arms and shelf levels can be adjusted in height without bolts. BITO cantilever racking can be supplied with a

height up to 3700 mm, useful depths range from 400 to 850 mm.

Please note: Racking finishes supplied are intended for indoor use only!






All shelving and racking components fully comply with the latest German and international health and safety regulations (EN 15512 / DGUV 108-007).







- A Useful depth
- B Depth of column feet
- CTC-distance
- Support rail for tubular arms
- Tubular arm
- Steel shelf
- Base shelf
- Column foot with end stop
- 6 Cross bracing
- Cantilever arm with end stop
- Column (double sided)
- Connector

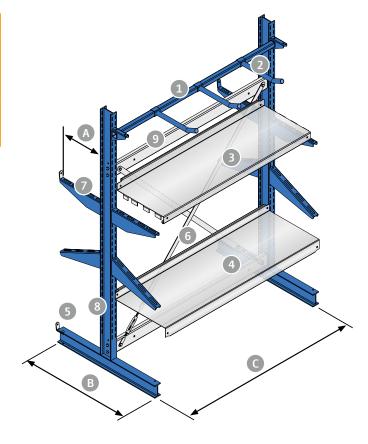



Cantilever racking type L


with tubular arms

Perfect racking system for coils, cable dispensers and long items

- Load capacity per tubular arm 60 kg
- Tubular arms are adjustable without bolts in 60 mm increments along the column height
- Columns, tubular arms and support rails for tubular arms are epoxy-coated in gentian blue RAL 5010, all other components are galvanised
- Columns are made from European I-beams type







RAL 5010 Gentian blue Ref. no. 20-18043









					Shelving type	Starter bay	Extension bay
Shelving height		Description	Number of round cantilever arms	External bay depth	Useable depth	Ref. no.	Ref. no.
mm				mm	mm		
1980		with tubular arms single sided use	12	500	400	20-18043	20-18044
	#	with tubular arms double sided use	24	1100	2 x 400	20-18045	20-18046

Accessories







Pos.	Description		For a shelving depth of	Load capacity	Ref. no.
			mm	kg	
A	Tubular cantilever arms	can be positioned anywhere along the support rail, epoxy-coated in gentian blue, RAL 5010	400	60	20-18094
B		for tubular arms, useable racking depth ranges from 500 to 850 mm, epoxy-coated in gentian blue, RAL 5010	-	180	20-18093



Cantilever racking type L

single sided use

Cantilever racking for long loads - boltless assembly

- Load cap. per level: max. 1320 kg
- Total load capacity: max. 7920 kg
- Height adjustable on a 60 mm pitch
- Cantilever arms and column feet are supplied with a 60 mm high end stop
- Columns are made from European I-beams type **IPE 100/120**
- Columns and tubular arms are epoxy-coated in gentian blue RAL 5010, all other components are galvanised



Our offer:

Distance between column centres 1251 mm

H x W x D (racking depth): 1980 x 5060 x 600 mm Number of arms per column: 3 RAL 5010 Gentian blue Ref. no. 20-17968





Distance between centre lines 1061 mm

Accessories to match from page 218

Distance between centre lines	Shelving height	Number of arms per column	External bay width	Number of columns	Useable depth	External bay depth	Load cap. per level	Total load capacity	Ref. no.
mm	mm		mm		mm	mm	kg	kg	
1061	1980	4	3235	4	400	500	880	4400	20-17885
	<u> 5</u>				500	600	700	3500	20-17886
	3 2 1				600	700	560	2800	20-17887
	3		4295	5	400	500	1100	5500	20-17888
	2				500	600	875	4375	20-17889
					600	700	700	3500	20-17890
			5356	6	400	500	1320	6600	20-17891
	IPE 100				500	600	1050	5250	20-17892
					600	700	840	4200	20-17893
	2480	5	3245	4	400	520	880	5280	20-17894
					500	620	700	4200	20-17895
	5				600	720	560	3360	20-17896
	3	4305 5 4305 5 5366 6	4305	5	400	520	1100	6600	20-17897
				500	620	875	5280	20-17898	
	2				600	720	700	4200	20-17899
			5366	6	400	520	1320	7920	20-17900
				500	620	1050	6300	20-17901	
	IPE 120				600	720	840	5040	20-17902

Cantilever racking type L

double sided use

Plenty of room for long loads

- Load cap. per level: max. 1320 kg
- Total load capacity: max. 15840 kg
- Height adjustable on a 60 mm pitch
- Cantilever arms and column feet are supplied with a 60 mm high end stop
- Columns are made from European I-beams type IPE 100/120
- Columns and tubular arms are epoxy-coated in gentian blue RAL 5010, all other components are galvanised



Optionally:

Distance between column centres 1251 mm

H x W x D (racking depth): 1980 x 5060 x 1100 mm Number of arms per column: 6 RAL 5010 Gentian blue Ref. no. 20-17884







Distance between centre lines 1061 mm

•
Accessories to match from page 218

Distance between centre lines	Shelving height	Number of arms per column	External bay width	Number of columns	Useable depth	External bay depth	Load cap. per level	Total load capacity	Ref. no.
mm	mm		mm		mm	mm	kg	kg	
1061	1980	8	3235	2	2 x 400	900	880	8800	20-17903
	<u>9 10</u>				2 x 500	1100	700	7000	20-17904
	7 8				2 x 600	1300	560	5600	20-17905
	5 6	•	4295	5	2 x 400	900	1100	11000	20-17906
	3 4 1 2				2 x 500	1100	875	8750	20-17907
					2 x 600	1300	700	7000	20-17908
			5356	6	2 x 400	900	1320	13200	20-17909
	IPE 100				2 x 500	1100	1050	10500	20-17910
					2 x 600	1300	840	8400	20-17911
248	2480 11 _ 12	11 - 12	3245	4	2 x 400	920	880	10560	20-17912
					2 x 500	1120	700	8400	20-17913
	9 10				2 x 600	1320	560	6720	20-17914
	7 8		4305	5	2 x 400	920	1100	13200	20-17915
	5 6				2 x 500	1120	875	10500	20-17916
	3 4				2 x 600	1320	700	8400	20-17917
	1 2		5356	6	2 x 400	920	1320	15840	20-17918
		•			2 x 500	1120	1050	12600	20-17919
	IPE 120				2 x 600	1320	840	10080	20-17920



Cantilever racking type S

single sided use

Cantilever racking for very heavy long loads - boltless assembly

- Load cap. per level: max. 2880 kg Total load capacity: max. 17280 kg
- Columns and tubular arms are epoxy-coated in gentian blue RAL 5010, all other components are galvanised
- Height adjustable on a 60 mm
- Columns are made from **European I-beams type IPE 140**



Our offer:

Distance between column centres

1251 mm, useful depth 600 mm (We do not offer shelves for cantilever arms and for column feet in cantilever racking with a CTC-distance of 1251 mm.)

Accessories to match from page 218

H x W x D (racking depth): 2500 x 5080 x 740 mm RAL 5010 Gentian blue





1251 mm

Distance between centre lines 1061 mm

Shelving height	Number of arms per column	Distance between centre lines	External bay width	Number of columns	Useable depth	External bay depth	Load cap. per level	Total load capacity	Ref. no.
mm		mm	mm		mm	mm	kg	kg	
2500 6	5	1061	3255	4	400	540	1920	11520	20-17971
					500	640	1640	9840	20-17972
5 4					600	740	1320	7920	20-17973
4	>				850	990	1080	6480	20-17974
3			4316	5	400	540	2400	14400	20-17975
2				500 640 2050	2050	12300	20-17976		
1					600	740	1650	9900	20-17977
				850 990 1350	1350	8100	20-17978		
IPE 14	40		5376	6	400 540 2880	2880	17280	20-17979	
					500	640	2460	14760	20-17980
					600	740	1980	11850	20-17981
					850	990	1620	9720	20-17982
		1251	2576 3	3	400	540	1440	8640	20-17995
					500	640	1230	7380	20-17996
					600	740	990	5940	20-17997
					850	990	810	4860	20-17998
			3828	4	400	540	1920	11520	20-17999
					500	640	1640	9840	20-18000
					600	740	1320	7920	20-18001
					850	990	1080	6480	20-18002
			5080	5	400	540	2400	14400	20-18003
					500	640	2050	12300	20-18004
					600	740	1650	9900	20-18005
					850	990	1350	8100	20-18006




Cantilever racking type S

double sided use

Ideal for accommodating heavy weight and long loads

- Load cap. per level: max. 2880 kg
- Total load capacity: max. 34560 kg
- Columns and tubular arms are epoxy-coated in gentian blue RAL 5010, all other components are galvanised
- Height adjustable on a 60 mm pitch
- Columns are made from European I-beams type IPE 140



Distance between column centres 1251 mm, useful depth 600 mm

(We do not offer shelves for cantilever arms and for column feet in cantilever racking with a CTC-distance of 1251 mm.)


H x W x D (racking depth): 2500 x 5080 x 1340 mm

RAL 5010 Gentian blue

Ref. no. 20-17970



Accessories to match from page 218

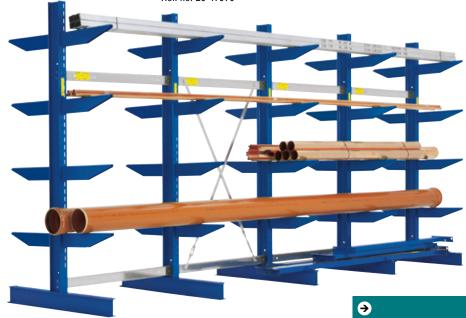



Distance between centre lines

1061 mm 1251 mm

Shelving height	Number of arms per column	Distance between centre lines	External bay width	Number of columns	Useable depth	External bay depth	Load cap. per level	Total load capacity	Ref. no.
mm		mm	mm		mm	mm	kg	kg	
2500	10	1061	3255	4	2 x 400	940	1920	23040	20-17983
	12		4316	5	2 x 400	940	2400	28800	20-17987
	10		5376	6	2 x 400	940	2880	34560	20-17991
7			3255	4	2 x 500	1140	1640	19680	20-17984
	6				2 x 600	1340	1320	15840	20-17985
3	4				2 x 850	1840	1080	12960	20-17986
1 2 IPE 140	2		4316	5	2 x 500	1140	2050	24600	20-17988
	E 140				2 x 600	1340	1650	19800	20-17989
					2 x 850 1840	1840	1350	16200	20-17990
			5376	6	2 x 500	1140	2460	29520	20-17992
					2 x 600	1340	1980	23760	20-17993
					2 x 850	1840	1620	19440	20-17994
		1251	2576	3	2 x 400	940	1440	17280	20-18007
			3828	4	2 x 400	940	1920	23040	20-18011
			5080	5	2 x 400	940	2400	28800	20-18015
			2576	3	2 x 500	1140	1230	14760	20-18008
					2 x 600	1340	990	11880	20-18009
					2 x 850	1840	810	9720	20-17987 20-17991 20-17984 20-17985 20-17986 20-17988 20-17989 20-17990 20-17992 20-17993 20-17994 20-18007 20-18011 20-18008
			3828	4	2 x 500	1140	1640	19680	20-18012
					2 x 600	1340	1320	15840	20-17983 20-17987 20-17991 20-17984 20-17985 20-17986 20-17989 20-17990 20-17992 20-17994 20-18007 20-18015 20-18015 20-18009 20-18010 20-18010 20-18010 20-18010 20-18010 20-18010 20-18010 20-18010 20-18010 20-18010 20-18010 20-18010 20-18010 20-18010 20-18010
					2 x 850	1840	1080	12960	20-18014
			5080	5	2 x 500	1140	2050	24600	20-18016
					2 x 600	1340	1650	19800	20-18017
				2 x 850	1840	1350	16200	20-18018	



Cantilever racking components type L and S



Cantilever racking columns, single sided use

- All columns are supplied with floor anchors, shims and bolts for connector beams
- Epoxy-coated in gentian blue, RAL 5010

Description	Profile type	Height	Useable depth	Load capacity	Ref. no.
		mm	mm	kg	
type L	IPE 100	1980	400	1000	20-18050
			500	850	20-18051
			600	725	20-18052
	IPE 120	2480	400	1400	20-18056
			500	1225	20-18057
			600	1075	20-18058
type S	IPE 140	2500	400	2400	20-18062
			500	2050	20-18063
			600	1775	20-18064
			850	1350	20-18065
		3220	400	2225	20-18070
			500	1850	20-18071
			600	1600	20-18072
			850	1150	20-18073
		3700	400	1900	20-18078
			500	1600	20-18079
			600	1375	20-18080
			850	1000	20-18081

Cantilever racking columns, double sided use


- All columns are supplied with floor anchors, shims and bolts for connector beams
- Epoxy-coated in gentian blue, RAL 5010

Description	Profile type	Height	Useable depth	Load capacity	Ref. no.
		mm	mm	kg	
type L	IPE 100	1980	2 x 400	2000	20-18053
			2 x 500	1700	20-18054
			2 x 600	1450	20-18055
	IPE 120	2480	2 x 400	2800	20-18059
			2 x 500	2450	20-18060
			2 x 600	2150	20-18061
type S	IPE 140	2500	2 x 400	4800	20-18066
			2 x 500	4100	20-18067
			2 x 600	3550	20-18068
			2 x 850	2700	20-18069
		3220	2 x 400	4450	20-18074
			2 x 500	3700	20-18075
			2 x 600	3200	20-18076
			2 x 850	2300	20-18077
		3700	2 x 400	3800	20-18082
			2 x 500	3200	20-18083
			2 x 600	2750	20-18084
			2 x 850	2000	20-18085





Accessories

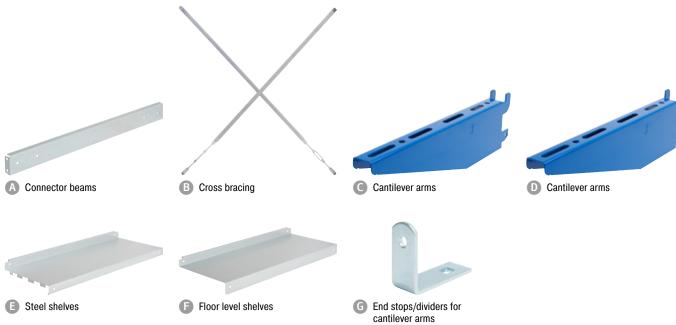

Pos.	Description		For a shelving depth of	Load capacity	Dimensions	Ref. no.
			mm	kg	mm	
A	Connector	to suit type L and S, galvanised, 2 connector beams are required per bay,	-	-	L 1057	20-11991
	beams	3 beams for racking heights of 3 metres and higher, bolts are supplied together with column delivery	-	-	L 1247	20-11990
В	Cross bracing	to suit type L and S, galvanised, 1 cross bracing set required for every 5th bay in a row, supplied with bolts	-	-	L 1650	20-2274
G	Cantilever	type L, incl. safety pin, height adjustable on a 60 mm pitch, hook-in mount-	400	220	L 400	20-18086
	arms ing, ep	ing, epoxy-coated in gentian blue, RAL 5010	500	175	L 500	20-18087
			600	140	L 600	20-18088
D		type S, incl. safety pin, height adjustable on a 60 mm pitch, hook-in mount-	400	550	L 400	20-18089
		ing, epoxy-coated in gentian blue, RAL 5010	500	430	L 500	20-18090
			600	330	L 600	20-18091
			850	300	L 850	20-18092
B	Steel shelves	galvanised, drop-on fitting onto cantilever arms, shelf length 1057 mm to fit a	400	360	L 1057	20-2799
		distance of 1061 mm between column centre lines, please mind load capac-	500	360	L 1057	20-2800
		ity of cantilever arms!, not available for a clear depth of 850 mm and for a distance of 1251 mm between column centres	600	330	L 1057	20-2801
ß	Floor level	galvanised, drop-on fitting onto column feet, shelf length 1057 mm to fit a	400	460	L 1057	20-2277
	shelves	distance of 1061 mm between column centre lines, please mind load capac-	500	420	L 1057	20-2278
		ity of cantilever arms!, not available for a clear depth of 850 mm and for a distance of 1251 mm between column centres	600	370	L 1057	20-2279
G	End stops/	for column feet, galvanised, incl. bolts	-	-	L 76 x W 30 x H 60	20-18665
	dividers for	supplied with bolts, for cantilever arms, height 60 mm, galvanised, incl. bolts	-	-	L 76 x W 30 x H 60	20-2275
	cantilever arms	for column feet, galvanised, incl. bolts	-	-	L 76 x W 30 x H 150	20-18666
		for cantilever arms, galvanised, incl. bolts	-	-	L 76 x W 30 x H 150	20-2276



Racks for vertical storage

single sided use

- Space saving vertical storage of light weight, long loads such profiles, tubes, sheet material
- Optionally available dividers allow neat storage of long loads and facilitate access to products
- Sturdy construction consisting of a bolted frame with hook-in beams and a galvanised tray shelf. Beams can be adjusted in height on a 50 mm pitch
- Easy hook-in / bolt-on fitting: beams are hooked into pre-assembled frame, tray shelf must be bolted to frame feet
- Frames are powder coated in gentian blue RAL 5010, horizontal and diagonal strutting galvanised
- Beams are epoxy-coated in light grey RAL 7035, with welded-on connectors
- Delivery includes floor fixing material







Height	Useable width	Useable depth	Total bay load capacity	Total width	External bay depth	Description	Ref. no.
mm	mm	mm	kg	mm	mm		
2500	1500	340	130	1600	600	Starter bay	58-48110
				1550	600	Extension bay	58-48111
		500	110	1600	760	Starter bay	58-48114
				1550	760	Extension bay	58-48115
	1800	340	130	1900	600	Starter bay	58-48112
				1850	600	Extension bay	58-48113
		500	110	1900	760	Starter bay	58-48116
				1850	760	Extension bay	58-48117

Racks for vertical storage



Racks for vertical storage double sided use



Height	Useable width	Useable depth	Total bay load capacity	Total width	External bay depth	Description	Ref. no.
mm	mm	mm	kg	mm	mm		
2500	1500	2 x 340	130	1600	1200	Starter bay	58-48118
				1550	1200	Extension bay	58-48119
		2 x 500	110	1600	1520	Starter bay	58-48122
				1550	1520	Extension bay	58-48123
	1800	2 x 340	130	1900	1200	Starter bay	58-48120
				1850	1200	Extension bay	58-48121
		2 x 500	110	1900	1520	Starter bay	58-48124
				1850	1520	Extension bay	58-48125

Accessories







A Wire divider with label holder

B Divider bars

Vertical wire divider

Pos.	Description		Useable depth	Description	Ref. no.
			mm		
A	Wire divider with	wire construction, wire diameter 6 mm, with welded	500	left end	58-48140
	label holder	connectors for easy hook-in-fitting to frame, epoxy-	500	divider arm for further subdivision	58-48139
		coated in light grey, RAL 7035	500	right end	58-48138
		350	left end	58-48137	
			350	divider arm for further subdivision	58-48136
			350	right end	58-48135
В	Divider bars	profile 35 x 20 mm, with welded connectors for easy	500	left end	58-48134
		hook-in-fitting to frame, epoxy-coated in light grey,	500	divider arm for further subdivision	58-48133
		RAL 7035	500	right end	58-48132
			350	left end	58-48131
			350	divider arm for further subdivision	58-48130
			350	right end	58-48129
C	Vertical wire	steel tube Ø 20 mm, with welded connectors for	500	left end	58-48128
	divider	easy hook-in-fitting to frame, epoxy-coated in light	500	divider arm for further subdivision	58-48127
		grey, RAL 7035	500	right end	58-48126







Cantilever racking for heavy duty applications


Bolted racking for very heavy long loads

All components of our heavy duty cantilever racking come in standardised dimensions and can be combined to suit your needs. This means that you can tailor your racking to adapt to the features of your storage location (indoor or outdoor) as well as to the size and the weight of your goods. Your cantilever racking can also be integrated into existing storage concepts.

If you prefer to let us do the planning, we are pleased to work out custom offers. Let us provide you with the right cantilever racking system for your application!


We deliver superior quality:

- for indoor use, components are painted and for outdoor use, they are hot-dip galvanised.
- Stiffening and connecting components are galvanised in compliance with EN 10326.
- Cantilever arms can be adjusted in height on a 100 mm pitch.
- Cantilever racking can be supplied for single sided and double sided use.

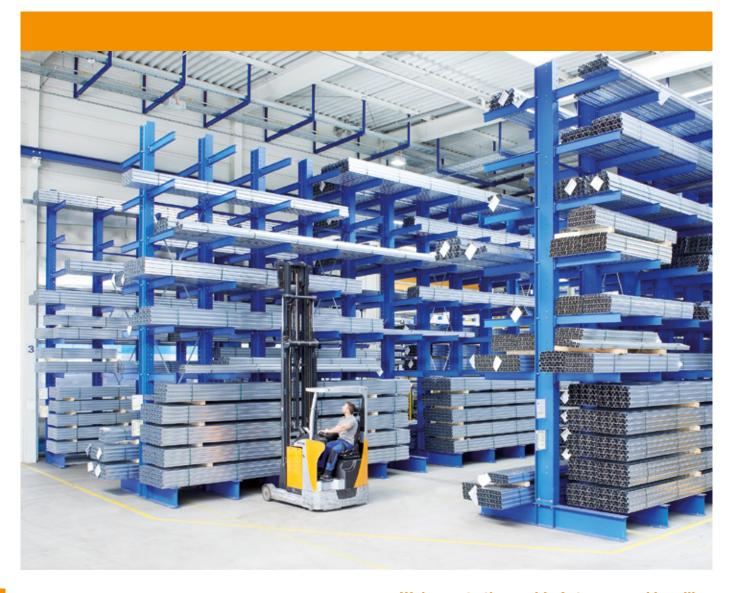





- 1 Column
- Cantilever arm
- Connector beam
- 4 Cross bracing
- Arm bridge

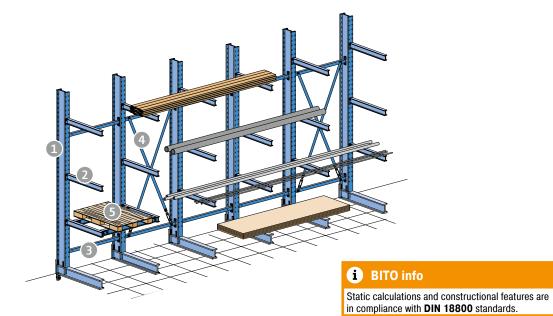

Components





Frames

- Columns and feet are supplied for self assembly (bolt-together construction)
- Columns and feet are manufactured from hot-rolled IPE profiles
- Delivery includes floor anchors
- Columns and feet can be supplied for single sided and for double sided use



Cantilever arms

- All cantilever arms are supplied with an end stop as standard
- The tapered side is pre-drilled for end stop fixing




Connector beams

- Connect columns with each other to make a solid racking row
- Take the cross bracing sets



Cross bracing

- Provide lateral racking stability
- Quantity and arrangement per racking row is project related



Arm bridges

Bolted construction for pallet storage



Shelves

 Supplied as wire-mesh shelves or as chipboard shelves depending on items to be stored



Cantilever racking type ES

single sided use

Complete cantilever racking units for extremely heavy loads

- Load cap. per level: max. 1800 kg
- Total load capacity: max. 12600 kg
- Cantilever arms are adjustable on a 100 mm pitch
- Columns are made from European I-beams type IPE 180/200
- Columns and cantilever arms are epoxy-coated in gentian blue RAL 5010,

all other components are galvanised

Cantilever arms from IPE 80 profiles




Our offer:

Distance between centre lines: 1500 mm H x W x D (racking depth): 3000 x 4600 x 1180 mm RAL 5010 Gentian blue Ref. no. 21-37512



Distance between centre lines 1500 mm

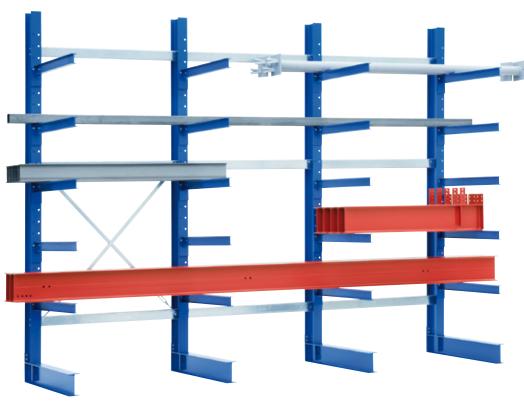

Distance between centre lines	Shelving height	Number of arms per column	External bay width	Number of columns	Useable depth	External bay depth	Load cap. per level	Total load capacity	Ref. no.
mm	mm		mm		mm	mm	kg	kg	
1500	3000 🕳 6	5	1600	2	1000	1180	900	5400	21-37510
	5		3100	3	1000	1180	1350	8100	21-37511
	3000 6 5 4 3 2 1 IPE 180		4600	4	1000	1180	1800	10800	21-37512
	4000 6	1600	2	1000	1200	900	6300	21-37515	
	6		3100	3	1000	1200	1350	9450	21-37513
	6 5 4 3 2 1		4600	4	1000	1200	1800	12600	21-37514

BITO

Cantilever racking type ES

double sided use

Complete cantilever racking units for extremely heavy loads

- Load cap. per level: max. 1800 kg
- Total load capacity: max. 25200 kg
- Cantilever arms are adjustable on a 100 mm pitch
- Columns are made from European I-beams type IPE 180/200
- Columns and cantilever arms are epoxy-coated in gentian blue RAL 5010, all other components are galvanised
- Cantilever arms from IPE 80 profiles




Distance between centre lines: 1500 mm
H x W x D (racking depth):

3000 x 4600 x 2180 mm RAL 5010 Gentian blue Ref. no. 21-37518





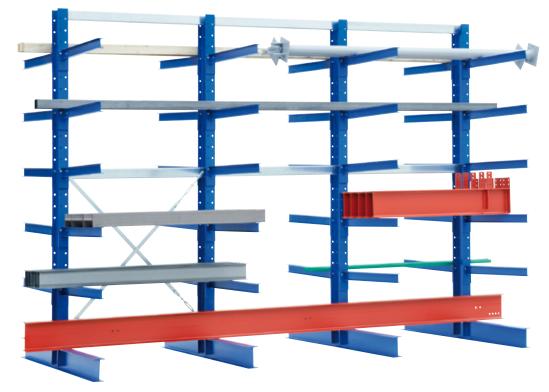



Distance between centre lines	Shelving height	Number of arms per column	External bay width	Number of columns	Useable depth	External bay depth	Load cap. per level	Total load capacity	Ref. no.
mm	mm		mm		mm	mm	kg	kg	
500	³⁰⁰⁰ <u>11 ■ 12</u>	10	1600	2	2 x 1000	2180	900	10800	21-37516
	9 10		3100	3	2 x 1000	2180	1350	16200	21-37517
	7 8 5 6 3 4 1 2 IPE 180		4600	4	2 x 1000	2180	1800	21600	21-37518
	4000	12	1600	2	2 x 1000	2200	900	12600	21-37521
	13 14		3100	3	2 x 1000	2200	1350	18900	21-37519
	11 12 9 10 7 8 5 6 3 4 1 2	i	4600	4	2 x 1000	2200	1800	25200	21-37520

Cantilever racking components type ES





- Column profiles IPE 180 300 and column heights of 3000, 4000 and 5000 mm allow maximum flexibility in use
- All columns are supplied with floor anchors and shims
- Painted in gentian blue, RAL 5010

Height	Useable depth	Load capacity	Profile type	Ref. no.
mm	mm	kg		
3000	1000	2750	IPE 180	21-37522
	1250	3200	IPE 200	21-37523
	1500	3600	IPE 220	21-37524
4000	1000	3400	IPE 200	21-37525
	1250	3950	IPE 220	21-37526
	1500	4550	IPE 240	21-37527
5000	1000	5100	IPE 240	21-37528
	1250	6200	IPE 270	21-37529
	1500	7350	IPE 300	21-37530

Cantilever racking columns, double sided use

- Column profiles IPE 180 300 and column heights of 3000, 4000 and 5000 mm allow maximum flexibility in use
- All columns are supplied with floor anchors and shims
- Painted in gentian blue, RAL 5010


Height	Useable depth	Load capacity	Profile type	Ref. no.
mm	mm	kg		
3000	2 x 1000	5500	IPE 180	21-37531
	2 x 1250	6400	IPE 200	21-37532
	2 x 1500	7200	IPE 220	21-37533
4000	2 x 1000	6800	IPE 200	21-37534
	2 x 1250	7900	IPE 220	21-37535
	2 x 1500	9100	IPE 240	21-37536
5000	2 x 1000	10200	IPE 240	21-37537
	2 x 1250	12400	IPE 270	21-37538
	2 x 1500	14700	IPE 300	21-37539

Connector beams, type ES

- Galvanised finish
- Suited for 1000, 1250 and 1500 mm wide bays
- Delivery includes fixing material

Length	Bay width	Ref. no.
mm	mm	
997	1000	21-37464
1247	1250	21-37465
1497	1500	21-37466

For a bay width of	Height		
mm	3000 mm	4000 mm	5000 mm
1000	2 connector beams	3 connector beams	3 connector beams
1250	2 connector beams	3 connector beams	3 connector beams
1500	2 connector beams	2 connector beams	3 connector beams

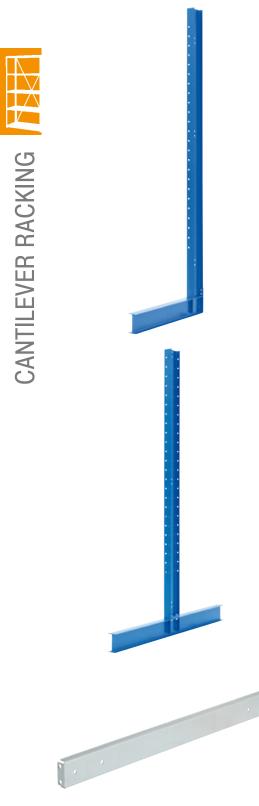

CANTILEVER RACKING | | |

Cantilever arms, type ES

- Useable depth of 1000, 1250 and 1500 mm
- IPE 80 160 profiles for maximum flexibility in use
- Painted in gentian blue, RAL 5010
- Delivery includes fixing material
- Bolt-on fixing to columns

Description	For a shelving depth of	Load capacity	Profile type	Ref. no.
	mm	kg		
for use with columns	1000	450	IPE 80	21-37379
made from IPE		750	IPE 100	21-37400
sections 180 - 220		1150	IPE 120	21-37421
	$\begin{array}{c c} mm & kg \\ \hline 1000 & 450 \\ \hline 750 \\ \hline 1150 \\ \hline 1250 & 350 \\ \hline 600 \\ \hline 950 \\ \hline 1500 & 300 \\ \hline 500 \\ \hline 750 \\ \hline 1000 & 1350 \\ \hline 1900 \\ \hline 2100 \\ \hline 1250 & 1050 \\ \hline 1500 \\ \hline 1750 \\ \hline 1500 & 900 \\ \hline 1250 & 900 \\ \hline \end{array}$	IPE 80	21-37380	
		600	IPE 100	21-37401
		950	IPE 120	21-37422
	1500	300	IPE 80	21-37381
		500	IPE 100	21-37402
		750	IEP 120	21-37423
for use with columns	1000	off kg 000 450 IPE 80 750 IPE 100 1150 IPE 120 250 350 IPE 80 600 IPE 100 950 IPE 120 500 IPE 100 750 IEP 120 000 1350 IPE 120 1900 IPE 140 2100 IPE 160 250 1050 IPE 120 1500 IPE 140 1750 IPE 160 500 900 IPE 120	IPE 120	21-37428
made from IPE		1900	IPE 140	21-37442
sections 240 - 300		2100	IPE 160	21-37456
	1250	1050	IPE 120	21-37429
		1500	IPE 140	21-37443
		1750	IPE 160	21-37457
	1500	900	IPE 120	21-37430
		1250	IPE 140	21-37444
		1400	IPE 160	21-37458



- Added lengthwise rigidity
- Galvanised
- Delivery includes fixing material

Length	Ref. no.
mm	
1750	21-37473
2000	21-37474
2250	21-37481
2500	21-37482
2750	21-37483
3500	21-37484

For a bay width of	Height		
mm	3000 mm	4000 mm	5000 mm
1000	1x 21-37481 (2250 mm)	2x 21-37473 (1750 mm)	2x 21-37481 (2250 mm)
1250	1x 21-37482 (2500 mm)	2x 21-37474 (2000 mm)	2x 21-37482 (2500 mm)
1500	1x 21-37483 (2750 mm)	1x 21-37484 (3500 mm)	2x 21-37482 (2500 mm)

The first two bays of a racking row must be fitted with 1 cross bracing set each. The next cross bracing set must be fitted to the 6th bay and, in longer rows, to every 5th following bay.





Racks for sheets and boards

- Rack base from galvanised steel sheet with grooves for easy sheet positioning and angled tubes ensures safe storage
- Galvanised push-in divider bars with additional bolt fixing



Sheet/plate racks for oddments

- Divider bars in various heights (2 x 120 mm, 1 x 385 mm, 1 x 640 mm and 2 x 900 mm) allow to store sheet materials of different dimensions
- Easy-to-view product presentation saves money
- Time saving and cost effective solution
- Encourages re-use of oddments, fast return on investment
- Designed for storing sheet materials from PVC, laminates, cardboard or sheet steel
- Takes sheets up to 4 mm thick and materials with a specific weight up to 9 kg/dm³

Dimensions L x W x H	Section width	Number of compart-ments	Height of divider bars	Load cap./ pce	Formats (from - to)	Ref. no.
mm	mm				mm	
1600 x 480 x 1000	50	5	2 x 120 / 1 x 385 / 1 x 640 / 2 x 900	200	80 x 120 - 1600 x 1600	22-14908



Sheet/plate racks

- Divider bars are 900 mm high
- Accommodates sheet materials from PVC, laminates, cardboard or steel, load capacity of up to 9 tonnes
- Easy-to-view product presentation saves money
- Storage goods are within immediate reach
- One-person operation

Dimensions L x W x H	Section width	Number of compart-ments	Height of divider bars	Load cap./ pce	Formats (from - to)	Ref. no.
mm	mm				mm	
2030 x 560 x 1000	45	6	900	1000	2000 x 1000 - 3000 x 1500	22-14909
2030 x 800 x 1000	45	9	900	1000	2000 x 1000 - 3000 x 1500	22-14910
	85	6	900	750	2000 x 1000 - 3000 x 2000	22-14911

BITO

Wire-mesh partitions


for heavy duty applications

- Sturdy steel tube framework, Ø 32 mm
- Provide reliable protection of valuable goods and equipment and enclose production and warehouse areas
- Mesh size 50 x 50 x 4 mm
- Fast and easy to assemble
- Brackets for bolt-on fixing to posts
- Tension adjusting bolts between posts and ceiling provide additional stability
- Posts and mesh panels painted in gentian blue, RAL 5010 or reseda green, RAL 6011

Wall panels, for heavy duty applications


- All-welded construction
- Supplied without posts

Dim. without brackets	Distance between upright centre lines	Ref. no.
mm	mm	
W 815 x H 2200	975	22-18534
W 1550 x H 2200	1710	22-18535

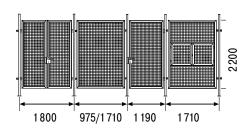







Accessories








B Door modules, 2 wings




Service hatches



Sliding doors



Posts



Pos.	Descriptio	n	brackets bet		Distance between upright centre lines Clear width/ height Description		
			mm	mm	mm		
A	Door	door panels opening optionally to right-hand or to left-hand	W 1070 x H 2200	1190	1070/2350	DIN left	22-18539
	modules, 1 wing	side as specified by DIN, complete with 2 posts, door handle set with angled stop plate and lock	W 1070 x H 2200	1190	1070/2350	DIN right	22-18540
B	Door	complete with 2 posts, locking bolt at floor height, door	W 1690 x H 2200	1800	1680/2350	DIN left	22-18541
	modules, 2 wings	handle set with angled stop plate and lock, supplied with welded-on screw nuts for bolt tensioners to ensure solid connection to ceiling (supplied without wall plugs)	W 1690 x H 2200	1800	1680/2350	DIN right	22-18542
G	Service hatches	wall panels with 2-wing hatch with mesh infill, stop plate and hasp and staple facility for customer-fitted padlock (delivery without posts)	W 1550 x H 2200	1710		standard version	22-18536
D	Sliding doors	complete with 2 posts, runner rail, fasteners and guide rails, door handle and hook lock, ready for mounting locking cylinder (to be fitted by customer), supplied with welded-on screw nuts for bolt tensioners to ensure solid connection to ceiling (supplied without wall plugs)	W 1800 x H 2200	1800	1700/2350	standard version	22-18543
A	Posts	60 mm steel tube with pre-drilled base plate and brackets	W 60 x H 2500			Corner post	22-18538
		for wall panel fixing, supplied with welded-on screw nuts for	W 60 x H 2500			Line end post	22-18546
		bolt tensioners to ensure solid connection to ceiling (supplied without wall plugs)	W 60 x H 2500			In-line post	22-18537
G	Bolt	lock posts tightly between floor and ceiling, long bolts to	L 500			for wire partitions	22-18544
	tensioners	allow adjustment to various room heights	L 1000			for wire partitions	22-18545





Aim high, stay safe!





In almost any warehouse or storage room operators will need suitable access equipment for loading and retrieving products. Our selection of shelving ladders, access platforms and kicksteps focusses on safety. Without exception, all products have been manufactured in Germany and have been awarded the quality mark "Made in Germany" by the TÜV NORD, an international certification body headquartered in Hanover, Germany, that is working with independent experts to assess the quality and safety of technical products. As all products provided on the following pages have been manufactured to the strictest standards of quality, we are able to offer our customers a 15 year warranty.

STEPS & LADDERS

Contents

Shelving access ladders and A-frame lad	lders 232
Aluminium folding steps	234
Mobile aluminium platform ladders	236
Step ladders	236
Mobile aluminium access ladders	237
Mobile access platforms	238
Mobile aluminium access platforms	240
Platform steps	241
Aluminium folding steps	241
Aluminium platform steps	242
Kick steps	243
Sten stools	243







Shelving access ladders from aluminium



- 80 mm deep treads with anti-slip ribbing and sturdy tread/stile connection
- Ideal for use with boltless shelving
- Please refer to our range of accessories to mount the ladder support railing. Support brackets must be mounted at a spacing between 0.80 and 1.30 metres.
- Distance between treads 235 mm, 20° angle
- Approved to DIN standard EN 15636 and other relevant safety regulations



Hook-on version

- Equipped with 2 pairs of hooks for hook-on fitting to the guide rail to allow a fully vertical lean-to position to the shelving when not in use
- Non-slip stile shoes
- Ladder width 420 mm

Ladder length	Number of treads incl. platform	Vertical length (push-flat position)	Access height approx.	Width at base	Post weight	Ref. no.
mm		mm	mm	mm	kg	
1690	6	1580	2800	580	4,3	16-13865
2190	8	2050	3300	750	6,0	16-13864
2690	10	2520	3800	920	7,4	16-13863
3190	12	2990	4300	1090	8,2	16-13862
3690	14	3460	4800	1260	9,6	16-13861
4190	16	3930	5300	1430	10,9	16-13860



Mobile version

- Non-slip stile shoes, 2 self-locking fixed castors at the lower stile ends, castor diameter 80 mm
- Silent and smooth operation on guide rail, can be pushed flat against shelving when not in use
- Ladder width 420 mm
- Ladder width including castors 600 mm

Ladder length	Number of treads incl. platform	Vertical length (push-flat position)	Access height approx.	Width at base	Post weight	Ref. no.
mm		mm	mm	mm	kg	
1664	6	1920	2800	780	8,0	16-19073
2164	8	2390	3300	950	9,5	16-19074
2664	10	2860	3800	1120	11,0	16-19076
3164	12	3330	4300	1290	12,0	16-19078
3664	14	3800	4800	1460	13,5	16-19077





Folds flat




For back-to-back shelving/racking, pivot-mounted

- Max. aisle width 1600 mm
- Castors compensate lateral spreading of up to 2 cm
- Ladder width 400 mm
- Ladder width including castors 580 mm

Ladder length	Number of treads incl. platform	Vertical length (push-flat position)	Access height approx.	Width at base	Post weight	Ref. no.
mm		mm	mm	mm	kg	
1780	6	2590	3440	990	18.5	16-39100
2030	7	2820	3670	1070	19.0	16-39101
2280	8	3060	3910	1160	19.5	16-39102
2530	9	3290	4140	1240	20.5	16-39103
2780	10	3530	4380	1330	21.0	16-39104
3030	11	3760	4610	1410	21.5	16-39105
3280	12	4000	4850	1500	23.0	16-39106

Accessories







Support brackets, aluminium, mounted along rail length



Fixing kit



 Ladder mounting rail, steel

Pos.	Description		Ref. no.
A	Support brackets, aluminium, mounted at rail ends, with left-hand stop	mounted to both ends of ladder support rail, assembly material is not included in the delivery	16-19112
	Support brackets, aluminium, mounted at rail ends, with right-hand stop	mounted to both ends of ladder support rail, assembly material is not included in the delivery	16-19113
B	Support brackets, aluminium, mounted along rail length	-	16-19111
C	Fixing kit, for steel tube rail ends and intermediate support brackets	1 fixing kit required per support bracket	16-40531
D	Ladder mounting rail, steel	diameter 30 mm, length 3000 mm	16-40530



Aluminium folding steps





- Nivello® anti-slip stile shoes
- Conical construction ensures high stability
- Ergo-pad® grips fitted at balance point for ergonomic carrying
- Distance between treads 235 mm, 20° angle
- Approved to DIN standard EN 15636 and other relevant safety regulations







ergo-pad® grip area



Single sided access, with large working platform and tool tray

- Large working platform, size approx. 400 x 400 mm
- Tool tray integrated into railing, dimensions approx. 350 x 200 mm, folds flat
- Optimised aluminium hinges "safe-cap" provide added support, 6-point riveting and increased material thickness provide maximum stability and durability
- Conical construction ensures high stability, 2 high-strength nylon webbing straps prevent
- 2 hand rails, length approx. 750 mm; self-assembly kit (railing length 1300 mm for ladders with at least 8 treads)

Access height approx.	Closed height	Height of platform/ upper tread	Width at base	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm	mm		kg	
2950	1670	950	610	4	10.3	16-39107
3150	1910	1190	640	5	11.7	16-39108
3400	2150	1420	660	6	12.6	16-39109
3650	2380	1660	690	7	13.9	16-39110
3900	2620	1890	720	8	15.8	16-39111
4100	2850	2130	750	9	17.2	16-39112
4350	3090	2360	780	10	18.4	16-39113



Sturdy aluminium hinges, bolted on 4 points, with 2 strong nylon safety straps to prevent spreading



Access height approx.	Closed height	Width at base	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm		kg	
2250	690	440	2x3	5,4	16-13847
2500	930	460	2x4	6,7	16-13846
2750	1160	490	2x5	8,0	16-13845
3000	1400	520	2x6	9,3	16-13844
3250	1630	550	2x7	10,8	16-13843
3500	1870	580	2x8	12,1	16-13842
3750	2100	610	2x9	14,3	16-13841
4000	2340	640	2x10	15,1	16-13840
4500	2790	700	2x12	18,0	16-13839
5000	3260	760	2x14	22,0	16-13838



Aluminium folding steps

with castors

- 80 mm deep treads with anti-slip ribbing and sturdy tread/stile connection
- Nivello® anti-slip stile shoes
- Conical construction ensures high stability
- Metal braces safely connect both step sides; braces can be unfastened for folding the steps
- 4 self-locking spring-mounted castors at the lower stile ends
- Castor diameter 80 mm
- Distance between treads 235 mm, 20° angle
- Approved to DIN standard EN 15636 and other relevant safety regulations





Single sided access, with castors

Optimised aluminium hinges "safe-cap" provide added support, 6-point riveting and increased material thickness provide maximum stability and durability

Access height approx.	Closed height	Width at base	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm		kg	
2750	1370	620	3	8,6	16-13837
3000	1600	650	4	9,4	16-13836
3250	1830	680	5	10,5	16-13835
3500	2070	700	6	11,8	16-13834
3750	2310	740	7	13,2	16-13833
4000	2540	770	8	14,5	16-13832
4250	2760	800	9	15,7	16-13831
4500	3000	830	10	17,0	16-13830
5000	3480	890	12	19,4	16-13829
5500	3950	950	14	22,7	16-13828



Double sided access, with castors

Access height approx.	Closed height	Width at base	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm		kg	
2250	690	590	2x3	8,1	16-13858
2500	930	610	2x4	9,5	16-13857
2750	1160	640	2x5	10,8	16-13856
3000	1400	670	2x6	12,3	16-13855
3250	1630	700	2x7	13,9	16-13854
3500	1870	730	2x8	15,3	16-13853
3750	2100	760	2x9	17,0	16-13852
4000	2340	790	2x10	18,5	16-13851
4500	2790	850	2x12	21,8	16-13850
5000	3260	910	2x14	25,6	16-13849





Mobile aluminium platform ladders



- 80 mm deep treads with anti-slip ribbing and sturdy tread/stile connection
- Nivello® anti-slip stile shoes
- 2 hand rails, platform railing with knee rails
- Rear stabiliser provides added stability
- Diagonal braces can be unbolted for folding the steps and saving space when not in use
- Non-slip working platform sized approx. 510 x 600 mm with toe board on three sides
- 2 fixed castors with brake, Ø 125 mm
- Distance between treads 235 mm, 20° angle
- Approved to DIN standard EN 15636 and other relevant safety regulations









Access height approx.	Closed height	Height of platform/ upper tread	Width at base	Open width (distance rack/ ladder base)	Number of treads incl. plat- form	Weight	Ref. no.
mm	mm	mm	mm	mm		kg	
3850	2850	1850	1200	1460	8	45.5	16-39114
4100	3100	2080	1200	1570	9	49.5	16-39115
4600	3600	2560	1460	1780	11	54.0	16-39116



Mobile aluminium access ladders

folding version

- Sturdy stiles
- 80 mm deep treads with anti-slip ribbing and sturdy tread/stile connection
- Large platform sized 650 x 600 mm with non-slip aluminium surface
- Twin handrails
- Platform railing on three sides
- Nivello® anti-slip stile shoes provide safe footing
- Tool tray on upper railing
- Ladder width 650 mm
- Approved to DIN standard EN 15636 and other relevant safety regulations







Folding version

Stabiliser with two braked fixed castors Ø 125 mm

Access height approx.	Height of platform/ upper tread	Height incl. railing	Ladder length closed	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm	mm		kg	
3150	1150	2150	2750	5	37	16-39132
3400	1380	2380	3000	6	39	16-39133
3600	1610	2610	3250	7	43	16-39134
3850	1840	2840	3500	8	45	16-39135
4300	2300	3300	4000	10	49	16-39136
4800	2770	3770	4500	12	55	16-39137
5250	3230	4230	5000	14	76	16-39138



Folding version, narrow width stabiliser

2 fixed castors with brake Ø 125 mm


www.bito.com

- Small width stabiliser for use in particularly narrow aisles
- Weight balancers provide required operational safety, delivery includes assembly instructions

Access height approx.	Height of platform/ upper tread	Height incl. railing	Ladder length closed	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm	mm		kg	
3150	1150	2150	2750	5	67	16-39139
3400	1380	2380	3000	6	89	16-39140
3600	1610	2610	3250	7	103	16-39141
3850	1840	2840	3500	8	125	16-39142
4300	2300	3300	4000	10	149	16-39143
4800	2770	3770	4500	12	205	16-39144
5250	3230	4230	5000	14	218	16-39145



237



Mobile access platforms

platform height up to 2 metres



- **■** Robust yet leightweight box section aluminium stiles
- Guardrail on 3 sides includes knee rail and toeboards
- Supplied unmounted, detailed instructions are included
- 4 self-locking swivel castors (2 with brake), Ø 125 mm
- Tread depth 200 mm
- Platform size 600 x 800 mm
- Hand railing on both sides is optional according to DIN EN131-7 if the incline does not exceed 60°
- Approved to DIN standard EN 15636 and other relevant safety regulations



Single sided access, treads and platform from wood

Varnished beech treads with slip-proof ribbing

Access height approx.	Platform height without railing	Dimensions at base W x D	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm		kg	
2700	720	770 x 1240	3	35	16-19085
3000	960	820 x 1410	4	38	16-19086
3200	1200	880 x 1580	5	42	16-19087
3500	1440	940 x 1750	6	45	16-19088
3700	1680	1000 x 1920	7	48	16-19089
3900	1920	1060 x 2090	8	51	16-39152



Double sided access, treads and platform from wood

■ Varnished beech treads with slip-proof ribbing

Access height approx.	Platform height without railing	Dimensions at base W x D	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm		kg	
2700	720	770 x 1510	3	35	16-19090
3000	960	820 x 1790	4	40	16-19091
3200	1200	880 x 2070	5	44	16-19092
3500	1440	940 x 2350	6	48	16-19093
3700	1680	1000 x 2620	7	53	16-19094
3900	1920	1060 x 2900	8	59	16-39161



Single sided access, treads and platform from aluminium with non-slip diamond pattern surface

- Aluminium treads and platform with non-slip ribbed surface
- Please note: Delivery does not include hand railing

Access height approx.	Platform height without railing	Dimensions at base W x D	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm		kg	
2700	720	770 x 1240	3	30	16-39146
3000	960	820 x 1410	4	32	16-39147
3200	1200	880 x 1580	5	35	16-39148
3500	1440	940 x 1750	6	38	16-39149
3700	1680	1000 x 1920	7	43	16-39150
3900	1920	1060 x 2090	8	47	16-39151





Double sided access, treads and platform from aluminium with non-slip diamond pattern surface

- Aluminium treads and platform with non-slip ribbed surface
- Please note: Delivery does not include hand railing

Access height approx.	Platform height without railing	Dimensions at base W x D	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm		kg	
2700	720	770 x 1510	3	30	16-39155
3000	960	820 x 1790	4	34	16-39156
3200	1200	880 x 2070	5	39	16-39157
3500	1440	940 x 2350	6	44	16-39158
3700	1680	1000 x 2620	7	49	16-39159
3900	1920	1060 x 2900	8	55	16-39160



Accessories





A Handrails for single sided access

B Handrails for double sided access

Pos.	Description		Ref. no.
A	Handrails for single sided	suited for access platforms with 3 treads	16-39153
•	access, left and right hand	suited for access platforms with 4-6 treads	16-19115
	doors as required	suited for access platforms with 7-8 treads	16-39154
B	Handrails for double sided	suited for access platforms with 3 treads	16-39162
	access	suited for access platforms with 4-6 treads	16-39163
		suited for access platforms with 7-8 treads	16-39164



platform height up to 4 metres



- Supplied with twin hand rails and platform with three-sided guard railing, railing height 1100 mm
- All steps and ladders comply with the latest safety regulations in Germany and with the European standard DIN EN ISO 14122
- Rear stabiliser with 2 fixed castors, Ø 160 mm
- All castors with total stop brake
- 2 swivel castors, Ø 125 mm, fitted to mounting side



60° incline

- Tread width 800 mm
- Tread depth 200 mm

Height of platform/upper tread	Width at base	Number of treads incl. platform	Ref. no.
mm	mm		
1690	1630	7	16-39177
1940	1780	8	16-39178
2180	1920	9	16-39179
2420	2040	10	16-39180
2660	2170	11	16-39181
2900	2320	12	16-39182
3150	2460	13	16-39183
3400	2600	14	16-39184
3640	2740	15	16-39185
3880	2880	16	16-39186



45° incline

- Tread width 800 mm
- Tread depth 240 mm

Height of platform/upper tread	Width at base	Number of treads incl. platform	Ref. no.
mm	mm		
1670	2250	8	16-39165
1870	2450	9	16-39166
2080	2630	10	16-39167
2290	2840	11	16-39168
2500	3050	12	16-39169
2700	3250	13	16-39170
2910	3460	14	16-39171
3120	3670	15	16-39172
3330	3880	16	16-39173
3540	4090	17	16-39174
3750	4300	18	16-39175
3950	4500	19	16-39176



Aluminium folding steps


- Folds flat in a second
- Heavy duty twin stiles
- Anti-slip treads sized 205 x 360 mm
- Non-slip stile shoes

Without push bar

■ Approved to DIN standard EN 15636 and other relevant safety regulations





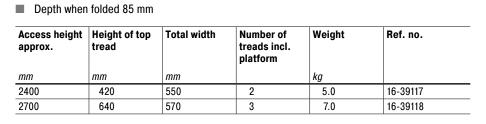



Intertek

Deutschland

Bauart geprüft

With folding handle and tool tray

■ Depth when folded 125 mm

Access height approx.	Height of top tread	Total width	Number of treads incl. platform	Weight	Ref. no.	
mm	mm	mm		kg		
2700	640	550	3	9.0	16-39119	
2900	860	570	4	11.5	16-39120	
3100	1060	590	5	13.5	16-39121	





Aluminium platform steps







- Heavy duty aluminium construction
- Aluminium treads and platform with non-slip ribbed surface





Single sided access

- Sturdy welded construction from tubular aluminium profiles
- Non-slip stile shoes from plastic
- Large uppermost tread sized 410 x 300 mm for comfortable and safe working
- Supplied unmounted, detailed instructions are included

Access height approx.	Platform height	Dimensions upper tread W x H	Dimensions at base W x D	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm	mm		kg	
2500	490	410 x 300	540 x 530	2	5.30	16-39122
2700	730	410 x 300	590 x 770	3	7.90	16-39123
3000	970	410 x 300	640 x 1000	4	10.50	16-39124

Single sided access, folding version

- Heavy duty aluminium box section stiles
- Nivello® anti-slip stile shoes
- Platform steps can be folded for storage
- 80 mm deep treads with non-slip surface
- Aluminium platform with anti-slip diamond pattern surface

Access height approx.	Platform height	Dimensions upper tread W x H	Dimensions at base W x D	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm	mm		kg	
2700	720	650 x 300	760 x 800	3	7.50	16-39127
3000	960	650 x 300	920 x 830	4	8.90	16-39128

Double sided access, folding version

- Heavy duty aluminium box section stiles
- Non-slip stile shoes from plastic
- Platform steps can be folded for storage
- 80 mm deep treads with non-slip surface
- Aluminium platform with anti-slip diamond pattern surface

Access height approx.	Platform height	Dimensions upper tread W x H	Dimensions at base W x D	Number of treads incl. platform	Weight	Ref. no.
mm	mm	mm	mm		kg	
2460	460	520 x 330	620 x 560	2x2	4.70	16-39129
2690	690	520 x 330	790 x 590	2x3	6.10	16-39130
2930	930	520 x 330	960 x 620	2x4	7.70	16-39131



Kick steps

- From grey PVC, with 3 braked castors
- Can be moved to any place with a slight push
- Castors retract and lock in place when weight is applied

Diameter at top	Diameter at base	Closed height	Load capacity	Ref. no.
mm	mm	mm	kg	
300	450	435	150	16-11590



Step stools

- 150 mm deep treads, treated wood
- Platform with grip hole
- Stiles from epoxy-coated steel in grey, RAL 7023
- Non-slip stile shoes
- Approved to DIN standard EN 15636 and other relevant safety regulations



Without castors

Access height approx.	Number of treads incl. platform	Closed height	Dimensions at base W x D	Ref. no.
mm		mm	mm	
2400	2	490	460 x 620	16-19104
2600	3	730	500 x 820	16-19105
2800	4	970	540 x 1000	16-19106



With castors

- 4 fixed castors with brake for on-site mounting
- Castor orientation allows forward and reverse movement and lock in place as soon as weight is applied

Access height approx.	Number of treads incl. platform	Closed height	Dimensions at base W x D	Ref. no.
mm		mm	mm	
2400	2	490	460 x 620	16-19107
2600	3	730	500 x 820	16-19108
2800	4	970	540 x 1000	16-19109











Smart solutions to protect our environment!





Environmentally hazardous substances such as oils, acids, paints, etc. require environmentally sound storage solutions! The BITO product range caters for these needs with various products such as drum racking, spill trays and tapping stations as well as with complete solutions such as spill deck systems and boltless shelving standing in a spill tray to provide safe storage of kegs and cans containing hazardous liquids. Of course, our multi-purpose container series MB also offers a "green" option.

Pick your solution from the following pages! For further questions, call our hotline number below!





Contents

Drum racking	246
Spill trays	247
Spill prevention systems	248
Drum pallets	249
Safety bunds	250
Containers for hazardous substances	250
Containment shelving	251











Drum racking

- Safe and envrionmentally friendly storage of oil, grease and
- Suited for horizontal storage of 4 x 200 litre drums
- Drum cradles allow convenient and precise drum positioning
- Supplied with bucket/can holder
- Spill tray with TÜV certificate of conformity
- Spill tray from 3 mm thick steel sheet according to DIN 10025, supplied with certificate of conformity (ÜHP) for compliance with above-standard safety regulations









extension bay 1880 mm



Extension bay

Accessories









A Drum supports

B Bucket/can holders

Beams

D Level decking options to fit BITO-TwinTop® beams


Pos.	Description	cription		Dimensions	Ref. no.
				mm	
A	Drum supports	for drum racking, frame from angled profiles, rear stop	RAL 5010 Gentian blue	L 270 x H 210 x D 800	66-18103
B	Bucket/can holders	for drum racking, hook-on fitting to drum cradle, grid platform sized 330 x 230 mm $$	RAL 5010 Gentian blue	L 330 x H 347 x D 230	66-18104
G	Beams	BITO TwinTop® profile, type 95L, 5 hooks per connector provide reliable form and force locking, gives excellent lengthwise rigidity to racking construction, height adjustable on a 50 mm pitch allowing optimum adaptation to the dimensions of stocked loads, epoxy-coated in gentian blue, RAL 5010	RAL 5010 Gentian blue	L 1800 x H 95	66-23656
D	Level decking options to fit BITO-Twin- Top® beams - 1 segment	hot-dip galvanised mesh decks, 1 segment, good air circulation and water permeability, ideal for warehouses in which a sprinkler system has to be installed, lipped edges allow flush drop-on fitting on beams without adding to the level height, grid infill 66 x 33 mm, mesh decking accepts high load capacities, force-fit connection of grid bars with the angled frame makes mesh decks particularly suited for heavy duty applications, easy and fast drop-on fitting onto the box-type beams, stocked goods can also be identified from a lower position, Please order BITO TwinTop® beams separately	galvanised	L 1800 x W 800D 800	66-40871



Drum racking

for drum storage on pallets

- Shelf load: 3000 kg
- Safe and envrionmentally friendly storage of oil, grease and acids
- Suited for vertical drum storage
- Spill tray with TÜV certificate of conformity
- Spill tray from 3 mm thick steel sheet approved to DIN 10025, retaining capacity 415 litres, supplied with certificate of conformity (ÜHP) for compliance with above-standard safety regulations
- Load capacity per level 3000 kg maximum
- Frames and spill tray galvanised, beams epoxy-coated in gentian blue RAL 5010
- Further bays can be added whenever required





Dimensions H x W x D	Description	Ref. no.
mm		
2500 x 2860 x 1100	Starter bay	66-26666
2500 x 2780 x 1100	Extension bay	66-26667

Spill trays

From 3 mm thick steel sheet approved to DIN EN 10327, sealed to prevent leakage, with certificate of conformity for above-standard quality



i BITO info


Please note: The spill tray must hold at least 10% of the total storage volume or at least the entire content of the largest container.

Exception: In water protection areas the spill tray must hold 100% of the contents.

External dimensions W x H x D	Spill tray volume	Description	Ref. no.
mm	litres		
1700 x 251 x 1290	269	without mesh deck	66-33110
2600 x 260 x 1290	415	without mesh deck	66-9608
		with mesh deck (can be removed)	66-9611

£3

Spill prevention systems

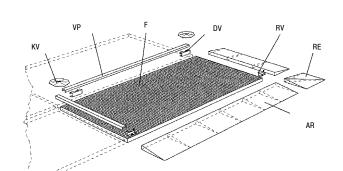

- Approved for highly flammable liquids
- Modular system allows future expansion and modification
- Availability of spill deck modules in various dimensions allows optimum adaptation to your operational requirements
- Load capacity 5000 kg/m², maximum wheel load 450 kg
- Easy assembly, unlimited range of applications
- Spill decks can also be supplied with increased load capacity for lift truck and lorry traffic
- Catchment sump from 3 mm thick steel sheet, galvanised, with removable mesh deck
- Individual solutions can be realised upon request (f. ex. for increased load capacity)
- Spill deck modules and accessories are galvanised






Dimensions L x H x D	Spill tray volume	Ref. no.
mm	litres	
1362 x 78 x 1362	80	24-12943
1862 x 78 x 1362	110	24-12944
2862 x 78 x 1362	170	24-12945
2862 x 78 x 1862	229	24-12946

Ramp edges



Description	Dimensions L x W	Ref. no.
	mm	
Ramp side profiles	1320 x 720	24-12950
	1820 x 720	24-12951
	2820 x 720	24-12952
Ramp edges	730 x 730	24-12953

Fixing elements



Description	Dimensions L x W	Ref. no.
	mm	
Distance holders	25 x 120	24-12954
Edge clamps	20 x 100	24-12955
Four way clamp	130 x 130	24-12956
T-profiles to join the sides ot spill deck	1320 x 45	24-12947
modules	1820 x 45	24-12948
	2820 x 45	24-12949

Drum pallets

- Approved for highly flammable liquids
- Removable hot-dip galvanised mesh deck
- With fork shoes for safe forklift truck handling
- Retaining volume is equivalent to 1 drum with a 200 litre content

■ Spill tray from 3 mm thick steel sheet according to DIN 10025, supplied with certificate of conformity (ÜHP) for compliance with above-standard safety regulations



			colour	RAL 5010 Gentian blue	galvanised
External dimensions L x D x H	Height of fork shoes/runners	Description	Spill tray volume	Ref. no.	Ref. no.
mm	mm		litres		
1236 x 816 x 328 mm	90	2 drums in 1 row	208	24-12915	24-11406
1290 x 1211 x 250 mm		4 drums in 2 rows	200	24-12917	24-12918
2460 x 816 x 233 mm	100	4 drums in 1 row	210	24-12914	24-12916
2460 x 1211 x 210 mm		8 drums in 2 rows	205	24-12919	24-12920

Safety bunds

- From polyethylene to resist aggressive substances
- Highly resistant to most acids and alkaline materials
- Retaining volume 200 litres
- Dimensioned for optimum use of lorry loading space and for storage in pallet racking
- Accommodates 6 PVC kegs with a 60 litre capacity or 2 drums with a 200 litre capacity
- Highly impact resistant even if temperature variations are considerable



External dimensions W x H x D	Description	Ref. no.
mm		
1240 x 285 x 845	without mesh deck	24-12958
	with mesh deck (can be removed)	24-12959

Containers for hazardous substances

Safe transport of hazardous goods such as paints, sprays, etc.

- Consisting of container and drop-over lid
- Tightly closing lid with ready-mounted metal lever locks
- MB containers have been approved by the BAM Federal Institute for Materials Research and Testing as outer packaging for hazardous goods categorised into packaging groups II and III. The certificate of approval bears the number 4H2/Y25/S/20/D/BAM6107-BITO. MB containers conform to the German regulations on the transport of hazardous substances by road (GGVS), by rail (GGVE), by sea (GGVSee) and by air.







See our multi-purpose container range from page 74

External dimen- sions L x W	Height	Volume	Load capacity	Bin type	Colour	Ref. no.
mm	mm	litres	kg			
410 x 310	238	18	13	MBSG43221CLIP	purple red	6-18653
	338	27	13	MBSG43321CLIP	purple red	6-18655
610 x 410	238	38	17	MBSG64221CLIP	purple red	6-18657
	338	58	20	MBSG64321CLIP	purple red	6-18659
	438	74	20	MBSG64421CLIP	purple red	6-18660

BITO

Containment shelving

- Shelf levels are adjustable on a 25 mm pitch
- All parts are galvanised
- Extensions possible at any time

i BITO info

All shelving units can be equipped with solid shelves, wire shelves or tray shelves. All shelf types can also be combined in the same unit.

With tray shelves

- Supplied with 5 tray shelves with liquid-tight seams
- 60 mm deep tray shelves, upper edge folded to prevent injuries

Shelf load	Dimensions H x W x D	Description	Ref. no.
kg	mm		
200	2000 x 1058 x 524	Starter bay	10-53089
	2000 x 1008 x 524	Extension bay	10-53090

LACO LACO

With shelves and spill tray

- Supplied with 5 shelves and a spill tray
- Reliable soil protection, as spill tray is large enough to accommodate entire shelving
- Approved for highly flammable liquids
- 83 mm deep tray shelves, retention volume 30 litres

Shelf load	Dimensions H x W x D	Spill tray dimensions H x W x D	Description	Ref. no.
kg	mm	mm		
200	2000 x 1058 x 524	83 x 1096 x 570	Starter bay	10-53093
200	2000 x 1008 x 524	83 x 1005 x 570	Extension bay	10-53094



With wire shelves and spill tray

- Supplied with 5 wire shelves and a spill tray
- Reliable soil protection, as spill tray is large enough to accommodate entire shelving
- Approved for highly flammable liquids
- 83 mm deep tray shelves, retention volume 30 litres

Shelf load	Dimensions H x W x D	Spill tray dimensions H x W x D	Description	Ref. no.
kg	mm	mm		
100	2000 x 1058 x 524	83 x 1096 x 570	Starter bay	10-53091
100	2000 x 1008 x 524	83 x 1005 x 570	Extension bay	10-53092



Accessories







Additional shelves

B Tray shelves

Wiro	shelve	٠
 wile	SHEIVE	7

Pos.	Description		Ref. no.
A	Shelves, 40 mm high	set includes 4 shelf clips, shelf height 40 mm, with shelf perforations for dividers, supplied with 4 shelf clips	10-17076
В	Tray shelves	safe storage of receptacles with spill potential such as open paint cans etc., shelves retain spillage, height 60 mm, supplied with 4 shelf clips, shelf load capacity 200 kg	10-12937
C	Wire shelves	shelf height 25 mm, mesh rods with 30 mm spacing, supplied with 4 shelf clips, load capacity per wire shelf 100 kg	10-16489





Stay safe and well organised!





Optimise your logistic processes and protect your ware-house and workshop facilities as well as your staff while complying with the latest regulations set up by health and safety at work acts as well as accident prevention and insurance associations. Take a look at our barriers and bumpers to prevent collision damage, accidents and resulting idle times.



Our useful range of products also includes high-quality line marking paint and marking tapes to highlight in-house traffic routes and hazard areas as is required by the latest regulations.

Also consider our selection of signs and labels for easy and immediate product location and identification!

Identification & safety



Contents

Spray paint marking	254
Traffic and pedestrian control	258
Flexible impact barriers	260
Flexible impact barriers	262
Impact protection barriers	265
Shelving & racking protection	267
Rack end barrier	268
Security mirrors	269
Display systems	270
Document pockets	273
Stock identification signs	276
Labels	277
Label holders	279





Spray paint marking



Line marking paint

- Quick-drying
- Abrasion-resistant
- CFC-free
- For delineating shelving and racking areas, pallet deposit areas, in-house traffic routes, etc.
- Compliance with the latest regulations of accident prevention and insurance associations and national health and safety at work acts
- Spray line width 50 mm, sufficient for approx. 75-90 m
- Drying time approx. 24 hours
- Resistant to petrol, oil, lubricants and most chemicals
- Suited for most surfaces
- The application surface should be free of soil, oils, chemicals and paint residues

Can content	Colour	Ref. no.
ml		
750	yellow	46-20700
	white	46-20701
	orange	46-20702
	black	46-20703
	grey	46-20704
	blue	46-20705
	red	46-20706
	green	46-20707



Line marking applicators

- 4-wheeled applicator providing greater stability for straight long lines; rear wheels can be removed
 - 2-wheeled application of curved lines close to and around shelving and racking, deposit areas, pallet stacks etc.
- Material steel tube
- Colour blue

Line width	Ref. no.
mm	
50-75	46-20709
100-130	46-20710



Self-adhesive hazard warning tape

- Highlight hazard areas and obstacles in your warehouse as is required by the latest health and safety regulations
- Clear marking of hazard areas and obstacles provides increased operational safety
- Can be manually applied or with a tape dispenser
- Material vinyl

Material thickness	Length	Width	Colour	Ref. no.
μ	m	mm		
33	66	60	yellow/black	46-20820
			red/white	46-20821
170	33 50 75	50	yellow/black	46-20812
			red/white	46-20813
		75	yellow/black	46-20814
			red/white	46-20815



Marking tapes

- For short-term and medium-term marking
- Can be removed without residue
- Optimum application temperature at least 10°C
- The application surface must be dry and free of grease and dust
- Can be manually applied or with a tape dispenser
- Material vinyl

Material thickness	Length	Width	Colour	Ref. no.
μ	m	mm		
150	33	50	yellow	46-20800
			white	46-20801
			orange	46-20802
			blue	46-20803
			red	46-20804
	75	green	46-20805	
		yellow	46-20806	
		white	46-20807	
			orange	46-20808
			blue	46-20809
			red	46-20810
			green	46-20811



Marking tape dispensers

_	\sim
٠,	` ?
<	^>

•	~
Description	Ref. no.
for spray line widths between 50 and 75 mm	46-20816



Edge and corner buffering



- Temperature resistant from -40 to +100 °C
- Compliance with fire protection regulation DIN 4102 B2
- Signal colouring in compliance with DIN 4844
- For indoor and outdoor use
- Age-resistant
- Can be cut to required length with a sharp knife



Increase warehouse safety by highlighting spots of potential personnel injury or equipment damage.



Shock absorbing bumpers

- Suited for heavy duty applications
- Highly shock-absorbent
- For light duty applications
- Suited for areas with automated operations
- Self-adhesive
- Can also be bolted to carrier
- Material polyurethane
- Colour yellow/black



Dimensions	Description	Width / Side length	Material thickness	Ref. no.
mm		mm	mm	
↑ 20 ↓ ↓ 50 →	Flat shaped profile, supplied in lengths of 1 m	50	20	46-20501
	Flat shaped profile, 5 metre roll	50	20	46-20502
12	Angled profile, supplied in lengths of 1 m	47 x 47	12	46-20503
35 ↓	Angled profile, 5 metre roll	47 x 47	12	46-20504



Edge buffering

- Protects personnel from injury
- Shock-absorbent
- Ideal for areas with manual operations
- For light duty applications
- Material polyurethane
- Colour yellow/black

Dimensions	Ref. no.	
mm		
	supplied in lengths of 1 m, self-adhesive, flat underside	46-20505
35 	5 metre roll, self-adhesive, flat underside	46-20506
	supplied in lengths of 1 m, self-adhesive, angled underside	46-20507
25	5 metre roll, self-adhesive, angled underside	46-20508
	supplied in lengths of 1 m, push-on fitting, grooved underside	46-20511
8+	5 metre roll, push-on fitting, grooved underside	46-20512



Corner buffering

- Angled underside
- Self-adhesive
- Material polyurethane
- Colour black

Description	Ref. no.
bi-directional	46-20509
tri-directional	46-20510



Pipework buffering

- For pipes, cable ducts and hoses
- Self-adhesive
- Additional fixing with brackets possible
- Material polyurethane
- Colour yellow/black

Dimensions	Description	Suited for tube diameters of	Ref. no.
mm		mm	
	supplied in lengths of 1 m	20 - 40	46-20513
30/50		40 - 70	46-20515



Traffic and pedestrian control



Fences in hazard zones


Post and chain kits


- 6 posts per kit
- Supplied with 5 plastic chains, each 3 m long
- Increased operational safety
- Manufactured from high grade PVC for excellent wear and tear resistance
- Can also be used separately

Post height	Post weight	Post base dimensions	Description	Ref. no.
mm	kg	mm		
1000	4.2	370 x 75	red with white reflector stripes	46-20765
			yellow with black stripes	46-20764

Accessories

Descripti	ion		Descrip- tion	Dimen- sions	Ø foot	Ref. no.
				mm	mm	
	Chain posts	M36 thread for mounting threaded eye bolts or signs, supplied with eye bolt, Material polypropylene	red with reflector stripes	H 1000	400	46-40171
		material perspressions	yellow with 2 black stripes	H 1000	400	46-40172





- Post bends upon impact and rebounds to original position
- Flexible, yet extremely durable
- Please order fixings separately
- Material polyurethane
- Colour yellow/black

Height	Ø foot	Ø Post	Colour	Ref. no.
mm	mm	mm		
300	200	80	yellow/black	46-40163
450	200	80	yellow/black	46-40162
750	200	80	yellow/black	46-40161
1000	200	80	yellow/black	46-40160



Accessories



Descript	ion		Descrip- tion	Ref. no.
•	Adapters	M36 thread for mounting threaded eye bolts or signs, Material polypropylene, colour black	for flexi-posts	46-40166
I	Floor anchor set	supplied with 3 floor anchors Ø 18 mm with hex head lag screws	for flexi-posts	46-40164
	Threaded eye bolts	M36 thread for chain post mounting, ideal for guiding barrier chains, ropes and tapes, Material polypropylene, colour black	for flexi-posts	46-40165

Identification & safety

A

0

BITO

Accessories for post and chain kits and for flexi-posts

Pos.	Description		Description	Dimensions	Ref. no.
				mm	
A	Plastic chains	link chain posts to each other, Material polypropylene, colour	with 2 chain links	L 3000	46-40175
		yellow/black	without chain links	L 25000	46-40177
		link chain posts to each other, Material polypropylene, colour		L 3000	46-40174
		red/white	without chain links	L 25000	46-40176
В	Chain links	allow hook-in fitting of chains/chain links, Material polypropylene, colour black	for plastic chains	-	46-40173
C	Post mounted signs	connector piece with M36 thread for chain post mounting, Material	triangular sign	L 390	46-40180
		polypropylene	round sign	Ø 280	46-40183
			round sign	Ø 380	46-40182
			rectangular sign	W 350 x H 410	46-40181







Belt barrier posts, plastic

- Practical and sturdy barrier and guiding system
- Speedy solution for cordoning off walkways and areas with restricted access or when organising pedestrian queues
- Suitable for use in industry, storage areas, car parks, open areas etc.
- Store away when not in use: simply remove post from its domed foot. Ready for instant re-use by pulling out the tape from its cartridge and hooking it to the next post. The centrifugal belt-braking system prevents belt from retracting too quickly.
- Cartridge and domed foot from plastic; foot can be weighted with sand or gravel for greater stability, for indoor and outdoor use

Height	Ø Post	Ø foot	Belt length	Belt width	Colour	Ref. no.
mm	mm	mm	mm	mm		
950	50	360	3	50	red/white	46-53502
					yellow/black	46-53503





Accessories

Pos.	Description		Dimen- sions	Ref. no.
			mm	
A	Wall receiver clip, bolt-on fixing	easy-to-mount wall clip from tough plastic for plug-in belt fixing, colour black	L 50 x H 88 x D 12 mm	46-53512
В	Wall receiver clip, with magnetic backing	wall clip for magnetic belt fixing, rope off a doorway or an area by linking two opposite walls, colour black	L 50 x H 88 x D 12 mm	46-53513



A Wall receiver clip, bolt-on fixing



B Wall receiver clip, with magnetic backing



Flexible impact barriers





- Manufactured from flexible plastic
- Yields when there is a collision, absorbs impact forces and returns to original upright position
- Impact absorption prevents damage to barriers, vehicles and floor, reducing maintenance and repair, eliminating downtime
- Yellow/black signal striping guarantees high visual impact
- For outdoor and indoor use
- Easy to install, supplied with fixing material



Modular construction provides great flexibility!

Adapt this system to your requirements by choosing posts and guard rail sets.

Total length = 1x post diameter + number of guard rail sets



- Persons in your premises are safely channeled in the right direction
- Tested to withstand a static load of 2 kN
- Corresponds to the weight of two persons leaning against the safety barrier, ~ 150 kg
- Colour yellow/black

Description	Height	Length	Base plate	Diameter	Impact area	Ref. no.
	mm	mm	mm	mm	mm	
Line end post and in-line post	1181		180 x 180	130	233 - 1.100	46-52788
Corner post 90°	1181		180 x 180	130	233 - 1.100	46-52789
Set of hori-		500		100 x 35	233 - 1.100	46-52790
zontal profiles		1000		100 x 35	233 - 1.100	46-52791
		1500		100 x 35	233 - 1.100	46-52792
		2000		100 x 35	233 - 1.100	46-52793



Flexible pedestrian guard railing


- Separates walkways from trafficways, secures operations
- Allow the replacement of posts and guard rails without having to dismantle an adjacent section of the barrier
- Patented connection technology: a special energy-absorbing coupling system provides inceased protection
- Tested to withstand an impact of 8,200 joules
- Equals 3.2 t at 8 km/h at an impact angle of 45°
- Colour yellow/black

Description	Height	Length	Base plate	Diameter	Impact area	Ref. no.
	mm	mm	mm	mm	mm	
Line end post	1136		180 x 180	130	450 - 1.100	46-52794
In-line post	1136		180 x 180	130	450 - 1.100	46-52795
Corner post 90°	1136		180 x 180	130	450 - 1.100	46-52796
Set of horizon-		600		100	450 - 1.100	46-52797
tal profiles		1000		100	450 - 1.100	46-52798
		1600		100	450 - 1.100	46-52799
		2000		100	450 - 1.100	46-52800









- Impact absorption prevents damage to barriers, vehicles and floor, reducing maintenance and repair, eliminating downtime
- Yellow/black signal striping guarantees high visual impact
- For outdoor and indoor use
- Easy to install, supplied with fixing material







i BITO info

Modular construction provides great flexibility!

Adapt this system to your requirements by choosing posts and guard rail sets.

Total length = 1x post diameter + number of guard rail sets

Flexible traffic railing

- Protects machinery and buildings against collision damage
- Allow the replacement of posts and guard rails without having to dismantle an adjacent section of the barrier
- Patented connection technology: a special energy-absorbing coupling system provides inceased protection
- Tested to withstand an impact of 14,400 joules
- Equals 4 t at 9 km/h at an impact angle of 45°
- Colour yellow/black

Description	Height	Length	Base plate	Diameter	Impact area	Ref. no.
	mm	mm	mm	mm	mm	
Line end post	456		180 x 180	158	204 - 362	46-52801
In-line post	456		180 x 180	158	204 - 362	46-52802
Corner post 90°	456		180 x 180	158	204 - 362	46-52803
Set of horizontal		500		158	204 - 362	46-52804
profiles		1000		158	204 - 362	46-52805
		1500		158	204 - 362	46-52806
		2000		158	204 - 362	46-52807

Flexible traffic railing "Plus"

- Protects staff, machinery and buildings against collision damage from service vehicles; dual function: can be used to separate walkways from trafficways and as impact barrier
- Allow the replacement of posts and guard rails without having to dismantle an adjacent section of the barrier
- Patented connection technology: a special energy-absorbing coupling system provides inceased protection
- Tested to withstand an impact of 14,400 joules
- Equals 4 t at 9 km/h at an impact angle of 45°
- Colour yellow/black

Description	Height	Length	Base plate	Diameter	Impact area	Ref. no.
	mm	mm	mm	mm	mm	
Line end post	1185		180 x 180	158	204 - 362	46-52808
In-line post	1185		180 x 180	158	204 - 362	46-52809
Corner post 90°	1185		180 x 180	158	204 - 362	46-52810
Set of horizon-		500		158 / 100 x 35	204 - 362	46-52811
tal profiles		1000		158 / 100 x 35	204 - 362	46-52812
		1500		158 / 100 x 35	204 - 362	46-52813
		2000		158 / 100 x 35	204 - 362	46-52814





Flexible impact barriers







Flexible bollards

- Manufactured from flexible plastic
- Yields when there is a collision, absorbs impact forces and returns to original upright position
- Impact absorption prevents damage to barriers, vehicles and floor, reducing maintenance and repair, eliminating downtime
- Yellow/black signal striping guarantees high visual impact
- For outdoor and indoor use
- Easy to install, supplied with fixing material
- Protects racking, machinery and buildings against collision damage
- Tested to withstand an impact of 7,600 joules
- Equals 7.8 t at 5 km/h at an impact angle of 45°
- Colour yellow/black

Height	Base plate	Diameter	Impact area	Ref. no.
mm	mm	mm	mm	
835	230 x 230	190	750	46-52786
1200	230 x 230	190	1200	46-52787

Flexible column and pole protectors

- Manufactured from flexible plastic
- Protect square and rectangular columns
- Stackable, interlocking, modular elements allow individual height adjustment
- Special rib structure absorbs impact energy and prevents dangerous damage to columns
- The modular column protection system consists of vellow corner elements and optional black spacers to ensure perfect adapation to column dimensions
- For outdoor and indoor use
- Fast and easy assembly without bolts
- Secures pillars and posts against collision damage
- Tested to withstand an impact of 1,600 joules
- Equals 2.1 t at 4.5 km/h at an impact angle of 45°
- Colour yellow

Description	Height	Length	Post dimensions	Diameter	Impact area	Ref. no.
	mm	mm	mm	mm	mm	
Spacers	600	100		180	520	46-52826
	600	150		180	520	46-52827
	600	300		180	520	46-52828
Flexible column	600		100 x 100	180	520	46-52815
and pole	600		150 x 150	180	520	46-52816
protectors	600		200 x 200	180	520	46-52817
	600		250 x 250	180	520	46-52818
	600		300 x 300	180	520	46-52819
	600		350 x 350	180	520	46-52820
	600		400 x 400	180	520	46-52821
	600		450 x 450	180	520	46-52822
	600		500 x 500	180	520	46-52823
	600		550 x 550	180	520	46-52824
	600		600 x 600	180	520	46-52825







- Manufactured from flexible plastic
- Yields when there is a collision and forms back into its original shape when obstacle is removed
- Impact absorption prevents damage to barriers, vehicles and floor, reducing maintenance and repair, eliminating downtime
- Yellow/black signal striping guarantees high visual impact
- For outdoor and indoor use
- Easy to install, supplied with fixing material

Flexible end-of-rack barriers

- Protects short sides of shelving and racking runs against collision damage
- Round design of posts reduces impact force, thereby minimising the potential for accidents and damage of a racking structure
- Innovative rotating pressure sleeves absorb and deflect impacts, transferring energy to the side
- Tested to withstand an impact of 8,400 joules
- Equals 6 t at 6 km/h at an impact angle of 45°
- Colour yellow/black

Length	Height	Base plate	Diameter	Impact area	Ref. no.
mm	mm	mm	mm	mm	
1100	512	230 x 230	190	185 - 405	46-52780
1200	512	230 x 230	190	185 - 405	46-52781
1300	512	230 x 230	190	185 - 405	46-52782
2400	512	230 x 230	190	185 - 405	46-52783
2500	512	230 x 230	190	185 - 405	46-52784
2600	512	230 x 230	190	185 - 405	46-52785









Flexible impact barriers










- Manufactured from flexible plastic
- Yields when there is a collision and forms back into its original shape when obstacle is removed
- Impact absorption prevents damage to barriers, vehicles and floor, reducing maintenance and repair, eliminating downtime
- Yellow/black signal striping guarantees high visual impact
- For outdoor and indoor use
- Easy to install, supplied with fixing material







Protection from front impacts



Tool kit for adjusting flexible buffer profiles

Flexible upright protectors

- Material plastic
- Colour yellow

Height	Upright type	Ref. no.
mm		
600	P1	46-45600
	P2	46-45601
	P3	46-45602
	P4-P6	46-45603





Tool kit for adjusting flexible buffer profiles, for flexible upright protectors

- Flexible upright protectors only be mounted with this tool kit. Please add this item to your order
- Material plastic

	Ref. no.
Tool kit for adjusting flexible buffer profiles for flexible upright protectors	46-45604

Impact protection barriers

Light duty steel barriers

- Delimit hazard zones from walkways and driveways for general pedestrian use and operational vehicle traffic, suited for light duty applications
- Suited for all purposes
- Curved steel tube construction with additional steel tube at knee height, epoxy-coated with yellow/black signal striping
- Tube Ø 48 mm, wallI thickness 2 mm, base plate 160 x 70 x 10 mm (L x W x H)
- Material steel
- Colour yellow/black

Dimensions H x L	
mm	
1000 x 1000	46-20600
1000 x 1500	46-20601
1000 x 2000	46-20602
Throughbolt anchors 12/120, suited for concrete floors, 4 floor anchors required per barrier	46-53527
Heavy duty floor anchors, 4 floor anchors required per barrier	



Wheel stop barriers

- Designed to protect inventory, shelving and racking, machinery, etc. against impact damage from light and heavy duty service vehicles
- Low construction height allows easy staff access to restricted areas
- Thick-walled steel tube with sloped ends, epoxy-coated with yellow/ black signal striping
- Tube Ø 76 mm, wallI thickness 3 mm, base plate 130 x 70 x 10 mm (L x W x H)
- Material steel
- Colour yellow/black

Dimensions H x L	Colour	Ref. no.	
mm			
86 x 400	yellow/black	46-20604	
86 x 800	yellow/black	46-20605	
86 x 1200	yellow/black	46-20606	
Heavy duty floor anchors, 4 floor anchors required per barrier	galvanised	46-20603	
Throughbolt anchors 12/120, suited for concrete floors, 4 floor anchors required per barrier	galvanised	46-53527	



Wheel stop barriers for corner areas

- Designed to protect inventory, shelving and racking, machinery, etc. against impact damage, in particular from heavy duty service vehicles and trucks
- Low construction height allows easy staff access to restricted areas
- Thick-walled steel tube with sloped ends, epoxy-coated with yellow/ black signal striping
- Made from steel
- Colour: yellow/black

Dimensions H x L	Colour	Ref. no.
mm		
86 x 638 / 638	yellow/black	46-53486
Heavy duty floor anchors, 8 floor anchors required per barrier	galvanised	46-20603
Throughbolt anchors 12/120, suited for concrete floors, 8 floor anchors required per barrier	galvanised	46-53527





Impact protection barriers





- Prevent collision damage from light duty and heavy duty service vehicles
- Protect your equipment and facilities, such as switchboards, gates, shelving and racking, machinery
- Curved, heavy duty steel tube, yellow epoxy-coating with black signal striping
- Tube Ø 76 mm, wallI thickness 3 mm, base plate 160 x 140 x 10 mm (L x W x H)

Dimensions H x L	Colour	Ref. no.	
mm			
350 x 375	yellow	46-20607	
350 x 750	yellow/black	46-20608	
350 x 1000	yellow/black	46-20609	
350 x 2000	yellow/black	46-53447	
600 x 750	yellow/black	46-20610	
600 x 1000	yellow/black	46-20611	
600 x 2000	yellow/black	46-53448	
1200 x 750	yellow/black	46-20612	
1200 x 1000	yellow/black	46-20613	
1200 x 2000	yellow/black	46-53449	
Heavy duty floor anchors, 8 floor anchors required per barrier	galvanised	46-20603	
Throughbolt anchors 12/120, suited for concrete floors, 8 floor anchors required per barrier	galvanised	46-53527	



Corner protection barriers

- Prevent collision damage from light duty and heavy duty service vehicles
- Protect your equipment and facilities, such as switchboards, gates, shelving and racking, machinery
- Curved, heavy duty steel tube, yellow epoxy-coating with black signal striping
- \blacksquare Tube Ø 76 mm, wallI thickness 3 mm, base plate 160 x 140 x 10 mm (L x W x H)

Dimensions H x L / L	Colour	Ref. no.
mm		
350 x 600 / 600	yellow/black	46-20614
600 x 600 / 600	yellow/black	46-20615
1200 x 600 / 600	yellow/black	46-20616
Heavy duty floor anchors, 12 floor anchors required per barrier	galvanised	46-20603
Throughbolt anchors 12/120, suited for concrete floors, 12 floor anchors required per barrier	galvanised	46-53527



- Designed to protect inventory, shelving and racking, machinery, etc. against impact damage from service vehicles and trucks, suited for light duty and particularly for heavy duty vehicles
- Extremely strong
- Hot-dip galvanised with additional epoxy-coating in yellow with black signal striping
- Thick-walled steel tube

Height	Diameter	Material thick- ness	Ref. no.
mm	mm	mm	
1200	90	3.6	46-20617
	159	4.5	46-20618
	194	4.5	46-20620
	273	5.0	46-20621
Heavy duty floor anchors, 14/110, for bollards Ø 90 and 159 mm, 4 floor anchors required per bollard	14		46-20619
Throughbolt anchors, 16/140, for bollards Ø 194 and 273 mm, 4 floor anchors required per bollard	16		41-20622





Shelving & racking protection

Upright protectors

- Provide protection against collision damage and prevent downtimes
- Epoxy-coating in signal yellow, RAL 1003, provides high visibility
- Bolt-on fixing to upright no floor fixing to prevent damage to flooring if upright is hit by a vehicle
- Designed to fit BITO pallet racking PRO
- Delivery includes fixing material
- Material steel



Scan this QR code:

Product video on upright protectors

www.bito.com/qr-stuetzenschutz-int

Height	Width	Upright type	Ref. no.
mm	mm		
715	80	P1	66-31000
	90	P2	66-31001
	100	P3	66-31002
	120	P4-6	66-31003



Column guards

- Compliant with the latest health and safety regulations stipulating that column guards must be fitted at the ends of each racking row
- Epoxy-coated in signal yellow, RAL 1003, yellow/black signal striping compliant to DIN 4844
- For 2 side and for 3 side protection
- Reliable protection of shelving and racking as well as service vehicles
- Clearly reduces damage to uprights and columns, thereby reducing idle times and costs
- Increased operator safety

Height mm	Description	Features	Upright type	Ref. no.
400	L-shaped for 2-sided protection	supplied with 4 heavy duty floor anchors Ø 12 mm	P1-P12	66-4585
	U-shaped for 3-sided	supplied with 4 chemical floor anchors	P1-P3	66-29123
	protection	M12	P4-P12	66-29125





More info on our upright types from page 186



Rack end barrier





Rack end barrier

- Protect short sides of shelving and racking runs and increase operator safety
- Since this barrier encloses both uprights of a frame, no extra column guards are required to protect the ends of a racking row
- Epoxy-coated in signal yellow, RAL 1003, yellow/black signal striping compliant to DIN 4844
- Galvanised steel sheet plank
- Delivery includes fixing material and heavy duty floor anchors
- Compliant with the latest health and safety regulations
- Clearly reduces damage to uprights and columns, thereby reducing idle times and costs
- A second steel plank can be added for increased safety

	Rack end barrier	Additional fencing planks
Dimensions L x D x H	Ref. no.	Ref. no.
_mm		
1200 x 270 x 400	66-40937	66-40933
2500 x 270 x 400	66-40936	66-40932



In-line posts for fencing rows

- The in-line post and additional fencing planks allow to extend barrier length as required
- Helps to set up longer fencing rows
- This sturdy barrier system protects warehouse and operating equipment from damage
- Supplied with heavy duty floor anchors

Dimensions L x D x H	Ref. no.
mm	
250 x 201 x 400	66-40924





Security mirrors

Perfect overview

■ Minimises security hazards and increases traffic safety on your site



Surveillance mirrors

- For indoor use
- Ideal for safeguarding production and storage environments
- Slight convex shape provides a clear view of a larger area
- In shatterproof acrylic (70% more shock resistant than glass)
- Supplied with telescopic wall fixing bracket
- Material acrylic

Diameter	Viewing distance	Ref. no.
mm	m	
300	1-4	46-39492
400	1-5	46-39493
500	5-7	46-39494
600	9-15	46-39495
700	12-17	46-39496
800	15-22	46-39497

Security mirrors

- Frame with yellow/black marking
- Yellow/black signal striping ensures increased level of attention, in compliance with the latest safety regulations for hazard areas in factories and warehouses
- Improved view of out-of-the-way workplaces, elimination of dead angles
- Helps to immediately discover accidents or production breakdowns
- Acrylic, brilliant vision, supplied with fixtures for wall mounting
- Material acrylic

Dimensions W x H	Viewing distance	Ref. no.
mm	m	
300 x 500	5-7	46-39485
400 x 600	7-9	46-39486
600 x 900	18-25	46-39487
Fixing bracket for mirrors suited for tubes Ø 50-80 mm		46-39488

Hemispherical mirrors 360°

- For indoor use
- Worthwhile investment into safety at work
- All-round visibility to secure trafficways, particularly at intersections of racking aisles
- Low proper weight, long service life
- Manufactured from lightweight and shockproof acrylic (70% more shock resistant than glass)
- Can be attached directly to the wall/ceiling or chain-fixed to ceiling (please order chain kit separately)
- Material acrylic

Diameter	Viewing distance	Ref. no.
mm	m	
600	6	46-39480
800	10	46-39481
1000	30	46-39482
1250	40	46-39483
Chain kit for hemispherical mirrors 4 chains, each 1000 mm long		46-39484











Display systems

Visual management

Improve communication efficiency!

Our new display systems are ideal for informing all persons concerned about organisational measures, safety regulations and produres to follow which will help you optimise office and warehouse workflows, thereby **saving time and money**. A lot of management strategies such as Lean Management, Kaizen, 5S or 7M use colour display systems for providing quick and easy access to information. Even complex processes and difficult instructions can be presented in an easy-to-understand way.

Our **display systems** can be used for a wide range of applications:

Display of notices, instructions and regulations.



Self-adhesive document holders

Signal colouring in compliance with DIN ISO 3864-4 to ensure high visibility of emergency exits, prohibitive signs and warning signs.



Self-adhesive document holders "Security"

For fire prevention instructions (red), machine operating instructions (blue) and substance hazard notices (orange).



Display systems







Self-adhesive document holders, magnetic pull-forward front

- Fully adhesive back provides durable fitting
- Magnetised closure is ideal for applications where frequent changes are required
- Holders have a high visibility colour frame in compliance with DIN 3864-4 on both sides and are therefore ideal for displaying info on glass doors
- Quick and easy access to information
- For horizontal or vertical display

Format	Colour	Pcs/ pack	Ref. no.
DIN A4	black	2	46-44462
	red	2	46-44463
	blue	2	46-44464
	orange	2	46-44465
	silver	2	46-44466
	black	10	46-44467
	red	10	46-44468
	blue	10	46-44469
	orange	10	46-44470
	silver	10	46-44471



Self-adhesive document holders "Security", magnetic pull-forward front, two colour frame

- Fully adhesive back provides durable fitting
- Magnetised closure is ideal for applications where frequent changes are required
- Holders have a high visibility colour frame in compliance with DIN 3864-4 on both sides and are therefore ideal for displaying info on glass doors
- Quick and easy access to information
- For horizontal or vertical display

Format	Colour	Pcs/ pack	Ref. no.
DIN A4	yellow/black	2	46-44472
	white/green	2	46-44473
	white/red	2	46-44474



Magnetic document holders, with magnetic backing

- One-colour frame, magnetised on all 4 sides
- Protects documents from dirt, dust and creases
- Ideal for use on whiteboards, planning boards or fix directly to racking and machinery
- Quick and easy access to information
- For horizontal or vertical display

Format	Colour	Pcs/ pack	Ref. no.
DIN A4	black	5	46-44478
	red	5	46-44479
	blue	5	46-44480
	orange	5	46-44481
	silver	5	46-44482





Display systems







- Two-colour frame, magnetised on all 4 sides
- Holders have a high visibility colour frame in compliance with DIN 3864-4
- Protects documents from dirt, dust and creases
- Ideal for use on whiteboards, planning boards or fix directly to racking and machinery
- Quick and easy access to information
- For horizontal or vertical display

Format	Colour	Pcs/ pack	Ref. no.
DIN A4	yellow/black	5	46-44483
	white/green	5	46-44484
	white/red	5	46-44485



Display systems, with 1-colour frame, wall-mounted

- Panel support from epoxy-coated metal
- 5 pockets (same colour) from flexible PP
- Capacity can be extended by adding extra units
- Kit complete with assembly instructions and fixing material

Format	Colour	Pcs/ pack	Ref. no.
DIN A4	red	Set	46-44450
	dark blue	Set	46-44451
	orange	Set	46-44452



Display systems, with frame in different colours, wall-mounted

- Panel support from epoxy-coated metal
- 10 pockets (assorted colours) from flexible PP
- Capacity can be extended by adding extra units
- Kit complete with assembly instructions and fixing material
- Ideal for displaying information related to diverse topics

Format	Delivery includes	Pcs/ pack	Ref. no.
DIN A4	2 pieces of each colour: black, red, yellow, green and dark blue	Set	46-44453



Display systems, with 1-colour frame and magnetic backing

- Panel support from epoxy-coated metal
- 5 pockets (same colour) from flexible PP
- Capacity can be extended by adding extra units
- Magnetic fixing to metallic surfaces such as shelving and racking, steel posts etc.

Format	Colour	Pcs/ pack	Ref. no.
DIN A4	black	Set	46-44454

TOP SELLER

6-5031




Document pockets

Self-adhesive, 3 sides open

- Ideal for frequent exchange of inserts
- Adhesive fabric backing provides strong adhesion
- Colour transparent


Dimensions L x W	Format	Pcs/ pack	Ref. no.
mm			
175 x 105		10	6-5031
210 x 75		10	6-31311
210 x 150	DIN A5	10	6-19528

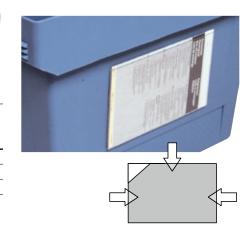

Self-adhesive, 2 sides open

- Slightly shorter ticket holder front allows to easily insert and remove cards
- Material vinyl
- Colour blue

Dimensions L x W	Pcs/ pack	Ref. no.
145 x 100	25	46-21108



Self-adhesive, 1 side open

- Document pocket with two self-adhesive strips
- Also suited for location marking on shelving and racking
- Durable adherence to all types of storage and transport bins and containers
- Material vinyl
- Colour blue

Dimensions L x W	Format	Pcs/ pack	Ref. no.
mm			
155 x 85		25	46-21109
235 x 170	DIN A5	25	46-21110



With U-type bridge, right side open

- Robust backing with folded U-type bridge (bridge width 25 mm)
- Easy and reliable fixing to all types of storage and transport containers
- Material vinyl
- Colour blue


Dimensions L x W	Format	Pcs/ pack	Ref. no.
165 x 115	DIN A6	25	46-21105
235 x 170	DIN A5	25	46-21106
305 x 230	DIN A4	25	46-21107




Document pockets














Document pockets, with wire fixing, open at top

- Easy to fix to wire-mesh pallet boxes, collars, plastic containers, cartons, etc.
- Earpieces laminated into pocket sides
- Optimum protection for documents/marking
- Material PVC
- Colour transparent

Dimensions L x W	Format	Description	Pcs/pack	Ref. no.
mm				
195 x 140	DIN A6 landscape	without top fold	25	46-40304
275 x 180	DIN A5 landscape	without top fold	25	46-21104
275 x 185	DIN A5 landscape	with top fold to keep off rain	25	46-40307
275 x 340	DIN A4 portrait	without top fold	25	46-40303
	DIN A4 portrait	with top fold to keep off rain	25	46-40305
325 x 235	DIN A4 landscape	without top fold	25	46-21111
	DIN A4 landscape	with top fold to keep off rain	25	46-40306

With magnetic backing, 1 side open

- Fixes immediately on any steel surface such as on beams, storage and transport containers or directly on stored goods
- Material vinyl
- Colour blue

Dimensions L x W	Format	Pcs/pack	Ref. no.
mm			
160 x 115	DIN A6	25	46-21100
235 x 170	DIN A5	25	46-21101
305 x 230	DIN A4	25	46-21102

i BITO info

More options in our webshop at shop.bito.com

With fixing flaps, open at top

- Insert flaps into pocket slashes, self-locking
- Very easy to fix and to remove
- Material vinyl
- Colour blue

Dimensions L x W	Format	Pcs/pack	Ref. no.
mm			
235 x 180	DIN A5	25	46-21103

With U-type bridge, 3 sides open

- Robust backing with folded U-type bridge (bridge width 25 mm)
- Easy and reliable fixing to all types of storage and transport containers
- Made from rigid PVC
- Colour: transparent

Dimensions L x W	Height of fold at top	Pcs/pack	Ref. no.
mm	mm		
105 x 78	16	25	46-40308
210 x 85	18	25	46-40309



Pallet foot sleeves, blue

- Instant load identification, quick removal and relocation
- With 4 label/barcode holders
- Made from PVC

Width	Height	Pcs/ pack	Ref. no.
mm	mm		
145	75	25	46-40310



Pallet foot sleeves, transparent

- Instant load identification, quick removal and relocation
- Seamless, rigid PVC sides provide excellent durability for frequent re-use
- With 1 label/barcode holder
- Made from rigid PVC
- Colour: transparent

Width	Height	Pcs/ pack	Ref. no.
mm	mm		
145	75	25	46-40311



Magnetic document pockets

- Neodymium magnets with an outstanding adhesive force keep pockets fixed to metal storage and transport containers, excellent for rough handling (outside use or during transport)
- Open top side
- Made from PVC


Dimensions L x W	Format	Height of fold at top	Pcs/ pack	Ref. no.
mm		mm		
160 x 125	DIN A6 landscape	40	25	46-40312
235 x 180	DIN A5 landscape	40	25	46-40313
325 x 245	DIN A4 landscape	40	25	46-40314
240 x 350	DIN A4 portrait	40	25	46-40315





Stock identification signs

- To allow customisation of your stock labels and tiles, please state your order number, quantities and requested message, barcodes and/or arrow position at time of order
- Barcodes and/or positioning marks etc. upon request
- **Black characters**
- Character size is adapted to label height

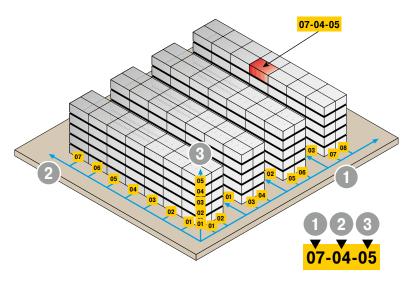

BITO info

... how to give your products a clear stock

Investing into a stock location system is relatively inexpensive and very rewarding from the organisational point of view as it helps you avoid unnecessary detours and cost intensive searching for a product. Systematic numbering of storage locations is the first step towards organising your warehouse. For this purpose, each storage location is defined by its racking row, bay number and storage level. These three coordinates provide a clear stock address and are the basis for manual and computerized warehouse management systems (see example).

In our example, the stock tile shows that a product is located in:

racking row = 07, bay = 04, level = 05



Stock labels

- Self-adhesive polyethylene foil
- Other label and font colours upon request
- Other formats for labels with barcode on request

Dimensions L x W	Colour	Ref. no.
mm		
120 x 30	yellow	46-20850
	white	46-20851
140 x 38	yellow	46-20852
	white	46-20853
220 x 58	yellow	46-20854
	white	46-20855




Stock identification signs

- Printed with 1 or 2 characters (numbers or letters)
- Rigid PVC foam board
- Supplied with 2 fixing springs
- Fonts are scalable for customised marking
- Special formats upon request

Dimensions L x W	Colour	Ref. no.
mm		
200 x 200	yellow	46-20856
	white	46-20857
300 x 300	yellow	46-20858
	white	46-20859
500 x 500	yellow	46-20860
	white	46-20861



Labels

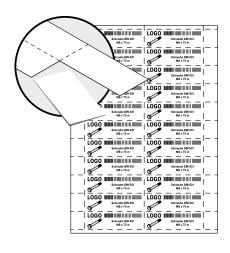



- Pre-perforated blank label sheets, ready for direct printing
- Suited for laser and inkjet printers
- On white DIN A4 sheets, 140 g/m²
- 25 sheets per pack
- Colour white

Suits		Dimensions W x H per label	Labels per pack	Ref. no.
		mm		
European size stacking containers XL	Euro stacking containers XL from size 400 x 300 mm	210 x 74	100	46-20778
Small parts containers KLT	Small parts containers KLT from size 400 x 300 mm	210 x 74	100	46-20778
Storage bins SK	SK1095	68,5 x 12,5	1600	46-20773
	SK1610	70,5 x 20	1000	46-20774
	SK2311, SK3521, SK3522	98 x 36	400	46-20775
	SK5031, SK5032/R	178 x 40	175	46-20776
	SK5031, SK5032/R	178 x 40	175	46-20776
	SK5033	178 x 56	125	46-20777
Storage and handling bins RK	RK*108	89 x 30	450	46-20767
	RK*109	84 x 39	375	46-20768
	RK*1509	115 x 39	250	46-20769
	RK*208	194 x 30	225	46-20770
	RK*209	192 x 39	175	46-20771
	RK*214	192 x 60	100	46-20772
Cross dividers	QT108, QT109	80 x 22	675	46-20766
	QT1509, QT208, QT209, QT214	98 x 36	400	46-20775
Self-adhesive ticket holders	BLD26*	85 x 26	550	46-20779
	BLD39*	84 x 39	375	46-20768
	BLD39*	115 x 39	250	46-20769
	BLD60*	192 x 60	100	46-20772








Magnetic pre-cut labels

- Fast marking with a felt marker, fixed in seconds
- Permanently magnetised
- Ideal for steel shelving and racking
- For durable and permanent marking, easy to remove for re-use
- Material magnetised foil
- Colour white

Length	Width	Pcs/ pack	Ref. no.
mm	mm		
80	25	50	46-10260
100	30	50	46-10261
150	50	50	46-10262



Magnetic labels on rolls

- 5-metre rolls, lengths to be cut on site as required
- Material magnetised foil
- Colour white

Length	Width	Pcs/ pack	Ref. no.
mm	mm		
5000	25	1	46-10263
	30	1	46-10264
	50	1	46-10265
	80	1	46-10266







For landscape and portrait documents

- Flexible envelope allows easy insertion and removal of documents
- Anti-glare surface ensures easy readability
- Framed in red, yellow or green to attract attention

Format	Dimensions L x W	Description	Colour	Pcs/ pack	Ref. no.
	mm				
DIN A5	235 x 180	3 strong adhesive	red	25	46-40325
		foam strips provide	yellow	25	46-40326
		excellent adhesion	green	25	46-40327
		3 strong magnetic strips provide excel-	red	25	46-40328
			yellow	25	46-40329
		lent adhesion	green	25	46-40330
DIN A4	325 x 240	3 strong adhesive foam strips provide excellent adhesion	red	25	46-40331
			yellow	25	46-40332
			green	25	46-40333
		3 strong magnetic strips provide excel-	red	25	46-40334
			yellow	25	46-40335
		lent adhesion	green	25	46-40336



Label holders



Pre-perforated print-on labels for your own printer on page 277

Self-adhesive ticket holders

- Scanner readable
- Supplied with label cards
- Material rigid PVC
- Colour transparent

Overall height	Carton height	Length	Pcs/pack	Ref. no.
mm	mm	mm		
28	26	85	50	46-18115
		200	50	46-16508
		950	10	46-16509
		1200	10	46-16510
		1290	10	46-16511
		1735	10	46-16512
41	39	200	50	46-16514
		1290	10	46-16515
		1735	10	46-16516
62	60	200	50	46-16518



Magnetic label pouches

- Ideal for frequent label replacement
- Two open sides allow convenient label positioning, front cover closes firmly on label
- Scanner-readable
- Delivery does not includes labels
- Material vinyl
- Colour yellow

Dimensions L x W	Pcs/pack	Ref. no.
mm		
97 x 25	100	46-10272
97 x 30	100	46-10273
97 x 58	100	46-10274
120 x 40	100	46-10275
137 x 58	100	46-36040

Magnetic label holders

- Immediate stock identification, label holders can be relocated together with your stock
- Full surface magnetised backing for immediate product marking
- Will also stick to message and planner boards
- Labels complete with label card and transparent cover strip
- Material C-profiles with magnetised reverse side
- Colour black

Length	Width	Pcs/pack	Ref. no.
mm	mm		
100	20	100	46-10267
	25	100	46-10268
	30	100	46-10269
	40	100	46-10270
	50	100	46-10271







Improve your workflow with BITO!







In order to make in-house transport as efficient as possible, BITO has selected a product range that is perfectly tuned to storage and order picking needs.

All our products have been selected for their excellent workmanship and superior quality.

We are proud to present our functional, easy to handle and field-tested range of hand pallet trucks, order picking trolleys, sack trucks and shelf trolleys.

We are sure you will find the products that perfectly fit your needs!

In-house transport



IN-HOUSE TRANSPORT

Contents

LEO Locative	282
Folding sack trucks	290
Tyre trucks	290
Sack trucks	291
Hand pallet trucks	292
TOTALSTOP central locking system	295
Transport dolly	296
Swan neck handle trolleys	297
Platform trucks with folding handle	298
Cash & Carry trolleys	299
Platform trucks with tubular handle	300
Four sided platform trucks	301
Platform trucks with wire mesh/wood panel sides .	302
Table trolleys	304
Plastic deck trolleys	304
Table trolleys	305
Shelf trolleys	307
Platform trolleys / Platform trucks /	
Table trolleys - Grey Edition	310
Shelf trolleys / Four sided platform trucks /	
Pallet trolleys - Grey Edition	
Platform trucks / Table trolleys / Shelf trolleys	
Platform trucks / Table trolleys / Shelf trolleys	
Order picking trolleys	
Roll containers with wire mesh sides	
Cantilever trolleys	318
Sheet material stands and trolleys	
Transport dolly	
Pallet dollies	321
Tipping skips	323
Roller conveyors	324
Skatewheel expandaveyors	329







More info about

LEO Locative

or on our website www.leo-locative.com

LEO Loca

LEO Locative — the driverless





Designed for containers and cartons sized 600 x 400 mm with a weight of up to 20 kg.



Plug & work -

LEO gets ready for operation without human intervention

Save time and money – no need for either WiFi

no need for either WiFi infrastructure or a central computer

Standardized stations

that are ready for use immediately after delivery





IN-HOUSE TRANSPORT



transport system for everybody



Twin station



Drop-off station

Pick-up station

Lane marking tape



LEO Locative set 1



- Starter package containing everything you need to put LEO on track
- This starter kit includes:
- 1 LEO Locative vehicle incl. battery
- 1 accessory kit #1: 1 battery-operated charger, 1 code marker & lane marking tape set #1: 1 lane marking tape "Flex" each in red, green and blue (130 m) and 1 lane marking tape "Robust" (25 m) in blue / 65 code markers for operations without transfer stations / 1 service cable for software updates / 1 converter package (international power adapter) / 1 tracking template - helps to maintain required distances and radii of a track

Туре	Ref. no.
LEO Locative set 1	80-45802

LEO Locative set 2





- Starter package with a pick-up and a drop-off station
- Can be used immediately following installation, a transfer station can be added
- This starter kit includes:
- 1 LEO Locative vehicle incl. battery
- 1 drop-off station
- 1 pick-up station
- 1 accessory kit #2: 1 battery-operated charger, 1 code marker & lane marking tape set #2: 1 lane marking tape "Flex" each in red, green and blue (260 m) and 1 lane marking tape "Robust" (25 m) in blue / 112 code markers for operations without transfer stations / 1 service cable for software updates / 1 converter package (international power adapter) / 1 tracking template helps to maintain required distances and radii of a track

Description	Ref. no.
drop-off on left side / pick-up on left side	80-45807
drop-off on left side / pick-up on right side	80-45806
drop-off on right side / pick-up on left side	80-45805
drop-off on right side / pick-up on right side	80-45803

LEO Locative set 3





- Starter package with 2 twin stations
- Can be used immediately following installation, a transfer station can be added
- This starter kit includes:
- 1 LEO Locative vehicle incl. battery
- 2 twin stations
- 1 accessory kit #2: 1 battery-operated charger, 1 code marker & lane marking tape set #2: 1 lane marking tape "Flex" each in red, green and blue (260 m) and 1 lane marking tape "Robust" (25 m) in blue / 112 code markers for operations without transfer stations / 1 service cable for software updates / 1 converter package (international power adapter) / 1 tracking template helps to maintain required distances and radii of a track

Description	Ref. no.
left-hand side	80-45808
Mix	80-45809
right-hand side	80-45804

LEO Locative vehicles

Delivery includes 1 LEO locative vehicle and 1 battery (without charger, code or tape markers).

Туре	Ref. no.
LEO Locative vehicles	80-45750



LEO Locative transfer stations

- **Drop-off station: LEO deposits loads**
- Pick-up station: LEO picks up loads
- Twin station: LEO deposits one bin and retrieves another
- The configuration of the station describes from which side LEO accesses the container.
- All stations must be operated with 230V mains voltage
- Delivery includes floor anchors

Туре	Description	Ref. no.
LEO Locative Drop-off	left-hand side, supplied assembled	80-45779
stations	right-hand side, supplied assembled	80-45778
LEO Locative Pick-up stations	left-hand side, supplied assembled	80-45781
	right-hand side, supplied assembled	80-45780
LEO Locative Twin	drop-off on left side / pick-up on right side, supplied assembled	80-45785
stations	drop-off on right side / pick-up on left side, supplied assembled	80-45784
	left-hand side, supplied assembled	80-45783
	right-hand side, supplied assembled	80-45782



LEO Locative buffer lanes

Description	Total length approx.	Ref. no.
	mm	
Buffer lane for drop-off stations	1200	80-45790
	2400	80-45791
Buffer lane for pick-up stations	1200	80-45788
	2400	80-45789









LEO Locative route monitoring



Decentralised route monitoring

- Allows distribution of goods to more than 500 in-house target points / LEOstations
- Job details are entered via tablet or scanner at a station terminal

Route monitoring via tablet:

- A target is entered using a tablet
- The route information is transmitted via Bluetooth or cable to the Smart Box at the pick-up station (= point of departure)
- LEO picks up bins & containers at a pick-up station
- The Smart Box communicates the route information to the LEO vehicle

Route monitoring via barcode:

- The barcode on a bin contains all target information
- A scanner that is mounted to the LEO station reads the barcode data; no human intervention is necessary
- The Smart Box of the LEO station communicates the target information to the LEO vehicle









In-house transport

LEO Locative vehicles








B LEO Locative Chargers



LEO Locative 24V mains plug



D LEO Locative track planning template



E LEO Locative station transmitter, bolt-less fitting



E LEO Locative Blue Spot



H Lane marking tape "flex"



Lane marking tape "robust"




LEO Locative lane marking tapes - ultra -

Pos.	Description		Ref. no.
A	LEO Locative Batteries 24V	The LEO Locative battery can be removed and recharged for shift work and can also be connected to the transfer stations to supply power., The battery can also be connected to the transfer stations to supply power.	80-45751
В	LEO Locative Chargers	additional charger - ideal for operations working with several LEO vehicles, the charger can be used for direct battery charging or can be connected to the external loading access of the LEO vehicle.	80-45752
C	LEO Locative 24V mains plug	connects LEO stations to power supply	80-48747
D	LEO Locative track plan- ning template	for easier tape laying	80-48742
B	LEO Locative station trans- mitter, boltless fitting	required for converting 1 twin station into 2 individual stations	80-48740
B	LEO Locative Blue Spot	optical warning system for LEO vehicles which prevents collisions and increases safety at work	80-54905
G	LEO Locative connector set "Twin stations"	This set is required to join a pick-up station with a drop-off station to make a twin station.	80-48741
M	Lane marking tape "flex"	8 x 33 m lane marking tape "Flex", easy to apply and to remove, for light-duty applications, blue	80-45774
		8 x 33 m lane marking tape "Flex", easy to apply and to remove, for light-duty applications, green	80-45773
		8 x 33 m lane marking tape "Flex", easy to apply and to remove, for light-duty applications, red	80-45772
	Lane marking tape "robust"	"robust" track tapes are intended for light and medium weight applications in regular-use areas. , blue	80-45777
		"robust" track tapes are intended for light and medium weight applications in regular-use areas. , green	80-45776
		"robust" track tapes are intended for light and medium weight applications in regular-use areas. , red	80-45775
0	LEO Locative lane marking tapes - ultra -	lane marking tape "ultra" is a very robust tape with a width of 150 mm, marking tape cannot be placed around a curve. For laying bends, we also offer curve and turnout elements., 25m straight	80-52145



Accessories







B LEO Locative Tablet stand



LEO Locative Handheld scanner



LEO Locative COM Box



E LEO Locative SMART BOX

Pos.	Description		Ref. no.
A	LEO Locative Tablet	tool to help users program routes as well as path and target points	80-55066
В	LEO Locative Tablet stand	ideal for positioning your tablet at your workplace; can be used as portable support or helps to mount tablet to wall	80-55067
C	LEO Locative Handheld scanner	Tool to enter target data. The barcode with the target information is affixed to the bins, the barcode scanner at the station transmits the data to the SMART Box.	80-55065
D	LEO Locative COM Box	the COM box is fitted into the LEO vehicle; it receives target information sent by the SMART box	80-53342
B	LEO Locative SMART BOX	the SMART box serves as link between the COM box and the input device that is used to feed in the target data for LEO	80-53341



Folding sack trucks



- Aluminium/steel construction with aluminium toe plate and high grade PVC fittings
- Elasticated retaining straps and cross strut for safe transport
- Toe plate and wheels fold away with one move, telescopic grip, ready to use within seconds

Polymer tyres

Ball bearing castors with trackless polymer tyres

Load ca- pacity	Height	Toe plate dim. L x W	Total width	Dimensions H x W x D folded	Castor Ø	Weight	Ref. no.
kg	mm	mm	mm	mm	mm	kg	
50	1030	300 x 385	390	595 x 390 x 50	127 x 30	3.20	22-21304
125	1090	320 x 480	488	765 x 488 x 64	170 x 35	5.20	22-21305

Pneumatic tyres

Ball bearing castors with pneumatic tyres

Load ca- pacity	Height	Toe plate dim. L x W	Total width	Dimensions H x W x D folded	Castor Ø	Weight	Ref. no.
kg	mm	mm	mm	mm	mm	kg	
250	1190	450 x 595	660	855 x 660 x 135	220 x 70	12.60	22-21306

Tyre trucks



- Pneumatic tyres 260 x 85 mm / solid rubber tyres 260 x 60 mm
- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007

Tyre trucks

- Designed to take up to 8 tyres
- Handles with integral brace grippers for convenient tyre handling

eumatic 22-21	1345
id rubber 22-43	3621

Sack trucks

- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- Pneumatic tyres 260 x 85 mm / solid rubber tyres 260 x 60 mm





Load capacity	Height	Total width	Toe plate dim. L x W	Tyre material	Ref. no.
kg	mm	mm	mm		
200	1150	570	250 x 320	solid rubber	22-43525
200	1150	570	250 x 320	pneumatic	22-21203



Load capacity 250 kg

Load capacity	Height	Total width	Toe plate dim. L x W	Tyre material	Ref. no.
kg	mm	mm	mm		
250	1150	590	150 x 400	solid rubber	22-43518
250	1150	590	150 x 400	pneumatic	22-21204

Load capacity 300 kg

Load capacity	Height	Total width	Toe plate dim. L x W	Tyre material	Ref. no.
kg	mm	mm	mm		
300	1300	580	250 x 320	solid rubber	22-43534
300	1300	580	250 x 320	pneumatic	22-13695

Board/panel trucks, standard version

Designed for moving large-sized sheet materials from wood or plastic, with additional support castors

Load capacity	Height	Total width	Toe plate dim. L x W	Tyre material	Ref. no.
kg	mm	mm	mm		
400	1430	680	500 x 200	solid rubber	22-43364
350	1440	680	500 x 200	pneumatic	22-21205



Hand pallet trucks

Ideal for lifting, moving and positioning heavy or awkward loads

Designed for in-house transport of palletised loads

i BITO info

Wheel materials and features

Nylon: for smooth floor surfaces, high resistance to chemicals, very low rolling friction

Solid rubber: for smooth and rough floor surfaces, quiet in use

Polyurethane: kind to floors, abrasion-resistant and non-marking, resilient, quiet in use



Hand pallet trucks

- Suited for the professional handling of palletised loads and mesh box pallets in demanding environments
- Turning angle 2 x 105°, tandem load rollers, stair climber rollers at fork tips
- Load capacity 2500 kg!

Load capacity	Width over forks	Fork dim. L x W	Load rollers made from	Swivel castors made from	Ref. no.
2500	540	1150 x 160	nylon	nylon	22-21227
			polyurethane polyurethane	solid rubber polyurethane	22-21229 22-21230



Hand pallet trucks, with short forks

- Suited for the professional handling of standard size palletised loads and mesh box pallets in demanding environments
- Easy to manoeuvre, with a rotation angle of the steering shaft of 2 x 105° the pallet truck is ideal for confined spaces
- Load capacity 2500 kg!

Load capacity	Width over forks	Fork dim. L x W	Load rollers made from	Swivel castors made from	Ref. no.
kg	mm	mm			
2500	540	600 x 160	nylon	solid rubber	22-39602
		800 x 160	polyurethane	solid rubber	22-39603
		900 x 160	polyurethane	solid rubber	22-39604



Hand pallet trucks, with long forks

- Suited for the professional handling of long palletised loads and mesh box pallets in demanding environments
- Easy to manoeuvre, with a rotation angle of the steering shaft of 2 x 105° the pallet truck is ideal for confined spaces
- Tandem load rollers

Load capacity	Width over forks	Fork dim. L x W	Load rollers made from	Swivel castors made from	Ref. no.
kg	mm	mm			
2000	540	1500 x 160	polyurethane	solid rubber	22-39605
		1800 x 160	polyurethane	solid rubber	22-39606
		2000 x 160	polyurethane	solid rubber	22-39607
		2500 x 170	polyurethane	polyurethane	22-39608

BITO

Hand pallet trucks, with speed control and parking brake

- Suited for the professional handling of palletised loads and mesh box pallets on loading ramps, ascending slopes and in lorries
- Very good vehicle stability on sloping floors
- Easy to manoeuvre, with a rotation angle of the steering shaft of 2 x 105° the pallet truck is ideal for confined spaces
- Tandem load rollers
- Load capacity 2500 kg!

Load capacity	Width over forks	Fork dim. L x W	Load rollers made from	Swivel castors made from	Ref. no.
kg	mm	mm			
2500	540	1150 x 160	polyurethane	solid rubber	22-39609

Hand pallet trucks, with digital scales, 5kg-scaling

- Ideal for transporting and weighing palletised loads and mesh box pallets
- High readability LCD display
- Weight is displayed 5 kg increments
- Weighing range 0 2000 kg
- Weighing accuracy 0 500 kg \pm 10 kg, 500 1.000 kg \pm 20 kg, 1.000 2.000 kg \pm 30 kg
- Battery operated (2 x 1.5 volt AA batteries)

Load capacity	Width over forks	Fork dim. L x W		Swivel castors made from	Ref. no.
kg	mm	mm			
2000	540	1150 x 160	polyurethane	polyurethane	22-39610



Hand pallet trucks, with digital scales, 1kg-scaling

- Ideal for transporting and weighing palletised loads and mesh box pallets
- High readability LCD display
- Weight is displayed 1 kg increments
- Weighing range 0 2000 kg
- Weighing accuracy ± 0,1%
- Battery operated (4 x 1.5 volt AA batteries)

Load capacity	Width over forks	Fork dim. L x W	Load rollers made from	Swivel castors made from	Ref. no.
kg	mm	mm			
2000	570	1150 x 180	polyurethane	polyurethane	22-21231

Hand pallet truck with scissor lift, with hydraulic manual release

- Designed to combine the functions of a hand pallet truck with a lift table for use with palletised loads, allow adjustment to optimum work height in production environments, at assembly stations and in dispatch services
- Steering wheels and load rollers from polyurethane
- Solid steel scissor legs ensure stability when elevated
- Three-position control handle for accelerated lifting speed, standard lifting speed and lowering
- Speed lift function for loads of up to 250 kg
- Safety valve provides overload protection

Load capacity	Width over forks	Lift height	Fork dim. L x W	External dimen- sions L x W x H	Ref. no.
kg	mm	mm	mm	mm	
1000	540	800	1150 x 160	1650 x 540 x 1235	22-39611



Hand pallet trucks



Manual stackers

- Ideal for occasional use, convenient stacking and moving palletised loads in in-house environments
- Steering wheels and load rollers from nylon
- Brake fitted to one steering wheel allows safe loading and unloading
- C-profiled mast with maintenance free, ball bearing cable and guide rollers for smooth operation of hand-crank winch
- Cable winch for precise height adjustment of forks
- Push handle for easy (re-)location

Load capacity	Width over forks	Lift height		External dimensions L x W x H	Ref. no.
kg	mm	mm	mm	mm	
300	580	1500	600 x 160	1020 x 710 x 1840	22-39612
500	580	1500	900 x 160	1320 x 710 x 1840	22-39613



Hydraulic stackers

- Designed for general lifting tasks and occasional inhouse transport of goods, for shelving & racking replenishment as well as lorry loading and unloading
- Steering wheels and load rollers from polyurethane
- Optimised wheel spacing provides high tilting stability
- 2 lifting speeds allow to lift loads of up to 100 kg in a much shorter time
- Castors with hardened steel centres for a long service life
- Pressure-relief valve provides overload protection

Load capacity	Width over forks	Lift height	Fork dim. L x W	External dimensions L x W x H	Ref. no.
kg	mm	mm	mm	mm	
500	200/770	1600	1150 x 100	1650 x 800 x 2000	22-39614
1000	570	900	1122 x 60	1675 x 765 x 1300	22-21232
		1600	1122 x 60	1675 x 765 x 1965	22-21233



Scissor lift table, mobile version

- Designed for in-house lifting, moving and positioning loads wherever required
- Tyres from polyurethane
- Brake fitted to one steering wheel allows safe loading and unloading
- Heavy duty construction with hard chrome plunger rod and overload protection
- Push handle for easy and ergonomic (re-)location
- Foot lever operated hydraulic lifting

Load capacity	Lift height	Table top L x W	External dimensions L x W x H	Ref. no.
kg	mm	mm	mm	
150	720	700 x 450	908 x 450 x 960	22-39615
300	880	850 x 500	1093 x 500 x 984	22-39616
500	880	850 x 500	1093 x 500 x 984	22-39617
750	1000	1000 x 510	1330 x 600 x 990	22-39618



TOTALSTOP central locking system

Innovative, convenient, ergonmically designed and safe!



- This new braking system can be operated with a simple push on the foot pedal
- The centrally fitted brake pedal is visible at first sight and can be accessed no matter how the wheels are positioned
- Rubber wheel lock works perfectly on all standard tyre materials
- All products bearing the TOTALSTOP logo can be supplied with this new braking system at an additional charge.
- Please state reference number of requested wheel diameter together with your trolley/truck

Suited for a platform width of	Ref. no.
500 mm	22-39594
600 mm	22-39595
700 mm	22-39596
800 mm	22-39597





Distribution trolleys now supplied with TPE tyres as standard

Easy and smooth transport

- All transport trolleys that have been supplied with solid rubber tyres are now supplied with TPE tyres as a standard feature at no extra charge.
- Tyres with TPE tread from thermoplastic elastomer have a lot of advantages on smooth floors
- Convenient, safe and quiet transport of loads, even heavy loads can be moved without effort
- Non-marking, dark coloured tread
- Compliant with the latest legislative requirements of the EU regulation 1272/2014 defining limit values for polycyclic aromatic hydrocarbons (PAH)
- Maintenance-free, deep groove ball bearing with both sides sealed
- Thread guard prevents loose threads from being wound around the axle



Swivel castor kit complete with 4 castors



- Instead of 2 swivel and 2 fixed castors (swivel castors with brake) the product is supplied with 4 swivel castors (2 braked)
- Maximum manoeuvrability into all directions

Description	Ref. no.
Swivel castor kit complete with 4 castors	22-39601













Transport dolly

plywood platform





Angled steel framework, powder coated in brilliant blue, RAL 5007

Transport dolly, no raised edge

- With 4 swivel castors (2 with brake), TPE tyres, low friction deep groove ball bearings
- Deck from beech wood laminate

Load capacity	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	
250	605 x 405	125	22-21200



Platform trucks with tubular handle, with raised edges on all sides

- With 4 swivel castors (2 with brake), TPE tyres, low friction deep groove ball bearings
- Beech laminate deck with 15 mm upstand all round

Load capacity	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	
250	605 x 405	125	22-21277



Transport dolly, with raised edges on all sides

- With 4 swivel castors (2 with brake), TPE tyres, low friction deep groove ball bearings
- Beech laminate deck with 15 mm upstand all round

Load capacity	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	
250	605 x 405	125	22-21276



General purpose trolley, with raised edges on all sides

- With 4 swivel castors (2 with brake), TPE tyres, low friction deep groove ball bearings
- Decks from beech wood laminate with 15 mm upstand all round

Load capacity	Toe plate L x W	Castor Ø	Description	Ref. no.
kg	mm	mm		
250	605 x 405	125	without push bar	22-21278
			with push bar	22-21279



Swan neck handle trolleys



Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing



EN 1757-3

Open-decked

- Designed for European size stacking containers: 1 x 600 x 400 mm or 2 x 400 x 300 mm
- Angled steel framework, powder coated in brilliant blue, RAL 5007

Load capac- ity	External dimensions L x W x H	Overall height	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
250	900 x 420 x 209	860	610 x 410	125	22-21280



With veneered particle deck, 1 level

- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- Deck from beech wood laminate

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
250	890 x 500 x 860	600 x 500	125	22-14003



With veneered particle deck, 2 levels

- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- Decks from beech wood laminate
- Shelf level heights 195/770 mm

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
250	860 x 450 x 875	600 x 450	125	22-14004



Platform trucks with folding handle





- Platform from pressed steel sheet
- Epoxy-coated in brillant blue, RAL 5007
- Glue-fixed anti-slip matting and protective edging all round
- Fold-down push handle with wide cross strut, powder coated finish, folding hinges galvanised
- 2 swivel and 2 fixed castors, swivel castors with brake, solid rubber tyres, castors with roller bearing
- Option with 4 swivel castors not possible

Load capac- ity	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Weight	Ref. no.
kg	mm	mm	mm	kg	
150	760 x 495 x 860	740 x 480	100	12.50	22-20305
250	920 x 630 x 860	910 x 610	125	18.50	22-20306

Platform with non-slip surface

- Sturdy, rounded edges
- Fold-down push handle with wide cross strut, galvanised hinges
- 2 swivel and 2 fixed castors, swivel castors with brake, solid rubber tyres, castors with roller bearing
- Option with 4 swivel castors not possible

	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Weight	Ref. no.
kg	mm	mm	mm	kg	
150	760 x 495 x 885	740 x 480	100	10.00	22-21303

Plywood platform

- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- Deck from beech wood laminate
- Fold-down push handle
- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing
- Optionally available with 4 swivel castors and TOTALSTOP central locking system

Load capac- ity	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Weight	Ref. no.
kg	mm	mm	mm	kg	
250	815 x 470 x 930	720 x 450	125	15.00	22-13714
	995 x 620 x 965	900 x 600	160	24.00	22-20012



Platform with checker plate surface

- Tubed framework, push handle and platform from aluminium
- Fold-down push handle
- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing
- Optionally available with 4 swivel castors and TOTALSTOP central locking system

Load capac- ity	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Weight	Ref. no.
kg	mm	mm	mm	kg	
200	815 x 470 x 930	720 x 450	125	10.00	22-21201
	995 x 620 x 965	900 x 600	160	17.00	22-21202



Cash & Carry trolleys



- Platform from resin coated plywood with slip-resistant texture
- Trolleys can be nested ideal for all locations with limited space
- Nesting saves 75% of the space that would be occupied by loaded trolleys
- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing





With platform

Load capacity	External dimensions L x W x H	Toe plate L x W	Wheel dimen- sions	Ref. no.
kg	mm	mm	mm	
400	1045 x 643 x 959	850 x 500	160 x 40	22-43122
500	1212 x 743 x 1004	1000 x 600	200 x 50	22-43123
	1212 x 843 x 1004	1000 x 700	200 x 50	22-43124



With 2 levels

- Shelf level height 265/775 mm = castor diameter 160 mm, shelf level height 310/820 mm = castor diameter 200 mm
- Load capacity of top shelf 80 kg

Load capacity	External dimensions L x W x H	Toe plate L x W	Wheel dimen- sions	Ref. no.
kg	mm	mm	mm	
400	1045 x 643 x 959	850 x 500	160 x 40	22-43125
500	1212 x 743 x 1004	1000 x 600	200 x 50	22-43126
	1212 x 843 x 1004	1000 x 700	200 x 50	22-43127



With loop handles

2 loop handles 680 mm high on swivel castor sides and 2 loop handles 500 mm high on fixed castor sides

Load capacity	External dimensions L x W x H	Toe plate L x W	Wheel dimen- sions	Ref. no.
kg	mm	mm	mm	
400	1045 x 643 x 949	850 x 500	160 x 40	22-43128
500	1212 x 743 x 990	1000 x 600	200 x 50	22-43129
	1212 x 843 x 990	1000 x 700	200 x 50	22-43130





Platform trucks with tubular handle





You will find this option on page 295

- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing
- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- **Deck from beech wood laminate**



Platform trolleys, plywood platform

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
250	1100 x 450 x 910	850 x 450	125	22-12895
	1250 x 600 x 910	1000 x 600	125	22-12896
400	1030 x 505 x 953	850 x 500	160	22-21206
	1180 x 705 x 953	1000 x 700	160	22-21207



Platform trucks with tubular handle, plywood platform


Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
500	975 x 509 x 958	850 x 500	160	22-14000
600	1125 x 609 x 990	1000 x 600	200	22-14001
	1125 x 709 x 990	1000 x 700	200	22-14007
	1325 x 809 x 990	1200 x 800	200	22-14002



BITO

Four sided platform trucks





- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- **■** Deck from beech wood laminate



Mesh sided platform trucks, 1 long side foldable

■ 50x50x4 mm square wire mesh infill, welded to framework

Load capac- ity	External dimensions L x W x H	Toe plate L x W	Useable height	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
600	1060 x 715 x 1069	1000 x 700	700	200	22-39549
	1260 x 815 x 1069	1200 x 800	700	200	22-39550



Mesh sided platform trucks, 1 long side foldable, foldable lid

- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- Deck from beech wood laminate

Load capac- ity	External dimensions L x W x H	Toe plate L x W	Useable height	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
600	1130 x 725 x 1113	1000 x 700	806	200	22-39553
	1330 x 825 x 1113	1200 x 800	806	200	22-39554



Panelled platform trucks, 1 long side foldable

Sides with plywood infill and beechwood finish

Load capac- ity	External dimensions L x W x H	Toe plate L x W	Useable height	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
600	1060 x 715 x 1069	1000 x 700	700	200	22-39551
	1260 x 815 x 1069	1200 x 800	700	200	22-39552



Panelled platform trucks, 1 long side foldable, foldable lid

- Sides and lid with plywood infill and beechwood finish
- Eyelet for padlock fitting

Load capac- ity	External dimensions L x W x H	Toe plate L x W	Useable height	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
600	1130 x 725 x 1113	1000 x 700	806	200	22-39555
	1330 x 825 x 1113	1200 x 800	806	200	22-39556







Platform trucks with wire mesh sides





You will find this option on page 295

- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing
- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- Deck from beech wood laminate
- Short and long sides with 50x50x4 mm rod infill
- Panel height on short sides and on long side 500 mm



Platform trucks with one short side, sides wire mesh infill

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
500	970 x 509 x 948	850 x 500	160	22-39518
600	1120 x 609 x 990	1000 x 600	200	22-39519
	1120 x 709 x 990	1000 x 700	200	22-39520
	1320 x 809 x 990	1200 x 800	200	22-39521



Platform trucks with two short sides, sides wire mesh infill

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
500	1030 x 509 x 948	850 x 500	160	22-39522
600	1180 x 609 x 990	1000 x 600	200	22-39523
	1180 x 709 x 990	1000 x 700	200	22-39524
	1380 x 809 x 990	1200 x 800	200	22-39525



Platform trucks with three sides, sides wire mesh infill

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
500	1030 x 509 x 948	850 x 500	160	22-39526
600	1180 x 609 x 990	1000 x 600	200	22-39527
	1180 x 709 x 990	1000 x 700	200	22-39528
	1380 x 809 x 990	1200 x 800	200	22-39529




Platform trucks with four sides, sides wire mesh infill

One long-side panel can be removed

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
500	1030 x 509 x 948	850 x 500	160	22-39530
600	1180 x 609 x 990	1000 x 600	200	22-39531
	1180 x 709 x 990	1000 x 700	200	22-39532
	1380 x 809 x 990	1200 x 800	200	22-39533

Platform trucks with wood panel sides







■ Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007

EN 1757-3 You will find this option on page 295

- Platform and front end/side panels from beech laminate
- Panel height on short sides and on long side 500 mm

Platform trucks with one short side, sides from wood laminate

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
500	970 x 509 x 948	850 x 500	160	22-21329
600	1120 x 609 x 990	1000 x 600	200	22-21330
	1120 x 709 x 990	1000 x 700	200	22-21331
	1320 x 809 x 990	1200 x 800	200	22-21332



Platform trucks with two short sides, sides from wood **laminate**

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
500	1030 x 509 x 948	850 x 500	160	22-21333
600	1180 x 609 x 990	1000 x 600	200	22-21334
	1180 x 709 x 990	1000 x 700	200	22-21335
	1380 x 809 x 990	1200 x 800	200	22-21336



Platform trucks with three sides, sides from wood laminate

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
500	1030 x 509 x 948	850 x 500	160	22-21337
600	1180 x 609 x 990	1000 x 600	200	22-21338
	1180 x 709 x 990	1000 x 700	200	22-21339
	1380 x 809 x 990	1200 x 800	200	22-21340



Platform trucks with four sides, sides from wood laminate

One long-side panel can be removed

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
500	1030 x 509 x 948	850 x 500	160	22-21341
600	1180 x 609 x 990	1000 x 600	200	22-21342
	1180 x 709 x 990	1000 x 700	200	22-21343
	1380 x 809 x 990	1200 x 800	200	22-21344





Table trolleys

with steel shelves







- 2 swivel and 2 fixed castors, swivel castors with brake, solid rubber tyres
- Fixed steel tube push handle
- Steel sheet decks with glue-fixed anti-slip matting
- Option with 4 swivel castors not possible

2 levels and 2 handles

Load capacity of top shelf 60 kg

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
120	760 x 495 x 860	740 x 480	140, 655	100	22-21307

3 shelf levels, 2 handles

■ Load capacity of top shelf / intermediate shelf level 60 kg

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
120	760 x 495 x 860	740 x 480	140, 390, 655	100	22-21308

Plastic deck trolleys





- Supplied with 2 swivel and 2 fixed castors, solid rubber tyres
- Decks moulded in polypropylene, with anti-slip surface, colour blue
- Option with 4 swivel castors not possible

1 level

Fold-down handle with broad cross brace and hinges, galvanised

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
200	815 x 540 x 890	810 x 500	125	22-37595

2 levels


- Double deck table trolley, with fitted push handle, galvanised
- Shelf level heights 185 and 715 mm
- Overall height 890 mm

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
200	815 x 540 x 890	810 x 500	125	22-37594

BITO

Table trolleys

with multiplex shelves



- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- Decks from beech wood laminate





You will find this option on page 295



2 levels and 2 handles

■ Load capacity of top shelf 80 kg

Load capacity	Shelf level heights	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
200	209, 826	1030 x 500 x 1020	850 x 500	125	22-21208
		1180 x 600 x 1020	1000 x 600	125	22-21209

3 shelf levels, 2 handles

■ Load capacity of top shelf / intermediate shelf level 80 kg

Load capacity	Shelf level heights	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
200	209, 515, 826	1030 x 500 x 1020	850 x 500	125	22-21282
		1180 x 600 x 1020	1000 x 600	125	22-21283

2 levels and 1 handle

■ Load capacity of top shelf 120 kg

Load capacity	Shelf level heights	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
400	233, 736	970 x 505 x 968	850 x 500	160	22-21210
		1120 x 705 x 968	1000 x 700	160	22-21211

3 shelf levels and 1 handle

■ Load capacity of top shelf / intermediate shelf level 120 kg

Load capacity	Shelf level heights	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
400	233, 485, 736	970 x 505 x 968	850 x 500	160	22-21284
		1120 x 705 x 968	1000 x 700	160	22-21285





Table trolleys

with multiplex shelves





You will find this option on page 295









- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing
- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- **Decks from beech wood laminate**

2 lipped shelves and 1 handle

- Load capacity of top shelf 80 kg
- Drop-in levels fitted into steel angle framework with 12 mm upstand

Load capacity	Shelf level heights	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
300	200, 820	985 x 500 x 1040	850 x 500	125	22-21216
		1135 x 600 x 1040	1000 x 600	125	22-12897

3 lipped shelf levels and 1 handle

- Load capacity of top shelf / intermediate shelf level 80 kg
- Drop-in levels fitted into steel angle framework with 12 mm upstand

Load capacity	Shelf level heights	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
300	200, 510, 820	985 x 500 x 1040	850 x 500	125	22-21217
		1135 x 600 x 1040	1000 x 600	125	22-12898

2 levels and 1 handle

Load capacity of top shelf 200 kg

Load capacity	Shelf level heights	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
500	228, 860	1047 x 509 x 860	850 x 500	160	22-21212
600	270, 900	1197 x 609 x 900	1000 x 600	200	22-21213
		1197 x 709 x 900	1000 x 700	200	22-21214
		1397 x 809 x 900	1200 x 800	200	22-21215


3 shelf levels and 1 handle

Load capacity	Shelf level heights	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
500	228, 544, 860	1047 x 509 x 860	850 x 500	160	22-21286
600	270, 585, 900	1197 x 609 x 900	1000 x 600	160	22-43047
		1197 x 709 x 900	1000 x 700	200	22-21287
		1397 x 809 x 900	1200 x 800	200	22-21288





Shelf trolleys




- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- Decks from beech wood laminate
- Levels are adjustable on a 100 mm pitch
- Shelf load capacity 90 kg





You will find this option on page 295





Load capacity	Shelf level heights	sions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
500	228, 628, 1028	1019 x 509 x 1111	850 x 500	160	22-21218
600	269, 669, 1069	1169 x 609 x 1152	1000 x 600	200	22-21234
		1169 x 709 x 1152	1000 x 700	200	22-21235
		1369 x 809 x 1152	1200 x 800	200	22-21236



4 levels

Load capacity	Shelf level heights	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
500	228, 628, 1028, 1428	1019 x 509 x 1511	850 x 500	160	22-21219
600	269, 669, 1069, 1469	1169 x 609 x 1552	1000 x 600	200	22-21220
		1169 x 709 x 1552	1000 x 700	200	22-21221
		1369 x 809 x 1552	1200 x 800	200	22-21237



4 levels

Load capacity	Shelf level heights	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
600	269, 669, 1069, 1469	1169 x 609 x 1800	1000 x 600	200	22-21238
		1169 x 709 x 1800	1000 x 700	200	22-21239
		1369 x 809 x 1800	1200 x 800	200	22-21240



307

5 levels

Load capacity	Shelf level heights	External dimen- sions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
600	269, 569, 869, 1169, 1469	1169 x 609 x 1800	1000 x 600	200	22-21241
		1169 x 709 x 1800	1000 x 700	200	22-21242
		1369 x 809 x 1800	1200 x 800	200	22-21243





Shelf trolleys

with steel tube sides







You will find this option on



- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing
- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- **Decks from beech wood laminate**
- Levels are adjustable on a 100 mm pitch
- Shelf load capacity 90 kg

4 levels

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
600	1169 x 609 x 1800	1000 x 600	269, 669, 1069, 1469	200	22-21297
	1169 x 709 x 1800	1000 x 700	269, 669, 1069, 1469	200	22-21298
	1369 x 809 x 1800	1200 x 800	269, 669, 1069, 1469	200	22-21299

5 levels

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	
600	1169 x 609 x 1800	1000 x 600	269, 569, 869, 1169, 1469	200	22-21300
	1169 x 709 x 1800	1000 x 700	269, 569, 869, 1169, 1469	200	22-21301
	1369 x 809 x 1800	1200 x 800	269, 569, 869, 1169, 1469	200	22-21302

Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with

■ Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007

Short sides and 1 long side with 100x100x5 mm rod infill

Shelf trolleys


sides wire mesh infill











Decks from beech wood laminate

Shelf load capacity 90 kg

TPE tyre and deep groove ball bearing

Levels are adjustable on a 100 mm pitch

Load capacity	External dimensions L x W x H	Toe plate L x W	Shelf level heights	Ref. no.
kg	mm	mm	mm	
600	1169 x 709 x 1800	1000 x 700	269, 669, 1069, 1469	22-39539
	1369 x 809 x 1800	1200 x 800	269, 669, 1069, 1469	22-39540

Short sides and 1 long side with wire-mesh infill

Load capacity	External dimensions L x W x H	Toe plate L x W	Shelf level heights	Ref. no.
kg	mm	mm	mm	
600	1169 x 709 x 1800	1000 x 700	269, 669, 1069, 1469	22-39541
	1369 x 809 x 1800	1200 x 800	269, 669, 1069, 1469	22-39542

00	U

t B

Shelf trolleys

with foldable shelf levels

- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing
- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- 3-piece levels from waterproof plywood fitted with piano hinges along the folding line, bolted to angled support profiles
- Folded shelf level safely catches in the grooves of the angled support profiles to prevent accidental unfolding







You will find this option on page 295





Shelf trolleys, with foldable shelf levels

All sides open

Load capacity	External dimensions L x W x H	Toe plate L x W	Shelf level heights	Ref. no.
kg	mm	mm	mm	
600	1169 x 709 x 1800	1000 x 700	269, 669, 1069, 1469	22-39543
	1369 x 809 x 1800	1200 x 800	269, 669, 1069, 1469	22-39544

Shelf trolleys, with wire-mesh sides and foldable shelf levels

■ Short sides and 1 long side with 100x100x5 mm rod infill

Load capacity	External dimensions L x W x H	Toe plate L x W	Shelf level heights	Ref. no.
kg	mm	mm	mm	
600	1169 x 709 x 1800	1000 x 700	269, 669, 1069, 1469	22-39545
	1369 x 809 x 1800	1200 x 800	269, 669, 1069, 1469	22-39546

Shelf trolleys

with inclined shelves

- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing
- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- Decks from beech wood laminate
- Inclined shelf levels are adjustable on a 120 mm pitch
- Levels can be fitted in a straight position or in an inclined position with a 15° or a 30° slope
- Shelf load capacity 80 kg
- Drop-in levels fitted into steel angle framework with 15 mm upstand on long sides

2 adjustable shelf levels

		Shelf trolleys	Inclined shelves		
Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.	Ref. no.
kg	mm	mm	mm		
500	1430 x 620 x 1560	1250 x 610	200	22-21322	22-21324
	1830 x 620 x 1560	1650 x 610	200	22-21323	22-21325

3 adjustable shelf levels

				Shelf trolleys	Inclined shelves
Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.	Ref. no.
kg	mm	mm	mm		
500	1430 x 620 x 1800	1250 x 610	200	22-21326	22-21324
	1830 x 620 x 1800	1650 x 610	200	22-21327	22-21325



You will find this option on page 295







Platform trolleys / Platform trucks / Table trolleys - Grey Edition





EN 1757-3

You will find this option on page 295





Platform trolleys - Grey Edition, plywood platform

- Welded steel tube construction, epoxy-coated in anthracite grey, RAL 7016
- Wood laminate deck with grey surface finish
- Handle can be bolt-fitted
- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing

Load capacity	External dimensions L x W x H	Toe plate L x W	Wheel dimensions	Ref. no.
kg	mm	mm	mm	
250	1100 x 450 x 910	850 x 450	125 x 32	22-53146
	1250 x 600 x 910	1000 x 600	125 x 32	22-53147

Platform trucks with tubular handle - Grey Edition

- Welded steel tube construction, epoxy-coated in anthracite grey, RAL 7016
- Wood laminate deck with grey surface finish
- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing

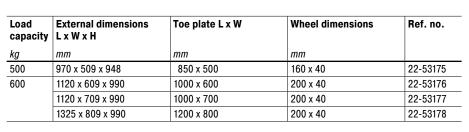




Table trolleys - Grey Edition, with multiplex shelves

- Welded steel tube construction, epoxy-coated in anthracite grey, RAL 7016
- Decks from wood laminate with 12 mm upstand all round, surface colour grey
- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing
- Load capacity of top shelf 80 kg



Load capacity	Shelf level heights	External dimensions L x W x H	Toe plate L x W	Wheel dimensions	Ref. no.
kg		mm	mm	mm	
300	200, 510, 820	985 x 500 x 1040	850 x 500	125 x 32	22-53181
		1135 x 600 x 1040	1000 x 600	125 x 32	22-53182
	200, 820	985 x 500 x 1040	850 x 500	125 x 32	22-53179
		1135 x 600 x 1040	1000 x 600	125 x 32	22-53180



Shelf trolleys / Four sided platform trucks / Pallet trolleys - Grey Edition





You will find this option on page 295



Shelf trolleys - Grey Edition

- Welded steel tube construction, epoxy-coated in anthracite grey, RAL 7016
- Decks from wood laminate, surface colour grey
- Levels are adjustable on a 100 mm pitch
- Load capacity per shelf level 90 kg
- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing

Load capacity	Shelf level heights	External dimensions L x W x H	Toe plate L x W	Wheel dimensions	Ref. no.
kg		mm	mm	mm	
600	269, 669, 1069, 1469	1169 x 609 x 1800	1000 x 600	200 x 40	22-53202
		1169 x 709 x 1800	1000 x 700	200 x 40	22-53203
		1369 x 809 x 1800	1200 x 800	200 x 40	22-53204

Four sided platform trucks - Grey Edition, sides with rod infill

- Angled steel framework with tubular push handle, short sides, 1 long side and top panel with welded mesh infill 40 x 40 x 4 mm, powder coating in RAL 7016 anthracite grey
- 2 hinged doors to close open long side, angled steel framework with welded grid infill
- Espagnolette bolt with door lever handle and cylinder lock
- 1 fitted and 4 adjustable shelf levels from rigid, heavy duty sandwich board, colour: medium grey
- Load capacity per shelf level 90 kg
- Maximum handling convenience: very low roller friction for smooth starts, easy and low-noise running and low swivel resistance on even surfaces
- 2 swivel and 2 fixed castors, swivel castors with TOTALSTOP brake as standard feature, thermoplastic elastomer tyres (TPE), precision deep groove ball bearing

Load capacity	Shelf level heights	External dimensions L x W x H	Toe plate L x W	Wheel dimensions	Ref. no.
kg		mm	mm	mm	
750	292, 582, 882, 1182,	1170 x 745 x 1792	1000 x 680	200 x 40	22-53200
1482	1482	1370 x 845 x 1792	1200 x 780	200 x 40	22-53201





Pallet dollies - Grey Edition, with location lugs

- Angled steel framework, powder coated in anthracite grey, RAL 7016, with 4 location lugs
- Supplied with 2 swivel and 2 fixed castors, swivel castors with brake

Load capacity	External dimensions L x W x H	Toe plate L x W	Wheel dimensions	Ref. no.
kg	mm	mm	mm	
750	1255 x 855 x 329	1210 x 810	200 x 40	22-53163





Platform trucks / Table trolleys / Shelf trolleys

electrically conductive version (ESD)





You will find this option on page 295

- Welded, electrically conductive steel tube construction, epoxy-coated in slate grey, RAL 7015
- Shelf levels from electrically conductive laminate, compliant to DIN 68765, colour: light grey
- **ESD** version protects your goods from electrostatic discharge
- 2 swivel and 2 fixed castors, swivel castors with brake, electrically conductive tyres from thermoplastic elastomers (TPE ESD), hubs with deep groove ball bearing



Platform trucks with tubular handle, electrically conductive version (ESD)

Load capacity	External dimensions L x W x H	Toe plate L x W	Shelf level heights	Wheel di- mensions	Ref. no.
kg	mm	mm	mm	mm	
500	970 x 509 x 950	850 x 500	235	160 x 40	22-43191
600	1120 x 609 x 990	1000 x 600	276	200 x 50	22-43192
	1120 x 709 x 990	1000 x 700	276	200 x 50	22-43193
	1320 x 809 x 990	1200 x 800	276	200 x 50	22-43194



ESD table trolleys, 2 levels and 1 handle

■ Load capacity top deck 200 kg

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Wheel di- mensions	Ref. no.
kg	mm	mm	mm	mm	
500	1040 x 509 x 867	850 x 500	235, 867	160 x 40	22-43187
600	1390 x 809 x 908	1200 x 800	276, 908	200 x 40	22-43190
	1190 x 709 x 908	1000 x 700	276, 908	200 x 40	22-43189
	1190 x 609 x 908	1000 x 600	276, 908	200 x 40	22-43188




Shelf trolleys - ESD version, 5 levels

- 1 fitted and 4 adjustable shelf levels from electrically conductive beechwood laminate in compliance with DIN 68765, colour: grey
- Shelf levels can be adjusted in height on a 100 mm pitch
- Load capacity per shelf level 50 kg

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Wheel di- mensions	Ref. no.
kg	mm	mm	mm	mm	
600	1169 x 609 x 1800	1000 x 600	276, 576, 876, 1176, 1476	200 x 40	22-43214
	1169 x 709 x 1800	1000 x 700	276, 576, 876, 1176, 1476	200 x 40	22-43215
	1369 x 809 x 1800	1200 x 800	276, 576, 876, 1176, 1476	200 x 40	22-43216

Platform trucks / Table trolleys / Shelf trolleys

for heavy loads up to 1200 kg



- Decks from plywood with non-slip moisture resistant resin coating
- **Designed for heavy loads**
- Castors with non-marking tyres from solid elastic rubber on ball bearing hubs can easily be moved into any direction and have very low rolling friction
- Supplied with 2 swivel and 2 fixed castors, swivel castors with brake, non-marking tyres from blue-grey elastic rubber on ball bearing hub





You will find this option on page 295



Platform trucks with one short side, with plywood deck

- Short side from plywood with moisture resistant plywood coating
- Front panel height 500 mm

Load capac- ity	External dimensions L x W x H	Toe plate L x W	Shelf level heights	Wheel di- mensions	Ref. no.
kg	mm	mm	mm	mm	
1200	1155 x 700 x 1005	1000 x 700	283	200 x 50	22-43319
	1355 x 800 x 1005	1200 x 800	283	200 x 50	22-43320
	1755 x 800 x 1005	1600 x 800	283	200 x 50	22-43321
	2155 x 800 x 1005	2000 x 800	283	200 x 50	22-43322



Table trolleys, 2 levels and 1 handle

- Rectangular decks from plywood with non-slip moisture resistant resin coating
- Load capacity top deck 500 kg

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Wheel di- mensions	Ref. no.
kg	mm	mm	mm	mm	
1200	1210 x 700 x 925	1000 x 700	283, 925	200 x 50	22-43324
	1410 x 800 x 925	1200 x 800	283, 925	200 x 50	22-43325
	1810 x 800 x 925	1600 x 800	283, 925	200 x 50	22-43326
	2210 x 800 x 925	2000 x 800	283, 925	200 x 50	22-43327



Shelf trolleys, 4 levels

- 1 fitted and 3 adjustable shelf levels from resin coated plywood with slip-resistant coating on one side and smooth the other side
- Shelf levels can be adjusted in height on a 100 mm pitch
- Load capacity per shelf level 180 kg

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Wheel di- mensions	Ref. no.
kg	mm	mm	mm	mm	
1200	1173 x 700 x 1583	1000 x 700	283, 688, 1088, 1488	200 x 50	22-43332
	1373 x 800 x 1583	1200 x 800	283, 688, 1088, 1488	200 x 50	22-43333





Order picking trolleys

modular system



- Multifunctional, modular system with clip-on and bolt-on fittings
- Robust framework made from steel profiles/steel tubes, zinc plated
- Short sides with wire-mesh infill welded to frame, mesh width 100 x 50 mm, both short sides are linked with 2 struts for added rigidity
- Bottom deck with wire-mesh infill welded to the frame, mesh width 120 x 30 mm
- 2 push handles can be bolt-fixed vertically at the requested height to one short end panel
- 4 low friction swivel castors, 2 with brake, TPE tyres on plastic centre, hubs with deep groove ball bearing
- 4 bumpers from thermoplastic polyurethane (TPU) fitted to swivel castors






Order picking trolleys - modular system, standard version

Load capacity	Toe plate L x W	External dimensions L x W x H	Wheel dimen- sions	Ref. no.
kg	mm	mm	mm	
200	650 x 510	891 x 590 x 1225	125 x 32	22-48560
		891 x 590 x 1625	125 x 32	22-48563
300	850 x 610	1091 x 690 x 1225	125 x 32	22-48561
		1091 x 690 x 1625	125 x 32	22-48564
		1091 x 690 x 1825	125 x 32	22-48566
	1250 x 610	1491 x 690 x 1225	125 x 32	22-48562
		1491 x 690 x 1625	125 x 32	22-48565
		1491 x 690 x 1825	125 x 32	22-48567

Accessories







B Back cladding



Memo board



Marking board



In-house transport











Tow bar and coupling pin

Wire dividers

G Wire dividers

Access steps







Guide roller

Scanner holder

K Bottle holder

Pos.	Description		Toe plate L x W	Height	Pcs/pack	Ref. no.
			mm	mm		
A	Shelf levels with	120 x 30 mm wired shelf levels, zinc plated, with 23 mm upward fold on one	650 x 510		1	22-48572
	wire-mesh infill	long side, on the other long side with 23 mm downward fold, adjustable on a	850 x 610		1	22-48573
		100 mm pitch in straight or tilted position	1250 x 610		1	22-48574
В	Back cladding		650 x 510	1225	1	22-48586
		zinc plated	650 x 510	1625	1	22-48589
		8	850 x 610	1225	1	22-48587
			850 x 610	1625	1	22-48590
			850 x 610	1825	1	22-48592
			1250 x 610	1225	1	22-48588
			1250 x 610	1625	1	22-48591
			1250 x 610	1825	1	22-48593
C	Memo board	from steel sheet with epoxy coating in light grey, RAL 7035, can be fitted at any height on short side panel, supplied with paper clip, angle of incline can be adjusted with wire holder			1	22-48568
D	Marking board	from steel sheet with epoxy coating in matt black, can be fitted at any height on short side panel, suited for chalk writing, supplied with paper clip			1	22-48569
	Tow bar and	allows trains of 3 picking trolleys max., supplied with 2 fixed castors instead	width 510		1	22-48578
	coupling pin	of 2 swivel castors without brakes, tow bar from flat rolled steel, pressure- springs automatically lift towing bar into vertical position when not in use, heavy duty coupling pin on opposite short side, trucks/dollies can be linked to each other with a foot operated mechanism, cannot be combined with steps, max. towing speed 6 km / h	width 610		1	22-48579
A	Wire dividers,	slide-on fitting, wire mesh infill welded to frame, zinc plated	width 510		1	22-48584
	for wired trolley platforms		width 610		1	22-48585
G	Wire dividers, for		width 510		1	22-48582
	wire-mesh shelving		width 610		1	22-48583
M	Access steps	tubular steel framework, antislip melamine treads, treads stand firmly on the	width 510		1	22-48580
		ground as soon as weight is applied thus immobilising the access steps, a safety catch prevents the trolley from tilting, a gas spring helps to fold the step flat to the trolley, steps are supplied with a pair of deeper loop handles for added handling convenience, total length increases by 100 mm, cannot be combined with tow bar and tow coupling, 3 treads, uppermost tread at a height of 600 mm, reach height approx. 2800 mm	width 610		1	22-48581
O	Guide roller	a spring loaded arm with a fifth TPE tyred castor provides directional stability,	650 x 510		1	22-48575
		on-the-spot turning remains possible	850 x 610		1	22-48576
			1250 x 610		1	22-48577
9	Scanner holder	from steel sheet with epoxy coating in light grey, RAL 7035, many fitting positions at the rear and on the sides, punched tube profile with grip clamp to fix scanner pocket, can be positioned anywhere along push handle, scanner pocket size 120 x 87 x 150 mm (WxDxH), front opening: 40 mm wide			1	22-48571
K	Bottle holder	steel holder with plastic strapping, strong and flexibel, suited for all standard beverage bottles and cans from 0.33 to 1.5 litres			1	22-48570



Order picking trolleys



- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing
- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- Decks from beech wood laminate
- Treads at the front end that retract when not in use and stand firmly on the ground as soon as weight is applied thus immobilising the access steps



2 levels

Load capacity of top shelf 80 kg

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Height of upper- most tread	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	mm	
250	1322 x 611 x 1155	1000 x 600	200, 820	504	125	22-17612



3 levels

■ Load capacity of top shelf / intermediate shelf level 80 kg

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Height of upper- most tread	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	mm	
250	1322 x 611 x 1155	1000 x 600	200, 510, 820	504	125	22-21222



3 levels

Load capacity of top shelf / intermediate shelf level 80 kg

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Height of upper- most tread	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	mm	
250	1322 x 611 x 1880	1000 x 600	200, 825, 1445	928	125	22-17613



4 levels


Load capacity of top shelf / intermediate shelf level 80 kg

Load capacity	External dimen- sions L x W x H	Toe plate L x W	Shelf level heights	Height of upper- most tread	Castor Ø	Ref. no.
kg	mm	mm	mm	mm	mm	
250	1322 x 611 x 1880	1000 x 600	200, 680, 1155, 1630	928	125	22-21223



Roll containers with wire mesh sides









- Deck from beech wood laminate
- Supplied with 2 swivel castors with brake and 2 fixed castors, all castors with TPE tyre 200 x 40 mm, deep groove ball bearings

You will find this option on page 295



Without doors

■ Short sides and rear with 100x100x5 mm rod infill

Load capac- ity	Castor Ø	Shelf level heights	Overall height	Toe plate L x W	Ref. no.
kg	mm	mm	mm	mm	
600	200	269	1552	1000 x 700	22-37794
				1200 x 800	22-37795
			1800	1000 x 700	22-37796
				1200 x 800	22-37797
Shelf levels, for shelf trolleys / roll containers			3	1000 x 700	22-39547
				1200 x 800	22-39548



With hinged double doors

- Steel tube framework with welded grid infill, grid size 100 x 100 x 5 mm
- Double doors fitted to one long side
- Tubed frame comes with integral latch lock, padlock can be fitted (not supplied)
- Double doors can be hinged to short sides or to push handle

Load capacity	Castor Ø	Shelf level heights	Overall height	Dimensions L x W	Toe plate L x W	Ref. no.
kg	mm	mm	mm	mm	mm	
600	200	269	1552	1000 x 700	1000 x 700	22-37798
				1200 x 800	1200 x 800	22-37799
			1800	1000 x 700	1000 x 700	22-37599
				1200 x 800	1200 x 800	22-37598
Shelf level	s, for shelf t	rolleys / roll co	ontainers		1000 x 700	22-39547
					1200 x 800	22-39548
Document pockets, without top fold				275 x 180		46-21104
				325 x 235		46-21111



BITO

Cantilever trolleys





EN 1757-3

You will find this option on page 295



Cantilever trolleys, single sided use

- Supplied with 2 swivel castors with brake and 2 fixed castors, all castors with TPE tyre 200 x 40 mm, deep groove ball bearings
- Strong angle framework
- Horizontal and vertical tubes as well as arms are connected to each other by sturdy screw clamps
- Epoxy-coated in brillant blue, RAL 5007
- Useful height 1450 mm
- 12 clamp-fixed support arms from steel tube Ø 27 mm, useful depth 600 mm
- Load capacity per level 80 kg

Load capacity	Description	External dimensions L x W x H	Dimensions at base L x D	Ref. no.
kg		mm	mm	
500	single sided use	1400 x 800 x 1807	1200 x 800	22-39559
	standard version	1800 x 800 x 1807	1600 x 800	22-39560
		2200 x 800 x 1807	2000 x 800	22-39561
	with PVC sleeve	1400 x 800 x 1807	1200 x 800	22-39562
		1800 x 800 x 1807	1600 x 800	22-39563
		2200 x 800 x 1807	2000 x 800	22-39564



Cantilever trolleys, double sided use

- Supplied with 2 swivel castors with brake and 2 fixed castors, all castors with TPE tyre 200 x 40 mm, deep groove ball bearings
- Strong angle framework
- Horizontal and vertical tubes as well as arms are connected to each other by sturdy screw clamps
- Epoxy-coated in brillant blue, RAL 5007
- Useful height 1450 mm
- 24 clamp-fixed support arms from steel tube Ø 27 mm, useful depth 2 x 370 mm
- Load capacity per level 120 kg (60 kg each side)

Load capacity	Description	External dimensions L x W x H	Dimensions at base L x D	Ref. no.
kg		mm	mm	
500	standard	1400 x 800 x 1807	1200 x 800	22-39565
	version	1800 x 800 x 1807	1600 x 800	22-39566
		2200 x 800 x 1807	2000 x 800	22-39567
	with PVC sleeve	1400 x 800 x 1807	1200 x 800	22-39568
		1800 x 800 x 1807	1600 x 800	22-39569
		2200 x 800 x 1807	2000 x 800	22-39570



Shelves, for cantilever trolleys

15 mm waterproof plywood levels, both sides can be used as side up - one side sealed, one side coated with non-slip surface

Description	Useable depth	Length	Ref. no.
	mm	mm	
double sided use	370	1200	22-39572
		1600	22-39573
		2000	22-39574
single sided use	600	1200	22-39575
		1600	22-39576
		2000	22-39577



Load retention plates, for cantilever trolleys

■ Useful height 30 mm when mounted to standard arms, 27 mm when fitted to arms with PVC sleeve

Description	Ref. no.
load retention plate, to be fitted to the end of each arm	22-39571



Sheet material stands and trolleys



Sheet material stands, with 4 rubber feet

- With 4 rubber feet
- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- Deck from film coated plywood
- 7 fitting positions, clear width between divider bars 90 mm
- Fitted with a full width roller on one short side to help load and unload sheets
- Supplied without divider bars, please order separately, see below

Load capacity	Toe plate L x W	Ref. no.
kg	mm	
1200	1200 x 800	22-21313
1200	1600 x 800	22-21314



Sheet material trolleys

- Supplied with 2 swivel and 2 fixed castors, swivel castors with brake
- Load capacity 600 kg, wheels with TPE tyres, hub with deep groove ball bearing
- Load capacity 1200 kg, elastic rubber tyred wheels on roller bearing hub
- Deck from film coated plywood
- Welded stee tube construction, epoxy-coated in brilliant blue, RAL 5007
- 7 fitting positions, clear width between divider bars 90 mm
- Supplied without divider bars, please order separately, see below

Load capacity	Description	Toe plate L x W	Castor Ø	Ref. no.
kg		mm	mm	
600 TPE	TPE tyres	1200 x 800	200	22-21309
		1600 x 800	200	22-21311
1200	super elastic rubber	1200 x 800	200	22-21310
tyres	1600 x 800	200	22-21312	



Divider bars, for sheet material trolleys and stands

- Steel tube handle, epoxy-coated in brilliant blue, RAL 5007
- Divider bars allow subdivision of loading surface, seven fitting positions

Length	Height	Ref. no.
mm	mm	
1200	300	22-21315
	600	22-21316
	900	22-21317
1600	300	22-21318
	600	22-21319
	900	22-21320




Add-on feet for sheet material stands

- Optional accessory
- Set of 4 add-on feet to increase floor clearance to 100 mm for fork lift truck and hand pallet truck handling

Material	Pcs/ pack	Ref. no.
steel	4	22-21321







Transport dolly


for containers



Move your bins & containers without effort!



- Complete with 4 swivel castors
- Designed for European size stacking containers: 1 x 600 x 400 mm or 2 x 400 x 300 mm
- Framework from glassfibre reinforced polyamide





For containers sized 800 x 600 mm

- Supplied with 2 swivel and 2 fixed castors
- Suited for containers sized 800 x 600 mm
- Made from polypropylene

Load capacity	To suit contain- ers sized L x W	Toe plate L x W	Tyre material	Castor Ø	Ref. no.
kg	mm	mm		mm	
500	800 x 600	800 x 600	polyamide	125	43-1150



For multi-purpose containers sized 600 x 400 mm

- Complete with 4 swivel castors
- For multi-purpose containers sized 600 x 400 mm
- Fitted with drop-in lid for optimum positioning of MB containers
- Made from glassfibre reinforced polyamide, drop-in lid from polypropylene

	To suit containers sized L x W	Tyre material	Castor Ø	Ref. no.
kg	mm		mm	
250	600 x 400	PP	100	6-15510



For multi-purpose containers sized 800 x 400 mm and 800×600 mm

- Complete with 4 swivel castors
- For multi-purpose containers sized 800 x 400 mm and 800 x 600 mm
- Anodised aluminium frame with PVC corner edging

Load capacity	To suit containers sized L x W	Tyre material	Castor Ø	Ref. no.
kg	mm		mm	
250	800 x 400	PP	100	6-16494
	800 x 600	PP	100	6-19439

Pallet dollies





- Supplied with 2 swivel castors with brake and 2 fixed castors, wheels with TPE tyre and deep groove ball bearing
- Angled steel framework with support struts, epoxy coated in brilliant blue RAL 5007, without location lugs
- 20 mm upstand on all four sides for safe in-fitting of pallets and mesh box pallets
- Important note:
- Additional equipment such as add-on support stand, slot-in push handle, tow bar and coupling cannot be combined with this item!

Load capacity	External dimensions L x W x H	Toe plate L x W	Castor Ø	Ref. no.
kg	mm	mm	mm	
500	1240 x 830 x 238	1230 x 820	160	22-39558



You will find this option on page 295



Pallet dollies, with TPE tyres, load capacity 750 kg

- Supplied with 2 swivel and 2 fixed castors, swivel castors with brake
- Angled steel framework with 4 location lugs, powder coated in brilliant blue, RAL 5007

Load capacity	External dimensions L x W x H	Toe plate L x W	Wheel dimensions	Ref. no.
kg	mm	mm	mm	
750	855 x 655 x 329	810 x 610	200 x 40	22-43342
	1055 x 855 x 329	1010 x 810	200 x 40	22-43343
	1255 x 855 x 329	1210 x 810	200 x 40	22-21224
	1255 x 1055 x 329	1210 x 1010	200 x 40	22-43344



Pallet dollies, with polyamide tyres, load capacity 1000 kg

Load capacity	External dimensions L x W x H	Toe plate L x W	Wheel dimensions	Ref. no.
kg	mm	mm	mm	
1000	855 x 655 x 329	810 x 610	200 x 50	22-43345
	1055 x 855 x 329	1010 x 810	200 x 50	22-43346
	1255 x 855 x 329	1210 x 810	200 x 50	22-43347
	1255 x 1055 x 329	1210 x 1010	200 x 50	22-43348



Pallet dollies, with elastic solid rubber tyres, load capacity 1200 kg

Load capacity	External dimensions L x W x H	Toe plate L x W	Wheel dimensions	Ref. no.
kg	mm	mm	mm	
1200	855 x 655 x 329	810 x 610	200 x 50	22-43349
	1055 x 855 x 329	1010 x 810	200 x 50	22-43350
	1255 x 855 x 329	1210 x 810	200 x 50	22-21225
	1255 x 1055 x 329	1210 x 1010	200 x 50	22-43351



Tubular steel push handle, for pallet dollies

- Optional accessory
- Solid steel tube handle inserts into welded-on sleeves at swivel castor side, bolt-on fitting
- Only for first trolley
- Push handles ordered separately for later-on fitting must be welded

Material	Ref. no.
steel	22-21226





Pallet dollies



Self-locking push handle, for pallet dollies

- Push-fit handle for pallet dollies at least 800 mm wide
- Extremely robust steel tube construction with solid claw connectors
- Top of bow and cross strut with softgrip coating
- Once hooked off the pallet dolly, the handle can easily be pushed on 2 wheels to its storage place

Material	R	lef. no.
steel tube	2	2-43362



Add-on support stands, for pallet dollies

- Support allows to place pallets or wire-mesh box pallets in an ergonomically favourable height
- Supplied with bolts to fix legs of support stand to pallet dolly
- For use with pallets sized 1200 x 800 mm

Toe plate L x W	Max. loading height	Overall height (with support stand fitted)	Load capacity	Ref. no.
mm	mm	mm	kg	
1210 x 810	422	422	1200	22-37791
	552	600	1200	22-37792
	652	652	1200	22-37793

Tow bar and coupling pin, for pallet dollies



- Up to 5 dollies can be tied together
- Flat steel tow bar can be pushed under chassis when not in use
- Solid coupling pin on the fixed castor side
- Trucks/dollies can be linked to each other with a foot operated mechanism
- Max. towing weight 2000 kg

Max. towing capacity	Material	Ref. no.
kg		
2000	flat steel	22-43361



Tow bar and coupling pin, for pallet dollies



- Up to 5 dollies can be tied together
- Flat steel tow bar, gas pressure springs automatically lift tow bar into vertical position when not in use
- Solid coupling pin on the fixed castor side
- Trucks/dollies can be linked to each other with a foot operated mechanism
- Max. towing weight 2000 kg

Max. towing capacity	Material	Ref. no.
kg		
2000	flat steel	22-43363





Tipping skips



- Heavy duty welded steel construction made from 3 mm thick steel plate, liquid-tight seams
- Epoxy-coated in brillant blue, RAL 5007
- Version with drain tap and filter for separating liquids from solids





Roll forward tipping skips

- 2 swivel and 2 fixed castors, swivel castors are supplied with TOTALSTOP central locking system as standard feature, compliant with EN-1757-3
- Load capacity 750 kg, wheels with TPE tyres, hub with deep groove ball bearing
- Load capacity 800 kg, elastic rubber tyred wheels on roller bearing hub
- Body from 2 mm thick steel plate mounted on tilting mechanism
- Double bended top edges, unloading lip folded twice, oil tight welding seams
- Base from 3 mm bended steel sheet profiles with integrated fork entry pockets, kick plate, tipping lock and push handle
- Can be (re-)located on wheels or with a fork lift truck
- Tipping action is released manually
- Wheel diameter 200 mm

Description	Load capacity	External dimensions L x W x H	Filling height	Volume	Ref. no.
	kg	mm		litres	
without drain tap	750	1359 x 713 x 780	780	250	22-39578
	750	1374 x 730 x 1072	733	450	22-39579
	750	1458 x 855 x 1099	843	600	22-39580
	800	1458 x 1105 x 1099	843	800	22-39581
with drain tap	750	1359 x 713 x 780	780	250	22-39582
	750	1374 x 730 x 1072	733	450	22-39583
	750	1458 x 855 x 1099	843	600	22-39584
	800	1458 x 1105 x 1099	843	800	22-39585






Self-tipping skips

- Designed for handling loose bulk materials; skid-guided self-tipping action
- Do not need lifting for material unloading
- Empty body returns automatically into loading position
- Fitted as standard with fork entry pockets, slide-off and tipping lock, chain for secure fitting to

Description	Load capacity	External dimensions L x W x H	Filling height	Volume	Ref. no.
	kg	mm		litres	
without drain tap	1000	1294 x 731 x 837	748	350	22-39586
	1500	1294 x 1141 x 837	748	600	22-39587
	2000	1294 x 1661 x 837	748	900	22-39588
	2500	1751 x 1222 x 1127	1043	1200	22-39589
with drain tap	1000	1294 x 731 x 837	748	350	22-39590
	1500	1294 x 1141 x 837	748	600	22-39591
	2000	1294 x 1661 x 837	748	900	22-39592
	2500	1751 x 1222 x 1127	1043	1200	22-39593







Roller conveyors

- Modular design allows configurations to requirement
- Non-powered in-house transport of goods
- Easy to mount, allows immediate adaptation to different locations or needs
- Ball-bearing rollers provide very good travel characteristics

i BITO info

Roller conveyors are ideal for the non-powered in-house transport of plastic bins and containers as well as cardboard boxes. Whether used as push-along conveyor lane for order picking (no incline) or for non-assisted transport to the next workstation (with incline). Mounted onto support stands in front of racking rows in carton live storage environments, roller conveyor tracks allow to have the picking container always in direct reach and in optimum working height.

Free-standing roller tracks with or without incline help you move loads between locations, either by pushing them along or by gravity. Roller tracks are mounted onto twin support stands that can be adjusted to any height (no pitch) to ensure an optimum lane incline.

The incline of 2 - 5% depends on product characteristics and product weight. Due to their modular design, the roller tracks can mounted quickly and easily and can be adapted without any problem to changing conditions.



Roller conveyor segments, with plastic rollers

- Please add twin support stands (static or mobile version) to your order
- Other track lengths can be supplied upon request!
- The roller pitch is determined by the length of the smallest unit load. Please note that a unit load must be supported by at least 3 rollers.
- The weight of individual unit loads should not exceed 20-25 kg/unit.
- U-shaped side profiles, galvanised, dimensions 20/70/20 mm

		Total width / width	340/300 mm	440/400 mm	540/500 mm	640/600 mm	
Roller pitch T	Min. length of storage unit	Length	Ref. no.	Ref. no.	Ref. no.	Ref. no.	
mm	mm	mm					
75	225	975 mm	36-16575	36-16587	36-16599	36-16611	
		1500 mm	36-16578	36-16590	36-16602	36-16614	
		1950 mm	36-16581	36-16593	36-16605	36-16617	
		3000 mm	36-16584	36-16596	36-16608	36-16620	
100	300	1000 mm	36-16576	36-16588	36-16600	36-16612	
		1500 mm	36-16579	36-16591	36-16603	36-16615	
		2000 mm	36-16582	36-16594	36-16606	36-16618	
		3000 mm	36-16585	36-16597	36-16609	36-16621	
125	125	375	1000 mm	36-16577	36-16589	36-16601	36-16613
		1500 mm	36-16580	36-16592	36-16604	36-16616	
		2000 mm	36-16583	36-16595	36-16607	36-16619	
		3000 mm	36-16586	36-16598	36-16610	36-16622	

In-house transport





Bend segments, with plastic rollers

- Please add twin support stands (static or mobile version) to your order
- The roller track width is divided along the track middle line
- Inner curve radius 800 mm, full-width rollers or split rollers depending on track width
- U-shaped side profiles, galvanised, dimensions 20/70/20 mm

		Total width / width	340/300 mm	440/400 mm	540/500 mm	640/600 mm
Angle	Roller pitch T	Min. length of storage unit	Ref. no.	Ref. no.	Ref. no.	Ref. no.
	mm	mm				
45°	75	225 mm	36-16720	36-16724	36-16728	36-16732
	125	375 mm	36-16722	36-16726	36-16730	36-16734
90°	75	225 mm	36-16719	36-16723	36-16727	36-16731
	125	375 mm	36-16721	36-16725	36-16729	36-16733



Lift-up gates, with plastic rollers

		Total width / width	340/300 mm	440/400 mm	540/500 mm	640/600 mm
Length	Description	Roller pitch T	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm		mm				
1000 mm	hinges without spring	75	36-16671	36-16677	36-16683	36-16689
	assistance	100	36-16673	36-16679	36-16685	36-16691
		125	36-16675	36-16681	36-16687	36-16693
	spring-assisted hinges	75	36-16672	36-16678	36-16684	36-16690
		100	36-16674	36-16680	36-16686	36-16692
		125	36-16676	36-16682	36-16688	36-16694

Roller conveyors



- Please add twin support stands (static or mobile version) to your order
- The roller pitch is determined by the length of the smallest unit load. Please note that a unit load must be supported by at least 3 rollers.
- Other track lengths can be supplied upon request!
- U-shaped side profiles, galvanised, dimensions 20/70/20 mm



		Total width / width	340/300 mm	440/400 mm	540/500 mm	640/600 mm
Roller pitch T	Min. length of storage unit	Length	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm	mm	mm				
75	225	975 mm	36-16623	36-16632	36-16641	36-16650
		1500 mm	36-16626	36-16635	36-16644	36-16653
		1950 mm	36-16629	36-16638	36-16647	36-16656
		3000 mm	36-16659	36-16662	36-16665	36-16668
100	300	1000 mm	36-16624	36-16633	36-16642	36-16651
		1500 mm	36-16627	36-16636	36-16645	36-16654
		2000 mm	36-16630	36-16639	36-16648	36-16657
		3000 mm	36-16660	36-16663	36-16666	36-16669
125	375	1000 mm	36-16625	36-16634	36-16643	36-16652
		1500 mm	36-16628	36-16637	36-16646	36-16655
		2000 mm	36-16631	36-16640	36-16649	36-16658
		3000 mm	36-16661	36-16664	36-16667	36-16670

Bend segments, with steel rollers

- Please add twin support stands (static or mobile version) to your order
- The roller track width is divided along the track middle line
- Inner curve radius 800 mm, full-width rollers or split rollers depending on track width
- U-shaped side profiles, galvanised, dimensions 20/70/20 mm

		Total width / width	340/300 mm	440/400 mm	540/500 mm	640/600 mm
Angle	Roller pitch T	Min. length of storage unit	Ref. no.	Ref. no.	Ref. no.	Ref. no.
	mm	mm				
45°	75	225 mm	36-16736	36-16740	36-16744	36-16748
	125	375 mm	36-16738	36-16742	36-16746	36-16750
90°	75	225 mm	36-16735	36-16739	36-16743	36-16747
	125	375 mm	36-16737	36-16741	36-16745	36-16749







Lift-up gates, with steel rollers

		Total width / width	340/300 mm	440/400 mm	540/500 mm	640/600 mm
Length	Description	Roller pitch T	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm		mm				
1000 mm	hinges without spring	75	36-16695	36-16701	36-16707	36-16713
	assistance	100	36-16697	36-16703	36-16709	36-16715
		125	36-16699	36-16705	36-16711	36-16717
	spring-assisted hinges	75	36-16696	36-16702	36-16708	36-16714
		100	36-16698	36-16704	36-16710	36-16716
		125	36-16700	36-16706	36-16712	36-16718

Twin support stands

- Max. span between two support stands 2000 mm; load capacity 120 kg for 2000 mm spans and 175 kg for spans ≤1500 mm
- Height adjustable insert feet
- Construction height = top edge of roller conveyor
- Painted in sky blue, RAL 5015
- Square tubed construction with swivel hinges

Twin support stands, without castors

Width	300 mm	400 mm	500 mm	600 mm
Height adjustment range	Ref. no.	Ref. no.	Ref. no.	Ref. no.
mm				
275 - 340	36-16520	36-16525	36-16530	36-16535
330 - 395	36-16521	36-16526	36-16531	36-16536
390 - 570	36-16522	36-16527	36-16532	36-16537
550 - 850	36-16523	36-16528	36-16533	36-16538
680 - 1100	36-16524	36-16529	36-16534	36-16539

Twin support stands, mobile version

■ Swivel castors with brakes for easy manoeuvring, castor diameter 100 mm

Width	400 mm	500 mm	600 mm
Height adjustment range	Ref. no.	Ref. no.	Ref. no.
mm			
410 - 465	36-38382	36-38387	36-38392
465 - 525	36-38383	36-38388	36-38393
525 - 680	36-38384	36-38389	36-38394
685 - 920	36-38385	36-38390	36-38395
820 - 1100	36-38386	36-38391	36-38396





Accessories for roller conveyors with PVC/steel rollers



End stop plates, for roller conveyor lanes

Galvanised steel sheet

Width	300 mm	400 mm	500 mm	600 mm
Material	Ref. no.	Ref. no.	Ref. no.	Ref. no.
zinc-plated steel	36-16546	36-16547	36-16548	36-16549



Side capping for track profiles, for roller conveyor lanes

To be fitted and, where required, cut to size by customer; slots to fit in supports of side railing must be added by customer as necessary


Colour	Ref. no.
black	36-38375



Side railing, for straight lanes

- C-profiles, galvanised
- Rail height can be adjusted up to 100 mm
- Please state required length in mm at time of order.

Description	Ref. no.
for straight lanes, single sided use	36-16540
for straight lanes, either side	36-16541



Side railing, for bends

- C-profiles, galvanised
- Rail height can be adjusted up to 100 mm

Description	Ref. no.
for 45° bends, outer radius	36-16544
for 45° bends, either side	36-16545
for 90° bends, outer radius	36-16542
for 90° bends, either side	36-16543

Skatewheel expandaveyors

Skatewheel expandaveyors

i BITO info

This standalone, flexible and mobile conveyor system is ideal for all locations with little space and locations which are not suited for floor mounted conveyors.

Skatewheel expandaveyors

- Can be used in confined spaces
- Extendable to required length
- Legs are height adjustable between 700 and 1100 mm
- Simple to position at required location, locking brakes for safe loading and unloading
- Flexible routing possible for realising narrow bends and S-curves
- All expandaveyor components are galvanised
- Load capacity between two support stands 100 kg

	Width	300 mm	400 mm	500 mm	600 mm
Number of uprights	Extended length	Ref. no.	Ref. no.	Ref. no.	Ref. no.
	mm				
3	1200 - 4400	36-16551	36-16555	36-16559	36-16563
4	1700 - 6200	36-16552	36-16556	36-16560	36-16564
5	2200 - 7900	36-16553	36-16557	36-16561	36-16565
6	2800 - 9600	36-16554	36-16558	36-16562	36-16566

Track connector units, standard version

- Connect two expandaveyor segments
- Equipped with hooks on either side

	Width	300 mm	400 mm	500 mm	600 mm
Material	Length	Ref. no.	Ref. no.	Ref. no.	Ref. no.
	mm				
zinc-plated steel	400	36-16567	36-16568	36-16569	36-16570

End stop plates, standard version

- Fixed track end stop
- Prevent goods from falling at track end

	Width	300 mm	400 mm	500 mm	600 mm
Material	Length	Ref. no.	Ref. no.	Ref. no.	Ref. no.
	mm				
zinc-plated steel		36-16571	36-16572	36-16573	36-16574









Keep tools and equipment easily accessible!







BITO workstation systems are ideally suited for a very wide range of applications in storage, order picking and workshop environments. They assist in creating a professional and productive work environment.

The BITO TEC system is a real allrounder: whether used as functional PC workstation, office desk or packing station with cutter unit, paper dispenser and enough room for storing miscellaneous office equipment, the TEC system helps you stay organised. Of course, later-on reconfigurations are possible to adapt to changing working conditions.

Or are you looking for a heavy duty workbench system? Have a look at our range! We guarantee sturdy, functional and at the same time attractive systems as well as usealone products.



Contents

BITO TEC	332
Workbenches	336
Storage benches	338







BITO TEC

- The BITO TEC system allows you to create professional and functional workstations
- Modular system allows for the design of a workstation to individual requirements, later-on extensions are easy to realise
- Framework consisting of a robust steel frame to which desktops and shelf levels can be added to suit your needs
- Worktops are height adjustable on a 60 mm pitch
- Steel components epoxy-coated in aluminium grey, RAL 9007
- Worktops and shelf levels manufactured from chipboard laminate with beech finish



Workstation frames, single sided use

External dimensions L x W x H	Worktop/desktop L x W x thickness	Load capacity per desktop/worktop	Ref. no.
mm	mm	kg	
1306 x 920 x 1785	1600 x 800 x 28	150	44-19301
1306 x 920 x 1785	2000 x 800 x 38	250	44-19306



Workstation frames, double sided use

External dimensions L x W x H	Worktop/desktop L x W x thickness	Load capacity per desktop/worktop	Ref. no.
mm	mm	kg	
1306 x 1700 x 1785	1600 x 800 x 28	150	44-19302
1306 x 1700 x 1785	2000 x 800 x 38	250	44-19307



Office desks, single sided use

External dimensions L x W x H	Worktop/desktop L x W x thickness	Load capacity per desktop/worktop	Ref. no.
mm	mm	kg	
1306 x 620 x 692	1600 x 800 x 28	150	44-19295



Computer workstation, single sided use

- Framework for single-sided use
- Supplied with 28 mm computer desktop, load capacity 150 kg
- Supplied with straight steel sheet level, 400 mm deep, load capacity 90 kg
- Supplied with inclined shelf steel sheet level, 300 mm deep, load capacity 90 kg
- Delivery does not include mobile pedestal and on-the-side shelving!

External dimensions L x W x H	Worktop/desktop L x W x thickness	Load capacity per desktop/worktop	Ref. no.
mm	mm	kg	
1306 x 920 x 1785	1600 x 800 x 28	150	44-19444



Computer workstation, sitting and standing use, **Double sided use**

- Framework for double-sided use
- Supplied with 2 computer worktops, load capacity 150 kg, worktops 28 mm thick
- Supplied with straight steel sheet level, 400 mm deep, load capacity 90 kg
- Supplied with 2 inclined shelf steel sheet levels, 300 mm deep, load capacity 90 kg
- Delivery does not include mobile pedestal and on-the-side shelving!

External dimensions L x W x H	Worktop/desktop L x W x thickness	Load capacity per desktop/worktop	Ref. no.
mm	mm	kg	
1306 x 1700 x 1785	1600 x 800 x 28	150	44-19445



Workstations, single sided use

- Framework for single-sided use
- Supplied with 38 mm worktop, load capacity 250 kg
- Supplied with straight steel sheet level, 400 mm deep, load capacity 90 kg
- Supplied with shelf level with 4 solid sheet dividers, load capacity 100 kg
- Delivery does not include drawer, mandrel kit and cutter unit

External dimensions L x W x H	Worktop/desktop L x W x thickness	Load capacity per desktop/worktop	Ref. no.
mm	mm	kg	
1306 x 920 x 1785	2000 x 800 x 38	250	44-19443



Workstations, double sided use

- Framework for double-sided use
- Supplied with 2 worktops, load capacity 250 kg, worktops 38 mm thick
- Supplied with 2 shelf levels with 8 solid sheet dividers, load capacity 100 kg
- Delivery does not include drawer, mandrel kit and cutter unit

External dimensions L x W x H	Worktop/desktop L x W x thickness	Load capacity per desktop/worktop	Ref. no.
mm	mm	kg	
1306 x 1700 x 1785	2000 x 800 x 38	250	44-19446





BITO TEC

Accessories



Louvered panels suited for wall mounting



B Louvered panels suited for wall and workbench mounting



Spigots for louvred panels



Individual drawers



Shelf levels



Shelf levels



Computer desktops



Shelf levels



Worktops



Full sheet dividers



K Full sheet dividers



Connector beams



M Cutter units



Multi-purpose hanging rails



Add-on feet



Mandrel kits

Workstation systems



Pos.	Description		Dimensions	Ref. no.
			mm	
A	Louvered panels suited for wall mounting	easy-to-mount, hardwearing steel sheet panels, accept storage bins SK1095, SK1610 and SK2311	W 457 x H 495	8-14837
В	Louvered panels suited for wall and workbench mounting	reinforcing profiles on the rear, can also be fitted to a desktop, easy-to-mount, hard-wearing steel sheet panels, accept storage bins SK1095, SK1610 and SK2311	W 1486 x H 457	8-14835
C	Spigots for louvred panels	round spigots for louvered panels	L 150	8-14841
			L 200	8-14842
			L 300	8-14843
D	Individual drawers	painted in light grey, RAL 7035, ball bearing castors, full width handle from aluminium with label, cylinder lock complete with 2 keys	W 475 x H 128 x D 526	44-15802
3	Shelf levels steel sheet,	steel shelf level with integral retaining lip at rear, supplied with 2 cantilever arms, all	W 1246 x H 98 x D 400	44-19312
	straight version	parts epoxy-coated in grey aluminium, RAL 9007, load capacity 90 kg	W 1246 x H 98 x D 500	44-19313
3	Shelf levels steel sheet,	steel shelf level with integral retaining lip at rear, supplied with 2 cantilever arms, 25°	W 1246 x H 56,8 x D 300	44-19314
	inclined version	slope, all parts epoxy-coated in grey aluminium, RAL 9007, load capacity 90 kg	W 1246 x H 56,8 x D 400	44-19315
3	Computer desktops beech- wood laminate	28 mm chipboard worktop finished with beech laminate, complete with 2 cantilever arms 600 mm long and fixing material, load capacity 100 kg	L 1600 x W 800	44-19303
Ð	Shelf levels beechwood laminate	chipboard panel finished with beech laminate, perforated (Ø 7 mm) in 96 mm increments along both long sides for push-in divider adjustment, complete with 2 cantilever arms 400 mm long and fixing material, load capacity 150 kg	L 1600 x W 400	44-19308
D	Worktops	38 mm chipboard worktop finished with beech laminate, complete with 2 cantilever arms 600 mm long and fixing material, load capacity 100 kg	L 2000 x W 800	44-19309
D	Full sheet dividers slot-in fitting	epoxy-coated in grey aluminium, RAL 9007, subdivide shelf level into compartments and allow vertical storage	H 300 x D 300	44-19273
K	Full sheet dividers slide-on fitting	suited for straight shelves, epoxy-coated in grey aluminium, RAL 9007, can be positioned anywhere along the shelf length	H 170 x D 400	44-19289
)	Connector beams type BITO-TEC	epoxy-coated in grey aluminium, RAL 9007, connect 2 columns, 2 connector beams required per bay	L 1246	44-19216
M	Cutter units for paper rolls	clamp-fixed to worktop, cutting width 750 mm	W 750	44-19251
Ŋ	Multi-purpose hanging rails	aluminium rail for tool suspension complete with push-along PVC tool hangers, mounting supports, end caps and bolts to fix	L 1500	44-19252
0	Add-on feet	fitted to columns for easy reconfiguration of a single sided structure into a double sided structure, 2 kits required per frame	L 680 x W 50 x H 30	44-19317
9	Mandrel kits for paper rolls	consisting of a tubed holder, Ø 40 mm, fitted into slotted columns, with 2 adjustment rings and 2 end caps	L 1300 x W 40	44-19318



Workbenches



- Modular workbench system that can be extended to suit your needs
- Galvanised shelves, load capacity 100 kg
- 30 mm worktops manufactured from beechwood laminate, sealed with several coats of clear, water resistant varnish
- Flat edges
- Worktop surface smoothed and treated with linseed oil
- Framework epoxy-coated, only available in gentian blue, RAL 5010



Workbenches, type 1

	colour	galvanised	RAL 5010 Gentian blue
Description	External dimensions L x W x H	Ref. no.	Ref. no.
	mm		
without worktop	1100 x 624 x 850	10-12670	10-12672
with worktop	1100 x 700 x 880	10-12671	10-12673



Workbenches, type 2

	colour	galvanised	RAL 5010 Gentian blue
Description	External dimensions L x W x H	Ref. no.	Ref. no.
without worktop	2100 x 624 x 850	10-12674	10-12676
with worktop	2100 x 700 x 880	10-12675	10-12677



Workbenches, type 3

	colour	galvanised	RAL 5010 Gentian blue
Description	External dimensions L x W x H	Ref. no.	Ref. no.
with 2-piece worktop	3200 x 700 x 880	10-12679	10-12681
without worktop	3100 x 624 x 850	10-12678	10-12680



Workbenches, with worktop

- 3 frames
- 6 stiffening beams
- 4 steel shelves
- 25 mm thick multiplex worktop
- Framework galvanised

Description	External dimensions L x W x H	Colour	Ref. no.
	mm		
with worktop	2100 x 700 x 872	galvanised	10-12682

Workstation systems

Accessories









A Additional shelves

B Rear upstands

Hinged doors

Individual drawers







Drawer blocks

Side cladding for workbenches

G Back cladding for workbenches

Pos.	Description		Colour	Dimensions	Ref. no.	
				mm		
A	Shelves, 40 mm high	set includes 4 shelf clips, shelf height 40 mm, with shelf perfora- tions for dividers, supplied with 4 shelf clips	galvanised	L 1000 x W 600 x H 40	10-17066	
B	Rear upstands	beechwood laminate, worktop with rear upstand, clear height of rear upstand 70 mm, supplied with fixing material	natural colour	W 1094 x H 100	10-6781	\otimes
		, , , , ,	natural colour	W 2100 x H 100	10-6782	\approx
G	Hinged doors	width 1000 mm, can be retro-fitted, all components epoxy-coated in light grey, RAL 7035, supplied with 2 or 3 door pivots, double door with flush fitting turn handle, safety lock and 2 keys (3-point locking mechanism)	RAL 7035 Light grey	W 1000 x H 500	10-29954	
D	Individual drawers	painted in light grey, RAL 7035, ball bearing castors, full width handle from aluminium with label, cylinder lock complete with 2 keys	RAL 7035 Light grey	W 475 x H 128 x D 526	44-15802	
(3	Drawer blocks	with beams and safety pins, painted in light grey, RAL 7035, useful drawer heights 60/100/140 mm, full width handle with label, cylinder lock complete with 2 keys, supplied with cradle for suspension files, load capacity/drawer 80 kg	RAL 7035 Light grey	W 576 x H 425 x D 610	10-15803	⇔
ß	Side cladding for	solid steel sheet panel, supplement per frame, supplied pre-	galvanised	W 600 x H 850	10-15806	
	workbenches	assembled, supplied with fixing clips	RAL 5010 Gentian blue	W 600 x H 850	10-15807	
G	Back cladding for	solid steel sheet panel, easy to assemble without bolts, supplied	galvanised	W 1000 x H 850	14-13060	
•	workbenches	with fixings	RAL 5010 Gentian blue	W 1000 x H 850	14-13061	

Storage benches

Classic Line





- Robust construction from high grade thin steel sheet
- With environmentally friendly quality powder coating: framework and housing in anthracite grey RAL 7016, drawer fronts in light grey RAL 7035
- Theft-proof central locking mechanism with cylinder lock with 2 keys, also available with combination lock
- Fully extractable drawers on self-closing, ball bearing drawer runners, drawer load capacity 80 kg each, inside drawer dimensions 500 x 450 mm
- Supplied with ready-mounted full width aluminium handles
- 40 mm worktops manufactured from beechwood laminate, sealed with several coats of clear, water resistant varnish
- Levelling feet with glides to cope with uneven floors
- Other configurations and divider options upon request



Heavy duty workbenches, Classic Line, width 1500 mm

Supplied ready-mounted for immediate use

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 1 half-length shelf / right: 4 drawers, 1 x 75 mm, 1 x 100 mm, 1 x 150 mm, 1 x 175 mm	960	600	40	800	15-45580



Heavy duty workbenches, Classic Line, width 1500 mm

Supplied ready-mounted for immediate use

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 4 drawers, 1 x 75 mm, 1 x 100 mm, 1 x 150 mm, 1 x 175 mm / right: 4 drawers, 1 x 75 mm, 1 x 100 mm, 1 x 150 mm, 1 x 175 mm	960	600	40	800	15-45581



Heavy duty workbenches, Classic Line, width 2000 mm

Supplied ready-mounted for immediate use

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 1 half-length shelf / right: 4 drawers, 1 x 75 mm, 1 x 100 mm, 1 x 150 mm, 1 x 175 mm	960	600	40	800	15-45582

Heavy duty workbenches, Classic Line, width 2000 mm

Supplied ready-mounted for immediate use

Description	Height	Depth	Worktop thick- ness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 4 drawers, 1 x 75 mm, 1 x 100 mm, 1 x 150 mm, 1 x 175 mm / middle: 1 half- depth shelf / right: 4 drawers, 1 x 75 mm, 1 x 100 mm, 1 x 150 mm, 1 x 175 mm	960	600	40	800	15-45583



Workstation systems

Heavy duty workbenches, Classic Line, width 2000 mm

■ Supplied ready-mounted for immediate use

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 3 drawers, 2 x 150 mm, 1 x 200 mm / middle: 4 drawers, 2 x 100 mm, 2 x 150 mm / right: 1 hinged door 500 mm	960	600	40	800	15-45584



Heavy duty workbenches, Classic Line, width 2000 mm

■ Supplied ready-mounted for immediate use

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 4 drawers, 2 x 100 mm, 2 x 150 mm / middle: 3 drawers, 2 x 150 mm, 1 x 200 mm / right: 4 drawers, 2 x 100 mm, 2 x 150 mm	960	600	40	800	15-45585



Modular workbenches, Classic Line, width 2000 mm, 2 drawer blocks, width 600 mm each

■ Supplied unassembled to allow customisable configuration

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 7 drawers 100 mm / right: 5 drawers, 1 x 50 mm, 3 x 150 mm, 1 x 200 mm	860	600	40	1500	15-45587
left: 8 drawers 100 mm / right: 6 drawers, 1 x 50 mm, 1 x 100 mm, 3 x 150 mm, 1 x 200 mm	960	600	40	800	15-45586



Ref.no. 15-45586



Storage benches Classic Line



Modular workbenches, Classic Line, width 2000 mm, 1 drawer block, width 700 mm

- Supplied unassembled to allow customisable configuration
- Inside drawer dimensions 600 x 450 mm

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: square tubed framework / right: 7 drawers 100 mm	860	600	40	1000	15-45588



Mobile workbenches, Classic Line, width 1300 mm

Supplied ready-mounted for immediate use

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
4 swivel castors Ø 125 mm, 2 with brake / left: 2 laminate shelf levels 600 x 570 x 25 mm / right: 4 drawers, 2 x 100 mm, 2 x 150 mm	960	600	25	400	15-45589





Storage benches

Premium Line

- Robust construction from square tubed profiles 40 x 40 x 2 mm, housing from high grade steel sheet - load capacity up to 1000 kg
- Supplied ready-mounted for immediate use
- With environmentally friendly quality powder coating: framework and housing in light grey RAL 7035, drawer fronts in light blue RAL 5012
- Theft-proof central locking mechanism with cylinder lock with 2 keys, also available with combination lock
- Fully extractable drawers on ball bearing drawer runners, load capacity 50 kg for drawers with a front height of 50 mm, 100 kg for drawers with a front height from 75 mm, 180 kg for drawers with a front height from 100 mm
- Drawer inserts upon request
- 40 mm worktops manufactured from beechwood laminate, sealed with several coats of clear, water resistant varnish
- Levelling feet with glides to cope with uneven floors





Heavy duty workbenches, Premium Line, width 1500/2000 mm

Inside drawer dimensions 450 x 600 mm

Description	Width	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	mm	kg	
left: 1 half-length shelf / right:	1500	859	750	40	1000	15-45590
3 drawers, 3 x 200 m	2000	859	750	40	1000	15-45591



Heavy duty workbenches, Premium Line, width 1500 mm

■ Inside drawer dimensions 600 x 600 mm

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
links: 4 drawers, 2 x 100 mm, 2 x 200 mm / right: 1 door 600 mm, 1 shelf	859	750	40	1000	15-45592



Heavy duty workbenches, Premium Line, width 1500 mm

■ Inside drawer dimensions 600 x 600 mm

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 3 drawers, 3 x 200 mm / right: 4 drawers, 4 x 150 mm	859	750	40	1000	15-45593





Storage benches Premium Line



Heavy duty workbenches, Premium Line, width 1500 mm

Inside drawer dimensions 450 x 600 mm

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 3 drawers, 3 x 200 mm / right: 3 drawers, 3 x 200 mm	859	750	40	1000	15-45594



Heavy duty workbenches, Premium Line, width 2000 mm

■ Inside drawer dimensions 450 x 600 mm

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 4 drawers, 1 x 50 mm, 1 x 150 mm, 2 x 200 mm / right: 1 drawer, 1 x 150 mm, 1 x door 450 mm	859	750	40	1000	15-45595



Heavy duty workbenches, Premium Line, width 2000 mm

■ Inside drawer dimensions 450 x 600 mm

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 3 drawers, 3 x 200 mm / right: 3 drawers, 3 x 200 mm	859	750	40	1000	15-45596



Heavy duty workbenches, Premium Line, width 2000 mm

■ Inside drawer dimensions 600 x 600 mm

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 3 drawers, 3 x 200 mm / middle: 2 shelves 300 mm / right: 4 drawers, 4 x 150 mm	859	750	40	1000	15-45597



Heavy duty workbenches, Premium Line, width 2000 mm

■ Inside drawer dimensions 450 x 600 mm

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left: 5 drawers, 3 x 100 mm, 2 x 150 mm / middle: 3 drawers, 3 x 200 mm / right: 4 drawers, 2 x 75 mm, 1 x 150 mm, 1 x 300 mm	859	750	40	1000	15-45598



Heavy duty workbenches, Premium Line, width 2500 mm

■ Inside drawer dimensions 450 x 600 mm

Description	Height	Depth	Worktop thickness	Load capacity	Ref. no.
	mm	mm	mm	kg	
left end: 1 door 600 mm, 1 x shelf / middle left: 5 drawers, 1 x 50 mm, 1 x 100 mm, 3 x 150 mm / middle right: 3 drawers, 3 x 200 mm / right end: 2 drawers, 2 x 300 mm	859	750	40	1000	15-45599







Designed for neat and tidy storage!





The following pages will guide you through our range of high-quality steel sheet cabinets and cupboards for use in industrial and commercial environments.

The range stretches from cupboards providing many options for subdivision with shelves, partitions and compartments over multi-purpose cupboards fitted with sliding or clear view doors, storage benches in many variations to garment lockers and cloakroom units.

Some products are available with up to 25 colour combinations without supplement!





Contents

Utility cupboards3	46
Cabinets & Cupboards3	50
Janitorial, garment and file lockers3	54
Cabinets for environmentally hazardous goods 3	56
Utility cupboards3	57
Cube lockers3	60
Garment lockers3	62
Z-fronted wardrobes3	64
Cloakroom bench seats3	65
Drawer cabinets3	66







Utility cupboards

with hinged double door, 110° opening angle

- Strong steel construction with scratch resistant and UV resistant coating
- Reinforced doors provide extra strength
- Flush-fitting round grip operating a three point locking mechanism, complete with 2 keys
- Shelf load 50 kg, shelf levels are adjustable, galvanised finish
- Competitively priced all-purpose cupboard from high quality steel a musthave for storage areas, workshops or offices







With hinged double door, 110° opening angle

Colour housing	Colour doors	Width	Height	Depth	Number of shelves	Number of doors	Ref. no.
		mm	mm	mm			
RAL 7035 Light grey	RAL 5012 Light blue	940	1950	400	4	2	13-38400
	RAL 7035 Light grey	940	1950	400	4	2	13-20057
Shelf levels	galvanised	925	24	352	1		13-20437



Utility cupboards

with hinged double door, 110° opening angle

- Strong steel construction with scratch resistant and UV resistant coating
- Reinforced doors provide extra strength
- Excellent wear and tear resistance and user friendliness, easy-tooperate Ergo-Lock with handle, cylinder lock and 2 keys (3-point locking mechanism)
- Shelf load 70 kg, shelf levels are adjustable on a 15 mm pitch, galvanised finish
- Integral plastic glide feet protect floors and cabinets
- Housing and doors in light grey, RAL 7035







With hinged double door, 110° opening angle

Dimensions W x H	Depth	Number of shelves	Number of doors	Ref. no.
mm	mm			
500 x 1950	400	4	1	13-20722
	500	4	1	13-20724
700 x 1950	400	4	2	13-20726
	500	4	2	13-20728
930 x 1950	400	4	2	13-20474
	500	4	2	13-20476
	600	4	2	13-20478
	800	4	2	13-47770
1200 x 1950	400	4	2	13-20480
	500	4	2	13-20482
	600	4	2	13-20484
	800	4	2	13-47772

Accessories

Description		Suited for a cabinet depth of	Suited for a cabinet width of	Load cap. per shelf level	Ref. no.
				kg	
Shelf levels	durable steel	400	500	70	13-20723
construction, supplied with 4 shelf clips		700	70	13-20727	
		930	70	13-20475	
			1200	70	13-20481
		500	500	70	13-20725
			700	70	13-20729
			930	70	13-20477
			1200	70	13-20483
		600	930	70	13-20479
			1200	70	13-20485
	very deep for bulky	800	930	70	13-47771
	goods, durable steel construction, supplied with 4 shelf clips		1200	70	13-47773



SC SC

Utility cupboards

with hinged double door, 180° opening angle, suited for high load capacities

- Strong steel construction with scratch resistant and UV resistant coating
- Reinforced doors provide extra strength
- Excellent wear and tear resistance and user friendliness, easy-tooperate Ergo-Lock with handle, cylinder lock and 2 keys (3-point locking mechanism)
- Shelf load 110 kg, shelf levels are adjustable on a 15 mm pitch, load capacity of cupboard 700 kg
- Integral plastic glide feet protect floors and cabinets
- Housing and doors in light grey, RAL 7035







With hinged double door, 180° opening angle, suited for high load capacities

Dimensions W x H	Depth	Number of shelves	Number of doors	Ref. no.
mm	mm			
500 x 1950	400	4	1	13-47803
	500	4	1	13-47804
930 x 1950	400	4	2	13-47805
	500	4	2	13-47806
	600	4	2	13-47807
	800	4	2	13-47808
1200 x 1950	400	4	2	13-47809
	500	4	2	13-47810
	600	4	2	13-47811
	800	4	2	13-47812





Description		Suited for a cabinet depth of	Suited for a cabinet width of	Load cap. per shelf level	Ref. no.
				kg	
Shelf levels	durable steel	400	500	110	13-47813
construction, supplied with 4 shelf clips		930	110	13-47815	
		1200	110	13-47819	
	500	500	110	13-47814	
		930	110	13-47816	
		1200	110	13-47820	
	600	930	110	13-47817	
		1200	110	13-47821	
	800	930	110	13-47818	
			1200	110	13-47822



Utility cupboards

with hinged double door, 180° opening angle, and viewing windows

- Strong steel construction with scratch resistant and UV resistant coating
- Save time and money doors with 3 mm acrylic glass windows allow immediate product identification
- Reinforced doors provide extra strength, concealed locking bars
- Excellent wear and tear resistance and user friendliness, easy-tooperate Ergo-Lock with handle, cylinder lock and 2 keys (3-point locking mechanism)
- Shelf load 70 kg, shelf levels are adjustable on a 15 mm pitch, galvanised
- Integral plastic glide feet protect floors and cabinets
- Housing and doors in light grey, RAL 7035

i BITO info

Please specify at time of order:

Colour HOUSING: RAL ... Colour DOORS: RAL ...

RAL 5010 RAL 3000 RAL 5012 RAL 7016 RAL 7035

The indicated RAL colours for housing and doors can be combined to your choice.

Orders without colour specification will be supplied in light grey, RAL 7035.



With hinged double door, 180° opening angle, and viewing windows

Dimensions W x H	Depth	Number of shelves	Number of doors	Ref. no.
mm	mm			
500 x 1950	400	4	1	13-47833
	500	4	1	13-47834
700 x 1950	400	4	2	13-47835
	500	4	2	13-47836
930 x 1950	400	4	2	13-47837
	500	4	2	13-47838
	600	4	2	13-47839
	800	4	2	13-47840
1200 x 1950	400	4	2	13-47841
	500	4	2	13-47842
	600	4	2	13-47843
	800	4	2	13-47844

Accessories

Description		Suited for a cabinet depth of	Suited for a cabinet width of	Load cap. per shelf level	Ref. no.
				kg	
Shelf	durable steel construction,	400	500	70	13-20723
levels	supplied with 4 shelf clips		700	70	13-20727
			930	70	13-20475
			1200	70	13-20481
		500	500	70	13-20725
			700	70	13-20729
			930	70	13-20477
			1200	70	13-20483
		600	930	70	13-20479
		1200	70	13-20485	
	very deep for bulky goods,	800	930	70	13-47771
	durable steel construction, supplied with 4 shelf clips		1200	70	13-47773




with hinged double door, 110° opening angle, and bins



For highest demands in trade and industry!

- Strong steel construction with scratch resistant and UV resistant coating
- Reinforced doors provide extra strength
- Excellent wear and tear resistance and user friendliness, easy-tooperate Ergo-Lock with handle, cylinder lock and 2 keys (3-point locking mechanism)
- Shelf load 70 kg, shelf levels are adjustable on a 15 mm pitch, galvanised
- Integral plastic glide feet protect floors and cabinets
- Housing and doors in light grey, RAL 7035, other colour combinations can be supplied at no extra cost



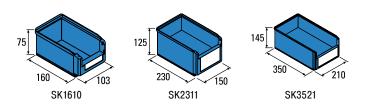

With hinged double door, 110° opening angle, and bins

Shelf load capacity 70 kg

External dimensions W x H x D	Number of shelves	Number of bins	Features	Ref. no.
mm				
700 x 1690 x 300	11	60	36 x SK1610 red (160 x 103 x 75 mm) 24 x SK2311 blue (230 x 150 x 125 mm)	13-20461



With hinged double door, 110° opening angle, and bins

■ Shelf load capacity 70 kg

External dimensions W x H x D	Number of shelves	Number of bins	Features	Ref. no.
mm				
700 x 1690 x 300	14	90	42 x SK1610 red (160 x 103 x 75 mm) 48 x SK1610 blue (160 x 103 x 75 mm)	13-20460



With hinged double door, 110° opening angle, and bins

■ Shelf load capacity 70 kg

External dimensions W x H x D	Number of shelves	Number of bins	Features	Ref. no.
mm				
1000 x 1980 x 420	11	72	48 x RK3109 blue (300 x 117 x 90 mm) 12 x SK3521 red (350 x 210 x 145 mm) 12 x SK3521 blue (350 x 210 x 145 mm)	13-20466



With hinged double door, 110° opening angle, and bins

■ Shelf load capacity 70 kg

External dimensions W x H x D	Number of shelves	Number of bins	Features	Ref. no.
mm				
1000 x 1980 x 420	9	40	20 x SK3521 red (350 x 210 x 145 mm) 20 x SK3521 blue (350 x 210 x 145 mm)	l .



With hinged double door, 110° opening angle, and bins

■ Shelf load capacity 70 kg

External dimensions W x H x D	Number of shelves	Number of bins	Features	Ref. no.
mm				
1000 x 1980 x 420	12	72	40 x RK3109 blue (300 x 117 x 90 mm) 16 x RK3209 blue (300 x 234 x 90 mm) 16 x RK3214 blue (300 x 234 x 140 mm)	13-20467






with hinged double door, 180° opening angle, drawers and bins



Plenty of room for small parts and components

- Strong steel construction with scratch resistant and UV resistant coating
- 2 doors on exterior door hinges, 180° opening, reinforced doors for extra strength
- Excellent wear and tear resistance and user friendliness, easy-tooperate Ergo-Lock with handle, cylinder lock and 2 keys (3-point locking mechanism)
- Shelf load 70 kg, load capacity of short shelves 50 kg, shelf levels are adjustable on a 15 mm pitch, drawer load capacity approx. 50 kg, galvanised finish
- Integral plastic glide feet protect floors and cabinets
- Reinforced doors with integrated louvre panel provide additional storage
- Supplied with storage bins providing excellent product visibility and convenient handling
- Housing and doors in light grey, RAL 7035, other colour combinations can be supplied at no extra cost



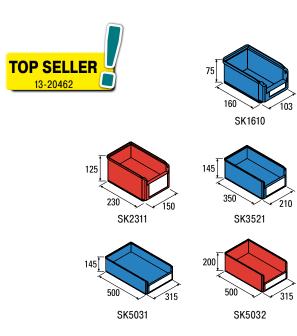

With hinged double door, 180° opening angle, and bins

External dimensions W x H x D	Number of shelves	Number of bins	Features	Ref. no.
1100 x 1950 x 535	9	92	40 x SK1610 blue (160 x 103 x 75 mm) 28 x SK2311 red (230 x 150 x 125 mm) 15 x SK3521 blue (250 x 210 x 145 mm) 9 x SK5032 red (500 x 315 x 200 mm)	13-20462



With hinged double door, 180° opening angle, and bins

External dimensions W x H x D	Number of shelves	Number of bins	Features	Ref. no.
1100 x 1950 x 535	9	106	56 x SK1610 red (160 x 103 x 75 mm) 35 x SK2311 blue (230 x 150 x 125 mm) 6 x SK5031 red (500 x 315 x 145 mm) 9 x SK5032 blue (500 x 315 x 200 mm)	



With hinged double door, 180° opening angle, drawers and bins

External dimensions W x H x D	Number of shelves	Number of bins	Features	Ref. no.
mm 1100 x 1950 x 535	7	83	3 x telescopic drawers 40 x SK1610 blue (160 x 103 x 75 mm) 28 x SK2311 red (230 x 150 x 125 mm) 15 x SK3521 blue (250 x 210 x 145 mm)	13-20468



With hinged double door, 180° opening angle, drawers and bins

External dimensions W x H x D	Number of shelves	Number of bins	Features	Ref. no.
1100 x 1950 x 535	7	97	3 x telescopic drawers 56 x SK1610 red (160 x 103 x 75 mm) 35 x SK2311 blue (230 x 150 x 125 mm) 6 x SK5031 red (500 x 315 x 145 mm)	13-20469



Janitorial, garment and file lockers

with hinged double door, 110° opening angle









Cylinder lock complete with 2 keys that lock both doors for secure storage



Please specify at time of order:

Colour HOUSING: RAL ... Colour DOORS: RAL ...

RAL 5010 RAL 3000 RAL 5012 RAL 7016 RAL 7035

The indicated RAL colours for housing and doors can be combined to your choice.

Orders without colour specification will be supplied in light grey, RAL 7035.

Janitorial lockers, with hinged double door, 110° opening angle

- Reduced height centre partition
- Left side: 3 fitted shelves (4 tiers)
- Right side: full height compartment with 1 garment rail and 3 push-along hooks
- Smooth and snag-free surfaces allow easy cleaning
- Doors louvres to provide air ventilation

Dimensions W x H x D	Number of doors	Ref. no.
mm		
600 x 1850 x 500	2	13-35733



Janitorial lockers, with hinged double door, 110° opening angle

- Full height partition
- Left side: 5 height adjustable shelves for optimum use of space
- Right side: 1 adjustable shelf, 1 garment rail and 3 push-along hooks
- Smooth and snag-free surfaces allow easy cleaning

Dimensions W x H x D	Number of doors	Ref. no.
mm		
1000 x 1950 x 500	2	13-35734
1000 x 1950 x 600	2	13-35735





- Full height centre partition
- Left side: 4 fitted shelves
- Right side: 1 fitted shelf, 1 garment rail and 3 push-along hooks
- Smooth and snag-free surfaces allow easy cleaning
- Doors louvres to provide air ventilation

Dimensions W x H x D	Number of doors	Ref. no.	
mm			
600 x 1850 x 500	2	13-35730	



Garment lockers/File lockers, with hinged double door, 110° opening angle

- Full width fitted hat shelf on top, centre partition underneath
- Left side: 3 height adjustable shelves for optimum use of space
- Right side: 1 garment rail and 3 push-along hooks
- Smooth and snag-free surfaces allow easy cleaning

Dimensions W x H x D	Number of doors	Ref. no.
mm		
1000 x 1950 x 500	2	13-35731
1000 x 1950 x 600	2	13-35732



Cabinets for environmentally hazardous goods

mit Flügeltüren 110°



- Professional storage of fertilizers, oils, fats, small amounts of diluents etc. (not suited for acids or alkalis) to avoid high costs of dealing with leak damage
- Spill trays with leak-tight welded seams in compliance with the relevant safety regulations
- Doors louvres to provide air ventilation
- Reinforced doors provide extra strength
- Excellent wear and tear resistance and user friendliness, easy-to-operate Ergo-Lock with handle, cylinder lock and 2 keys (3-point locking mechanism)
- Load capacity per tray shelf 80 kg, shelf levels are height adjustable on a 15 mm pitch
- Integral plastic glide feet protect floors and cabinets
- Housing and doors in light grey, RAL 7035, other colour combinations can be supplied at no extra cost





With hinged double door, 110° opening angle, and galvanised shelf levels

Dimensions W x H	Depth	Number of tray shelves	Number of doors	Ref. no.
mm	mm			
500 x 1950	500	4	1	13-47855
930 x 1950	500	4	2	13-47856



With hinged double door, 110° opening angle, and polythylene shelf levels

Dimensions W x H	Depth	Number of tray shelves	Number of doors	Ref. no.
mm	mm			
500 x 1950	500	4	1	13-47857
930 x 1950	500	4	2	13-47858

Utility cupboards

with sliding doors

- Strong steel construction with scratch resistant and UV resistant coating
- Ideal if space is limited, since sliding doors do not need extra space to open
- Smooth-running sliding doors on special rail-guided rollers
- Ergonomic metal handles, central locking mechanism with lock-down cylinder lock and 2 keys
- Shelf load 70 kg, shelf levels are adjustable on a 15 mm pitch, galvanised
- Integral plastic glide feet protect floors and cabinets
- Housing and doors in light grey, RAL 7035





With sliding doors

i BITO info

choice.

Please specify at time of order: Colour HOUSING: RAL ... Colour DOORS: RAL ...

Dimensions W x H	Depth	Number of shelves	Number of doors	Ref. no.
mm	mm			
1200 x 1950	400	4	2	13-47869
	500	4	2	13-47870
	600	4	2	13-47871
1600 x 1950	400	2 x 4	2	13-47872
	500	2 x 4	2	13-47873
	600	2 x 4	2	13-47874

Accessories

Description		Suited for a cabinet depth of	Suited for a cabinet width of	Load cap. per shelf level	Ref. no.
				kg	
Shelf durable steel levels construction,	construction,	1200	70	13-47875	
		1600	70	13-47878	
	supplied with 4 shelf clips	500	1200	70	13-47876
			1600	70	13-47879
		600	1200	70	13-47877
			1600	70	13-47880





Utility cupboards

with heavy duty sliding doors

- Strong steel construction with scratch resistant and UV resistant coating
- Ideal if space is limited, since sliding doors do not need extra space to
- Smooth-running sliding doors on special rail-guided rollers
- Ergonomic metal handles, central locking mechanism with lock-down cylinder lock and 2 keys
- Shelf load 110 kg, shelf levels are adjustable on a 15 mm pitch, load capacity of cupboard 700 kg
- Integral plastic glide feet protect floors and cabinets
- Housing and doors in light grey, RAL 7035





With heavy duty sliding doors

Dimensions W x H	Depth	Number of shelves	Number of doors	Ref. no.
mm	mm			
1200 x 1950	500	4	2	13-47905
1600 x 1950	500	2 x 4	2	13-47906



Accessories

Description		Suited for a cabinet depth of	Suited for a cabinet width of	Load cap. per shelf level	Ref. no.
				kg	
Shelf	durable steel construc-	500	1200	110	13-47907
levels	tion, supplied with 4 shelf clips		1600	110	13-47908



Utility cupboards

with sliding doors and windows

- Strong steel construction with scratch resistant and UV resistant coating
- Ideal if space is limited, since sliding doors do not need extra space to open
- Save time and money doors with 3 mm acrylic glass windows allow immediate product identification
- Smooth-running sliding doors on special rail-guided rollers
- Ergonomic metal handles, central locking mechanism with lock-down cylinder lock and 2 keys
- Shelf load 70 kg, shelf levels are adjustable on a 15 mm pitch, galvanised
- Integral plastic glide feet protect floors and cabinets
- Housing and doors in light grey, RAL 7035



Orders without colour specification will be supplied in light grey, RAL 7035.



Dimensions W x H	Depth	Number of shelves	Number of doors	Ref. no.
mm	mm			
1200 x 1950	400	4	2	13-47913
	500	4	2	13-47914
	600	4	2	13-47915
1600 x 1950	400	2 x 4	2	13-47916
	500	2 x 4	2	13-47917
	600	2 x 4	2	13-47918

Accessories

www.bito.com

Description		Suited for a cabinet depth of	Suited for a cabinet width of	Load cap. per shelf level	Ref. no.
				kg	
Shelf	durable steel	400	1200	70	13-47875
levels	construction, supplied with 4 shelf clips		1600	70	13-47878
		500	1200	70	13-47876
			1600	70	13-47879
		600	1200	70	13-47877
			1600	70	13-47880



359

Cube lockers

on high base









- Strong steel construction with high grade powder coating in light grey, RAL 7035. Other colour combinations can be supplied at no extra cost
- Doors are flush closing with cabinet surface, available as full sheet option or with viewing window (see accessories)
- Cylinder lock complete with 2 keys or cam lock for customer-fitted padlock
- Increased protection for valuable items optionally available with lock
- Smooth surfaces for easy cleaning
- Extra units with customised subdivision can be added at any time
- 500 mm deep







Cam lock for customerfitted padlock

BITO info Please specify at time of order: Colour HOUSING: RAL ... Colour DOORS: RAL ...

The indicated RAL colours for housing and doors can be combined to your

RAL 5010 RAL 3000 RAL 5012 RAL 7016 RAL 7035

Orders without colour specification will be supplied in light grey, RAL 7035.

Compartment width 300 mm

■ 500 mm deep

					Lock type	Cam lock for padlocks with a shackle diameter of 7 mm	Cylinder lock complete with 2 keys
Width	Height	Number of compartments	Number of com- partments per level	Number of compart- ments in height	Features	Ref. no.	Ref. no.
mm	mm						
330	1850	5	1	5		13-35622	13-35609
630	855	4	2	2		13-35663	13-35654
	1187	6	2	3		13-35666	13-35657
	1518	8	2	4		13-35669	13-35660
	1850	4	2	2	each compartment is supplied with 1 garment rail and 3 push-along hooks	13-35613	13-35600
		6	2	3		13-35616	13-35603
		8	2	4		13-35619	13-35606
		10	2	5		13-35623	13-35610
930	855	6	3	2		13-35664	13-35655
	1187	9	3	3		13-35667	13-35658
	1518	12	3	4		13-35670	13-35661
	1850	6	3	2	each compartment is supplied with 1 garment rail and 3 push-along hooks	13-35614	13-35601
		9	3	3		13-35617	13-35604
		12	3	4		13-35620	13-35607
		15	3	5		13-35624	13-35611
1230	855	8	4	2		13-35665	13-35656
	1187	12	4	3		13-35668	13-35659
	1518	16	4	4		13-35671	13-35662
	1850	8	4	2	each compartment is supplied with 1 garment rail and 3 push-along hooks	13-35615	13-35602
		12	4	3		13-35618	13-35605
		16	4	4		13-35621	13-35608
		20	4	5		13-35625	13-35612

Cabinets & Cupboards



Compartment width 400 mm

■ 500 mm deep

					Lock type	Cylinder lock complete with 2 keys	Cam lock for padlocks with a shackle diameter of 7 mm
Width	Height		Number of com- partments per level	Number of compart- ments in height	Features	Ref. no.	Ref. no.
mm	mm						
430	1850	5	1	5		13-35635	13-35648
830	855	4	2	2		13-35672	13-35681
	1187	6	2	3		13-35675	13-35684
	1518	8	2	4		13-35678	13-35687
	1850	4	2	2	each compartment is supplied with 1 garment rail and 3 push-along hooks	13-35626	13-35639
		6	2	3		13-35629	13-35642
		8	2	4		13-35632	13-35645
		10	2	5		13-35636	13-35649
1230	855	6	3	2		13-35673	13-35682
	1187	9	3	3		13-35676	13-35685
	1518	12	3	4		13-35679	13-35688
	1850	6	3	2	each compartment is supplied with 1 garment rail and 3 push-along hooks	13-35627	13-35640
		9	3	3		13-35630	13-35643
		12	3	4		13-35633	13-35646
		15	3	5		13-35637	13-35650
1630	855	8	4	2		13-35674	13-35683
	1187	12	4	3		13-35677	13-35686
	1518	16	4	4		13-35680	13-35689
	1850	8	4	2	each compartment is supplied with 1 garment rail and 3 push-along hooks	13-35628	13-35641
		12	4	3		13-35631	13-35644
		16	4	4		13-35634	13-35647
		20	4	5		13-35638	13-35651

Accessories

A Sloping top







B Additional charge for door with mail slot

Additional charge for door with viewing window

Pos.	Description	Dimensions mail slot L x H	Width	For a bay width of	Ref. no.	
		mm	mm	mm		
A	Sloping top	epoxy-coated in light grey RAL 7035, can be retro-fitted as	-	1230	-	13-35728
		required, rear height 200 mm, front height 40 mm	-	1630	-	13-35729
			-	630	-	13-35725
			-	830	-	13-35726
			-	930	-	13-35727
3	Additional charge for door	Doors with mail slot (extra charge)	240 x 10	-	300	13-35652
with mail slot		250 x 10	-	400	13-35653	
9	Additional charge for door	door Doors with viewing window instead of full sheet front (extra	-	-	300	13-35690
with viewing window	charge), no viewing window for 1850 mm high cabinets with 2, 3 or 4 tiers	-	-	400	13-35691	

Garment lockers









- Doors are flush fitting, reinforced and have air vents, delivery includes towel hook and framed label holder
- Each compartment is supplied with a fitted hat shelf, a garment rail and 3 push-along hooks
- Smooth, easy-to-clean surfaces
- Fully compliant with the regulations of accident prevention and insurance associations and national health and safety at work acts
- 25 colour combinations without supplement







Cylinder lock complete with 2 keys

Cam lock for customerfitted padlock







With feet, height 1850 mm

			Lock type	Cylinder lock complete with 2 keys	Cam lock for padlocks with a shackle diameter of 7 mm
Number of compartments	Compart- ment width	Total width	Depth	Ref. no.	Ref. no.
	mm	mm	mm		
2	300	630	500	13-20730	13-20735
	400	830	500	13-20733	13-20738
3	300	930	500	13-20731	13-20736
	400	1230	500	13-20734	13-20739
4	300	1230	500	13-20732	13-20737
	400	1630	500	13-20760	13-20761

Cabinets & Cupboards



On high base, height 1850 mm

			Lock type	Cylinder lock complete with 2 keys	Cam lock for padlocks with a shackle diameter of 7 mm
Number of compartments	Compartment width	Total width	Depth	Ref. no.	Ref. no.
	mm	mm	mm		
2	300	630	500	13-20740	13-20745
	400	830	500	13-20743	13-20748
3	300	930	500	13-20741	13-20746
	400	1230	500	13-20744	13-20749
4	300	1230	500	13-20742	13-20747
	400	1630	500	13-20762	13-20763



With seating unit, total height 2150 mm

- Height adjustable seating unit with 2 white plastic slats 120 x 30 mm, seating height 430 mm
- Beech wood slats upon request
- Locker depth 500 mm, overall depth 800 mm

			Lock type	Cylinder lock complete with 2 keys	Cam lock for padlocks with a shackle diameter of 7 mm
Number of compartments	Compartment width	Total width	Depth	Ref. no.	Ref. no.
	mm	mm	mm		
2	300	630	800	13-20750	13-20755
	400	830	800	13-20753	13-20758
3	300	930	800	13-20751	13-20756
	400	1230	800	13-20754	13-20759
4	300	1230	800	13-20752	13-20757



Accessories



A Sloping top

os.	Description	Width	Ref. no.	
			mm	
A Slo	Sloping top	epoxy-coated in light grey RAL 7035, can be retro-fitted as required, rear height 200 mm, front height 40 mm	630	13-35725
			830	13-35726
			930	13-35727
			1230	13-35728
			1630	13-35729

Z-fronted wardrobes







The space miracle

- Each compartment is supplied with a garment rail and 3 push-along hooks
- Doors are flush closing, reinforced and have air vents

i BITO info

Please specify at time of order:

Colour HOUSING: RAL ...

Colour DOORS: RAL ...

RAL 5010 RAL 3000 RAL 5012 RAL 7016 RAL 7035


The indicated RAL colours for housing and doors can be combined to your

Orders without colour specification will be supplied in light grey, RAL 7035.





Cam lock for customerfitted padlock



On high base

■ 500 mm deep

			Lock type	Cam lock for padlocks with a shackle diam- eter of 7 mm	Cylinder lock complete with 2 keys
Height	Total width	Compartment width	Number of compart- ments	Ref. no.	Ref. no.
mm	mm	mm			
1850	430	200 / 400	2	13-35716	13-35713
	830	200 / 400	4	13-35717	13-35714
	1230	200 / 400	6	13-35718	13-35715
		•			



With seating unit

- Beech wood slats upon request
- Seating height 430 mm
- All feet are levelling feet to compensate floor unevenness
- Locker depth 500 mm, overall depth 800 mm

			Lock type	Cam lock for padlocks with a shackle diam- eter of 7 mm	Cylinder lock complete with 2 keys
Height	Total width	Compartment width	Number of compart- ments	Ref. no.	Ref. no.
mm	mm	mm			
2100	430	200 / 400	2	13-35722	13-35719
	830	200 / 400	4	13-35723	13-35720
	1230	200 / 400	6	13-35724	13-35721




Cabinets & Cupboards

Cloakroom bench seats

- Square tubed framework 30/2 with levelling feet
- Single sided benches with 3 slats, double sided benches with 6 slats
- Slats available from white PVC (size 120 x 30 mm) or from beech wood (size 115 x 20 mm)
- Framework epoxy-coated in light grey, RAL 7035
- Cloakroom benches can be bolted to each other



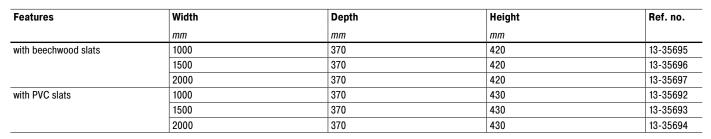



with beechwood slats



single sided with PVC slats



double sided with beechwood slats



double sided with PVC slats


With coat hook stand

- Benches with plastic slats: seating height 430 mm, benches with beech wood slats: seating height 420 mm
- Hidden coat hooks, 4 pcs per running metre

			Features	with PVC slats	with beechwood slats
Description	Width	Height	Depth	Ref. no.	Ref. no.
	mm	mm	mm		
single sided use	1000	1600	400	13-35698	13-35701
	1500	1600	400	13-35699	13-35702
	2000	1600	400	13-35700	13-35703
double sided use	1000	1600	770	13-35704	13-35707
	1500	1600	770	13-35705	13-35708
	2000	1600	770	13-35706	13-35709

Zubehör

Description		Length	Depth	Ref. no.
		mm	mm	
Shoe racks	Optional extra for cloakroom benches, double sided	1000	300	13-35710
	cloakroom benches require 2 shoe racks	1500	300	13-35711
		2000	300	13-35712













Drawer cabinets

Classic Line



- Sturdy structure made from top quality thin-rolled sheet metal, load capacity up to 1000 kg
- Top quality epoxy coating produced and applied with eco-friendly methods: housing in anthracite grey, RAL 7016, drawer fronts in light grey, RAL 7035
- Theft-proof central locking mechanism with cylinder lock and 2 keys, optionally with combination lock
- Full width aluminium handles already assembled to drawers
- Galvanised drawers with smooth sides. Insert kits can be added later to suit your needs; dividers can be fitted in 50 mm intervals. This option is available for drawers with a front height of 75 mm or more.
- Supplied with drawer selection mechanism (anti-tilt) to prevent that more than one drawer at a time is pulled out of housing
- Drawers are self-closing, fully extractable and run on ball-bearing slides. Load capacity 30 kg for drawers with a 50 mm drawer front, 80 kg for drawers with a front height of 75 mm or more.
- Other variations and drawer inserts upon request.



Classic Line, width 600 mm

			Depth	575 mm
Pos.	Height	Number of drawers	Drawer height	Ref. no.
	mm			
A	620	5	5 x 100 mm	13-45500
В	820	5	1 x 50 mm 3 x 150 mm 1 x 200 mm	13-45501
C	920	8	8 x 100 mm	13-45503
D	1020	7	1 x 50 mm 2 x 100 mm 3 x 150 mm 1 x 200 mm	13-45502





Classic Line, width 700 mm

			Depth	575 mm
Pos.	Height	Number of drawers	Drawer height	Ref. no.
	mm			
A	620	5	5 x 100 mm	13-45504
В	820	5	1 x 50 mm 3 x 150 mm 1 x 200 mm	13-45505
C	920	6	1 x 50 mm 1 x 100 mm 3 x 150 mm 1 x 200 mm	13-45506
D	1020	9	9 x 100 mm	13-45507



Classic Line, width 900 mm

			Depth	575 mm
Pos.	Height	Number of drawers	Drawer height	Ref. no.
	mm			
A	820	7	7 x 100 mm	13-45508
В	920	8	8 x 100 mm	13-45509
©	1020	7	1 x 50 mm 2 x 100 mm 3 x 150 mm 1 x 200 mm	13-45510
D	1220	8	1 x 50 mm 2 x 100 mm 3 x 150 mm 2 x 200 mm	13-45511



Drawer cabinets

Premium Line



- Sturdy structure made from top quality thin-rolled sheet metal, load capacity up to 1500 kg
- Top quality epoxy coating produced and applied with eco-friendly methods, housing in light grey RAL 7035, drawer fronts in light blue RAL 5012
- Theft-proof central locking mechanism with cylinder lock and 2 keys, optionally with combination lock
- Recessed full width aluminium handles sitting flush with cabinet front
- Epoxy-coated drawers, inner sides slotted on a 25 mm pitch for fast and easy divider fitting, many fitting options to suit your requirements
- Supplied with drawer selection mechanism (anti-tilt) to prevent that more than one drawer at a time is pulled out of housing
- Fully extractable drawers on roller bearings, drawers with a front height of 50 mm have a load capacity of 50 kg, 100 kg for drawers with a front height of 75 mm or more and 180 kg for drawers with a front height of 100 mm or more.
- Other variations and drawer inserts upon request.



Premium Line, width 705 mm

			Depth	736 mm
Pos.	Height	Number of drawers	Drawer height	Ref. no.
	mm			
A	1019	6	1 x 75 mm 1 x 125 mm 2 x 150 mm 2 x 200 mm	13-45512
В	1019	7	1 x 75 mm 2 x 100 mm 1 x 125 mm 2 x 150 mm 1 x 200 mm	13-45513
G	1019	8	2 x 75 mm 4 x 100 mm 1 x 150 mm 1 x 200 mm	13-45514
D	1019	9	9 x 100 mm	13-45515



Configuration options for drawer cabinets

Housing for drawer cabinets, Premium Line, width 705 mm

Overall height = useful height + 119 mm

		Depth	736 mm
Useable height	Height	Width	Ref. no.
mm	mm	mm	
400	519	705	13-45516
600	719	705	13-45517
700	819	705	13-45518
900	1019	705	13-45519
1200	1319	705	13-45520
1400	1519	705	13-45521

i BITO info

Customise your drawer cabinet by selecting cabinet height, drawer height, drawer slides and load capacity. Drawers with different slide types and load capacities can be combined in one cabinet.







Example: 5 drawers Useful height 600 mm









■ 600 x 600 mm, fully extractable

Individual drawers, Premium Line, width 600 mm

Load capacity	Front height	Filling height	Useable height	Ref. no.
kg	mm	mm	mm	
50	50	28 mm	30	13-45522
100	75	56 mm	58	13-45523
	100	81 mm	83	13-45524
	125	81 mm	108	13-45525
	150	131 mm	133	13-45526
	175	131 mm	158	13-45527
	200	181 mm	183	13-45528
	250	181 mm	233	13-45529
	300	181 mm	283	13-45530
180	100	81 mm	83	13-45531
	125	81 mm	108	13-45532
	150	131 mm	133	13-45533
	175	131 mm	158	13-45534
	200	181 mm	183	13-45535
	250	181 mm	233	13-45536
	300	181 mm	283	13-45537
300	100	81 mm	83	13-45538
	125	81 mm	108	13-45539
	150	131 mm	133	13-45540
	175	131 mm	158	13-45541
	200	181 mm	183	13-45542
	250	181 mm	233	13-45543
	300	181 mm	283	13-45544

Order example

Number of drawers

(front height)

Housing: 1x 13-45517

Drawers: 1x13-45523, 1x13-45524, 1x13-45525,

2x13-45526

www.bito.com



369




Drawer cabinets

Premium Line



- Sturdy structure made from top quality thin-rolled sheet metal, load capacity up to 1500 kg
- Top quality epoxy coating produced and applied with eco-friendly methods, housing in light grey RAL 7035, drawer fronts in light blue RAL 5012
- Theft-proof central locking mechanism with cylinder lock and 2 keys, optionally with combination lock
- Recessed full width aluminium handles sitting flush with cabinet front
- Epoxy-coated drawers, inner sides slotted on a 25 mm pitch for fast and easy divider fitting, many fitting options to suit your requirements
- Supplied with drawer selection mechanism (anti-tilt) to prevent that more than one drawer at a time is pulled out of housing
- Fully extractable drawers on roller bearings, drawers with a front height of 50 mm have a load capacity of 50 kg, 100 kg for drawers with a front height of 75 mm or more and 180 kg for drawers with a front height of 100 mm or
- Other variations and drawer inserts upon request.

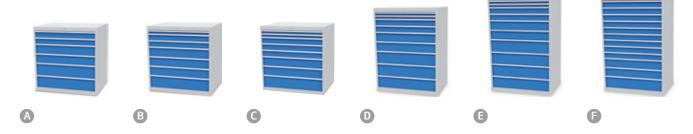

Premium Line, width 1005 mm

			Depth	736 mm
Pos.	Height	Number of drawers	Drawer height	Ref. no.
	mm			
A	1019	6	2 x 100 mm 2 x 150 mm 2 x 200 mm	13-45545
В	1019	7	1 x 50 mm 2 x 100 mm 3 x 150 mm 1 x 200 mm	13-45546
0	1019	8	2 x 50 mm 3 x 100 mm 2 x 150 mm 1 x 200 mm	13-45547
0	1319	9	2 x 50 mm 2 x 100 mm 2 x 150 mm 3 x 200 mm	13-45548
3	1519	10	2 x 50 mm 2 x 100 mm 2 x 150 mm 4 x 200 mm	13-45549
G	1519	12	9 x 100 mm 2 x 150 mm 1 x 200 mm	13-45550



Configuration options for drawer cabinets



Housing for drawer cabinets, Premium Line, width 1005 mm

Overall height = useful height + 119 mm

		Depth	736 mm
Useable height	Height	Width	Ref. no.
mm	mm	mm	
400	519	1005	13-45551
600	719	1005	13-45552
700	819	1005	13-45553
900	1019	1005	13-45554
1200	1319	1005	13-45555
1400	1519	1005	13-45556

i BITO info

Customise your drawer cabinet by selecting cabinet height, drawer height, drawer slides and load capacity. Drawers with different slide types and load capacities can be combined in one cabinet.

Example: Useful height 600 mm Ref.no. 13-45552









Front









Example:

Housing: 1x 13-45552

Drawers: 3x13-45559, 2x13-45561

Individual drawers, Premium Line, width 900 mm ■ 900 x 600 mm, fully extractable

Load capacity	Front height	Filling height	Useable height	Ref. no.
kg	mm	mm	mm	
50	50	28 mm	30	13-45557
100	75	56 mm	58	13-45558
	100	81 mm	83	13-45559
	125	81 mm	108	13-45560
	150	131 mm	133	13-45561
	175	131 mm	158	13-45562
	200	181 mm	183	13-45563
	250	181 mm	233	13-45564
	300	181 mm	283	13-45565
180	100	81 mm	83	13-45566
	125	81 mm	108	13-45567
	150	131 mm	133	13-45568
	175	131 mm	158	13-45569
	200	181 mm	183	13-45570
	250	181 mm	233	13-45571
	300	181 mm	283	13-45572
300	100	81 mm	83	13-45573
	125	81 mm	108	13-45574
	150	131 mm	133	13-45575
	175	131 mm	158	13-45576
	200	181 mm	183	13-45577
	250	181 mm	233	13-45578
	300	181 mm	283	13-45579



Storage and order picking solutions



Sustainable and efficient storage and picking systems





The logistics sector is the growth market of the future. Fast material flow, time conscious coordination of each step and lean procedures are key indicators to measure the success of any logistics chain. All these requirements can only be met with cost efficient and reliable storage and handling systems.



When it comes to realising such systems, companies that manufacture all components in their own plant, provide project planning and accompany project realisation have a clear advantage. Companies like BITO.

In-house production of shelving and racking as well as of bins and containers guarantees safe project management through higher transparency and efficiency. Time schedules can be precisely observed, coordination between the departments involved is easier as information paths are shorter.

Storage and order picking solutions

Contents

Multi-tier installations/Mezzanines	3/4
Carton live storage systems	376
Automated small parts storage	378
Pallet racking PRO	380
Drive-in racking	382
Pallet live storage PROflow	384
Cantilever racking	386
PROmobile pallet racking	388
Shuttle storage system PROmotion	390





Multi-tier installations/Mezzanines



BITO Multi-tier installations / Mezzanines

Within any warehouse, space utilisation, i.e. floor space taken and height utilised, is key to shelving and racking efficiency.

Shelving – whether used as independent solution or as part of a facility in which different storage techniques are applied – is the perfect system for multi-tier applications.

It solves the problem of limited floor space by adding further tiers to make full use the ceiling height in a building.



Multi-tier installations/Mezzanines



Your benefits

- Good space utilisation as floor surface multiplies by making best use of warehouse height
- Compact storage of light-weight and medium-weight storage units
- Simultaneous order picking on several tiers reduces order processing times
- Limited investment as the system components of the floor level construction also carry the upper level(s) with shelving and service aisles and/or a mezzanine floor


Multi-tier shelving



Mezzanine system BBS



Additional working space on the level(s) on top

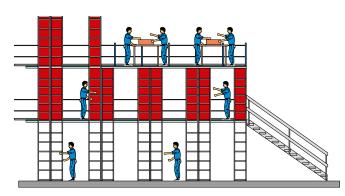

Additional storage space/working areas on the floor level





Further information on this product is provided in our catalogue **PROJECT GUIDE** which is available free of charge. To obtain your copy please send us an email to info@bito.com





BITO Carton live storage

- drastic time savings give a boost to pick quantities

Among order picking installations that work according to the operator-to-goods principle, carton live storage is on the increase. Higher investment costs are more than compensated by improvements in efficiency.

Separate aisles for picking and loading avoid operators disturbing each other. Order pickers can rely on the constant availability of goods at the picking face as all storage units move unassisted into the picking position. Straight working aisles allow immediate identification of product lines which need to be re-stocked, thereby improving picking productivity.

Substantially reduced travel times – between 40% to 70% compared to conventional shelving and racking – and reductions in floor space utilisation of up to 30% make BITO carton live storage a very economic solution for almost any storage environment.




Carton live storage systems



Your benefits

- High frame load capacities allow to install buffer levels on top for maximum use of headroom
- Automated working processes provide a further increase in efficiency
- Transparent operations and faster response times
- Higher productivity by implementing a fully automated and computer monitored system
- FIFO principle (first in, first out) is strictly observed
- Link-up to warehouse management systems allows permanent inventory control
- Inclined live storage levels make sure that all loads move unassisted to the picking face, even loads with poor travel characteristics

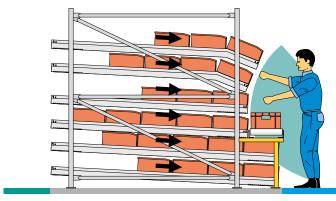

Ergonomically designed picking face

Kanban shelving



Automated carton live storage




Carton live storage with buffer stock on top





(→

Further information on this product is provided in our catalogue **PROJECT GUIDE** which is available free of charge. To obtain your copy please send us an email to info@bito.com

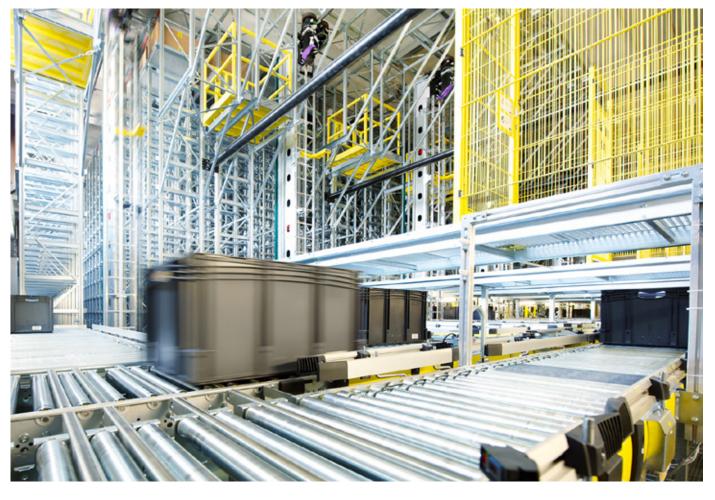

Automated small parts storage and retrieval – the ultimate boost for operational efficiency

Order picking installations based on the goods-to-operator principle are increasingly integrated into total logistic systems. Most common on the market are ASRS systems – automated small parts storage and retrieval systems (BITO type "AKL") with individual locations for bins and trays.

In this market, BITO is one of the few suppliers to provide the racking technology complete with bins, containers and trays.




Automated small parts storage



Your benefits

- Extremely short access times
- Optimum utilisation of available warehouse height with high bay shelving and racking
- Modern warehouse management systems provide a very good availability of all product lines and permanent inventory control
- Even heavy-weight storage units can be handled conveniently
- Closed system prevents unauthorised access to goods

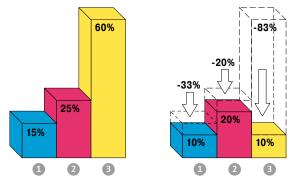

The optimum ergonomic layout of the picking area in front of an automated bin or tray storage installation reduces reading and picking times. There is almost no walking required for order pickers which reduces travel times considerably.

(1) Reading (2) Picking (3) Travelling

Plastic bins and containers



Plastic trays



Steel trays with collar



Steel trays



Customised solutions



9

Further information on this product is provided in our catalogue **PROJECT GUIDE** which is available free of charge. To obtain your copy please send us an email to info@bito.com



BITO Pallet racking

 the ageless "classic" in product storage and handling

Racking installations with wide aisles are the most common solution. As a rule, loading and unloading is done with front stackers, stacker cranes or order picking trucks.

Pallet racking can also be realised as a narrow aisle configuration. In most cases, loading and picking is done with rail guided or inertially guided vehicles.




BITO

Your benefits

- Accommodates Euro pallets, wire-mesh box pallets and special size pallets
- Various bay widths and constructive details allow long and short side pallet handling
- Double deep storage
- Compatible with other shelving and racking systems
- Allows automated servicing
- Can be realised as multi-tier construction
- Broad range of system specific accessories


Broad aisle configuration



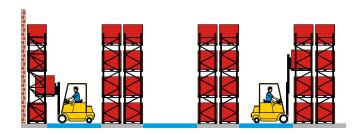


Narrow aisle configuration



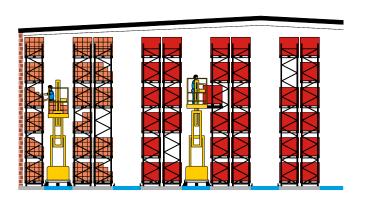

Automated pallet racking



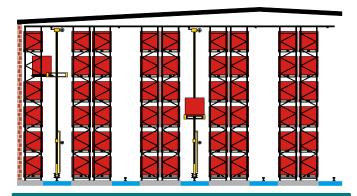

€

Further information on this product is provided in our catalogue **PROJECT GUIDE** which is available free of charge. To obtain your copy please send us an email to info@bito.com



BITO Drive-in racking

 requires fewer service aisles, allowing you to save on expensive storage space

> Drive-in racking allows storage of several pallets in depth per storage level, thus providing optimum utilisation of floor surface and warehouse volume.


> This storage solution is ideal for low pallet turnover such as seasonal storage.



BITO

Your benefits

- Cost efficient high-density storage
- Optimum utilisation of warehouse surface and height
- Good utilisation of available storage volume
- Safe storage of pressure sensitive goods and pallets with unstable loads
- Hook-in brackets allow fast and easy adjustment of storage levels




Classic pallet racking

1 2 3 4 5 6

Drive-in racking

Drive-in racking configuration



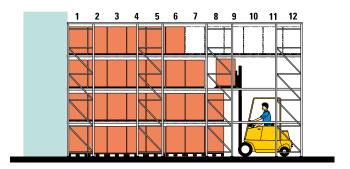



Further information on this product is provided in our catalogue **PROJECT GUIDE** which is available free of charge. To obtain your copy please send us an email to info@bito.com





BITO Pallet live storage PROflow - gets your stock moving

Pallet live storage systems play an increasingly important role in storage and handling, as users recognise their potential for improving efficiency.

In the past, pallet live storage was mainly used for buffer stocks in production areas, warehouses and despatch departments. Today, the focus is on using the pallet live storage system for order picking according to the FIFOprinciple or as space saving push-back solution working on the LIFO basis.

Lane configuration making best use of space in racking width and height provides high-density storage and allows optimum use of the available headroom.

The increase in efficiency over conventional racking can be as high as 60%.

Moreover, constant availability of stock avoids idle times.




Pallet live storage PROflow



Your benefits

- Compared to bulk storage, live storage provides direct access to all reference lines on stock
- High degree of flexibility, fast order picking
- Adherence to the FIFO principle (first in, first out)
- Easy control of sell-by dates, call-off quantities and production batches
- No idle times
- Clear layout allows immediate product access thereby reducing process times and improving process predictability
- Separate loading and picking aisles
- Undisturbed working, as lift truck operators cannot get in each other's way. This improves work performance and operational safety in your warehouse.
- Reduced number of racking aisles, shorter in-house travel routes
- Gain in storage space of up to 60% compared to conventional pallet racking. Compact storage on a smaller surface is less energy consuming; a 40% reduction in travel time reduces electricity/fuel consumption of service vehicles.

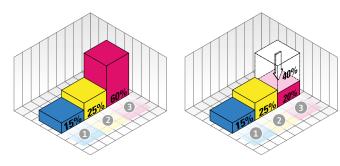

Compared to conventional pallet racking, pallet live storage reduces travel times by two thirds.

(1) Reading (2) Picking (3) Travelling



Further information on this product is provided in our catalogue **PROJECT GUIDE** which is available free of charge. To obtain your copy please send us an email to info@bito.com



Scan this QR code:
Product video
PROflow
www.bito.com/
qr-proflow-int


FlowStop load separator



The BITO FlowStop load separator has been designed to reliably separate the first pallet at the picking face from the other pallets in the lane. This allows to retrieve the pallet at the picking face safely without lane pressure and without damaging the FlowStop load separator.

The load separator has been fitted out of reach for truck forks. This means substantially lower repair costs as well as safe and convenient pallet loading and unloading.

Pallet live storage

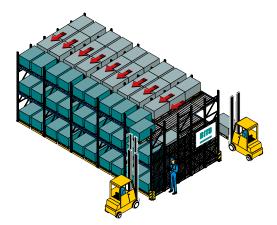

Operates according to the FIFO principle: first in, first out

Push-back pallet racking



Operates according to the LIFO principle: last in, first out







BITO Cantilever racking

ideal for long and bulky loads

Cantilever racking is a very versatile storage system which accommodates a wide range of loads: long loads such as bars and pipes, flat materials like wooden and metal sheets and plates as well as bulky items.

The system's complete modularity is a big asset for a "perfect fit". All components can be manufactured to suit your individual requirements as to load capacity and layout.


Based on your specific data such as warehouse or storage area dimensions, flooring characteristics and product requirements we will work out a customised solution. Our experienced team will be pleased to provide professional support.



BITO

Your benefits


- For rigid long loads: cantilever arms with and without end stop
- For flexible long loads, bars of any length and bulky goods: straight cantilever arms with shelves
- For ergonomically favourable picking at assembly places: inclined cantilever arms with shelves
- For coils and vertically stored goods: tubular arms

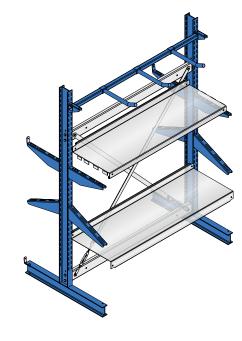

9

Further information on this product is provided in our catalogue **PROJECT GUIDE** which is available free of charge. To obtain your copy please send us an email to info@bito.com

Cantilever racking for indoor use

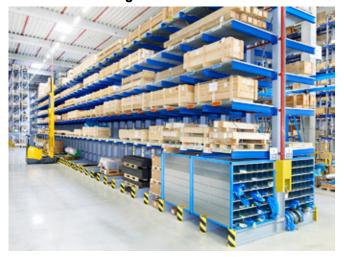

Cantilever racking for outdoor use



Mobile cantilever racking



For heavy duty applications





Maximum storage density with PRO mobile pallet racking

Floor space optimisation and storage density are key to any consideration of cutting down warehouse costs. When the aim is to make optimum use of existing floor space or to reduce floor space occupation in order to create space for another purpose, mobile pallet racking will be the most efficient solution.

Depending on the system installed, storage capacity increases by up to 80% and floor space occupation reduces by up to 50%. These savings translate into a real money value, as investment costs are reduced considerably for new warehouse constructions.

Modern warehouse management systems combined with thorough planning and knowledgeable support from concept to completion are a sound basis for realising efficient storage solutions.



PROmobile pallet racking




+75%

Your benefits

- Save on space in new constructions
- Compact storage saves on floor surface and storage volume
- Floor space is released by eliminating the need for several aisles
- Savings on energy costs, particularly in cooler and freezer storage environments
- Substantially reduced investment cost

- Gain storage capacity in existing premises
- Substantial increase in storage capacity on the same surface area
- No costs for setting up a new building
- Optimum use of floor space in existing premises

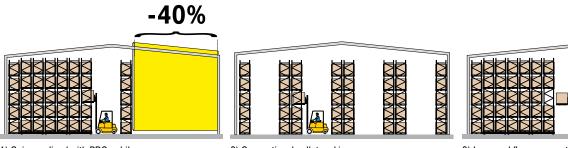

1) Gains realised with PROmobile

2) Conventional pallet racking

3) Improved floor space utilisation

PROmobile pallet racking





✐

Further information on this product is provided in our catalogue **PROJECT GUIDE** which is available free of charge. To obtain your copy please send us an email to info@bito.com



Shuttle storage system PROmotion



BITO PROmotion shuttle storage – move it smart

The shuttle system is a modern and efficient alternative to ASRS systems, drive-in and push-back racking and live storage systems. The system is serviced by a battery powered, remote-controlled shuttle that moves on rails and carries pallets into and out of the lanes. Shuttle infeeding and outfeeding is done by a conventional fork lift truck.

The BITO shuttle system comes with an unrivalled safety package.





Shuttle storage system PROmotion



Your benefits

- High density storage
- Excellent use of cubic space, as there is no lane inclination
- Deep lanes provide a high degree of floor space utilisation
- FIFO and LIFO principle applicable
- Damage-free storage of pressure-sensitive goods
- Each lane can be individually accessed
- Cost efficient storage of a limited number of bulk stored product lines

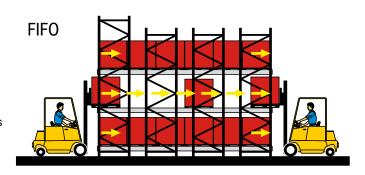

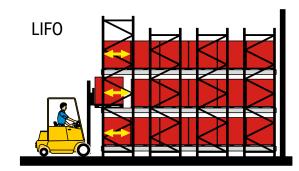

BITO PROmotion shuttle storage system



- Remote control
- Rail detection sensor
- Emergency stop button
- Laser scanner to detect persons
- Distance sensor
- 6 Carrier rail



Further information on this product is provided in our catalogue **PROJECT** $\mbox{\bf GUIDE}$ which is available free of charge. To obtain your copy please send us an email to info@bito.com



Α	Boltless shelving for industry requirements 132, 140
	Boltless shelving with wire baskets
Access steps315	Bottle holder
Accessories156–157, 178	Bracket for back cladding > Wide span shelving178
Accessories for boltless shelving 154	Brackets for back stops and back cladding
Accessories for roller conveyors	> Pallet racking
with PVC/steel rollers	Brake clips > Unit load order picking 205
Additional charge for door with mail slot > Cube lockers361	Brake rollers > Unit load order picking 205, 210
Additional charge for door with viewing window	Brake shoes > Unit load order picking 205
> Cube lockers361	Bucket/can holders > Drum racking
Additional fencing planks191, 268	
Additional hose levels	C
> Hose shelving, Hose carts	0.11 0
Additional levels > Supply shelving	Cabinets & Cupboards
Additional shelf levels for wide span shelving > Shelving with extra large shelves 136–137	Cabinets for environmentally hazardous goods 356
Additional shelves > Boltless shelving34, 132–135,	Cabinets for fire fighting equipment149 Cantilever arms
153, 160, 251, 337	> Cantilever arms > Cantilever racking components type L and S219
Additional shelves > Shelving171	Cantilever arms > Cantilever racking type ES 227
Add-on feet > BITO TEC	Cantilever racking 212, 222
Add-on feet for sheet material stands	Cantilever racking columns >
> Sheet material stands	Cantilever racking components type L and S218
Add-on fork entry shoes > European size stacking containers XL	Cantilever racking columns > Cantilever racking type ES
Add-on fork entry shoes	Cantilever racking components type ES226–227
> Multi-purpose containers MB 105	Cantilever racking components type L and S. 218–219
Add-on support stands	Cantilever racking
> Heavy duty pallet dollies	for heavy duty applications222–223
Aluminium folding steps234–235, 241	Cantilever racking
Aluminium folding trolleys	for light duty applications
Anchor bolts > Boltless shelving	Cantilever racking type L.S213–215
Anchor bolts > Wide span shelving 178, 186, 200	Cantilever racking type S216–217
Anti-slip matting > Heavy duty containers SL 115	Cantilever trolleys318–319
Archive shelving130–131	Carry/safety handle33
	Carry/safety handle > Storage and handling bins
В	RK, C-item bins CTB
_	Carton live storage Flex206–209
Back cladding159, 314	Case studies
Back cladding > Boltless shelving	Cash & Carry trolleys
Back cladding for workbenches > Workbenches 337	Chain links
Back stop beam > Pallet racking	Chipboard decking > Pallet racking 188
Barcoded security seals	C-item bins CTB 30 ,31–33
> Multi-purpose containers MB81, 88, 99,	C-item bins CTB > Kanban bin shelving for small parts,
	Mobile Kanban bin shelving for small parts 32
Beams	Cloakroom bench seats
Beams > Pallet racking	Collars > European size stacking containers BN 59
Belt barrier posts	Column guards > Pallet racking 178, 192, 267
Bend segments > Roller conveyors325–326 Bin racks23	Complete levels
Bin racks and bin trolleys	Complete levels > Pallet racking210–211
Bin shelves for loose goods	Complete levels > Wide span shelving
Bin shelves for loose goods > Boltless shelving 164	Computer desktops > BITO TEC
Bin suspension rails > Louvered panels 19	Computer workstation, sitting and standing use
Bin trolleys23, 139	> BITO TEC
Bins & containers10-11, 122	Configuration options for drawer cabinets369, 371
BITO TEC332–335	Connector beams > BITO TEC
Board/panel trucks	Connector beams > Cantilever racking components
Bolt tensioners > Wire-mesh partitions	type L and S219 Connector beams > Cantilever racking type ES 226
Boltless shelving	Connector clips > Multi-purpose containers MB 88
complete with RK bins40–41, 145	Connectors for back-to-back shelving
Boltless shelving	> Boltless shelving
complete with CK hine 04 41 146 147	Containers for automated systems 60



	800 x 600	100	100	110
	Containment shelving			
	Cool packs for chilled and frozen product			
	Corner buffering			
	Corner shelving			
	Covers for palletised loads			
	Cross bracing > Boltless shelving			100
	Cross bracing > Cantilever racking comp type L and S	onem	.5	210
	Cross bracing > Cantilever racking type I			
	Cross dividers > Insert bins			
	Cross dividers > Storage and handling bi			
	Cross dividers > Storage and handling bi			
	Cross dividers > Wide span shelving			
	Cross dividers CQT > C-item bins CTB			
	Cube lockers			
	Custom-assembled tilt-open container m			
	Cut out moulded inserts for components			
	Cutter units > BITO TEC			
	Cutter units > BitO 120			004
r				
L)			
	Decentralised target manitoring for LEO	ohiol	00	200
	Decentralised target monitoring for LEO v Display pallets K9			
	Display storage systems			
	Display systems			
	Distribution trays DT 640			
	Distribution trays DT 670			
	Distribution trallove now cumplied with			. / 1
	Distribution trolleys now supplied with TPE tyres as standard			295
	Divider bars > Racks for vertical storage			
	Divider bars > Sheet material stands and			
	Divider bars for long goods > Boltless sh			
	Document clips		,	
	> European size stacking containers			. 59
	Document pockets	2	273-	275
	Document pockets			
	> Multi-purpose containers MB	68	, 88,	95,
	-	105,	115,	273
	Document pockets > Small parts containers KLT		105	070
	Document pockets from rigid PVC Door modules, 1 wing > Wire-mesh parti			
	Door modules, 2 wings > Wire-mesh part Drawer blocks > Workbenches			
	Drawer blocks with 3 drawers > Shelving			
	Drawer blocks with 7 drawers > Shelving			
	Drawer cabinets			
	Drop-on lid	000-0	000,	370
	> European size stacking containers X	ı		27
	Drop-on lid			
	> Heavy duty containers SL	57,	109,	115
	Drop-on lid	,	,	
	> Multi-purpose containers MB	81,	88,	105
	Drop-on lid > Pallet boxes			118
	Drop-on lid > Stack and nest containers	DSL		100
	Drop-on lid > Stack and nest containers			
	Drop-on lid > Stack and nest containers			
	Drop-on lids			
	> European size stacking containers X	L	27	, 57
	Drop-on lids > Folding boxes EQ			. 95
	Drop-on lids > Folding distribution boxes	MFB		. 97
	Drop-on lids > Small parts containers KL	T		. 68

Drop-on lids > Storage bins SK
> European size stacking containers BN29, 59 Drum pallets
> European size stacking containers XL
Easy peel label holders
Easy peel label holders > C-item bins CTB
Easy peel label holders > Multi-purpose containers MB
End stop plates > Roller conveyors328–329 End stops/dividers for cantilever arms
> Cantilever racking components type L and S219 ESD table trolleys
European size stacking containers
Containers BN
European size stacking containers XL with double base53, 107–109
European size stacking containers XL with perforated base and sides50–51
European size stacking containers XL with ribbed base RX
European size storage bins and containers
Extension bays for pallet racking > Pallet racking
Fixing elements > Spill prevention systems
Flexible column and pole protectors
Flexible end-of-rack barriers
Flexible pedestrian guard railing 260
Flexible safety railing
Flexible traffic railing "Plus"261
Flexible upright protectors
Flexi-posts
> Cantilever racking components type L and S219 Folding boxes EQ
Folding bulk containers 120
Folding containers
Folding pallet boxes119
Folding sack trucks



Four sided platform trucks	Individual containers for tilt-open container modules
Four sided platform trucks - Grey Edition311	> Display storage systems42
Frame extension > Pallet racking	Individual drawers
Framed sign holders278	> BITO TEC, Workbenches 334, 337
Frames155–157, 176	Individual drawers > Drawer cabinets "Premium Line"369, 371
Frames for boltless shelving	Individual drawers > Shelving
> Boltless shelving	Individual modules
> Wide span shelving176	> Unit load order picking210–211
Full sheet dividers > BITO TEC	In-house transport280-281, 300, 329
Full sheet dividers > Shelves, 40 mm high 163	In-line posts for fencing rows
Further accessories166–167	> Pallet racking
	Insert bins
G	> European size stacking containers XL
Garment hanging kits > Boltless shelving 166	Insert bins
Garment lockers	> European size stacking containers XL,
Garment lockers/File lockers	Small parts containers KLT
General purpose trolley	Insert bins > Small parts containers KLT
Grip closures	Insertable cool boxes for chilled and
> European size stacking containers BN 59	frozen products
Grip closures	Insertable windows
> European size stacking containers XL 57	> European size stacking containers BN 29
Guide roller315	Insertable windows
	> European size stacking containers XL 27, 109 Insertable windows > Storage bins PK
Н	Insertable windows > Storage bins 1 K
Hand pallet truck with scissor lift	Intermediate drop-in-layers
Hand pallet trucks	> Heavy duty containers SL115
Hand pallet trucks > Heavy duty containers SL 115	
Handle117	J
Handles	
> European size stacking containers XL, European size stacking containers BN 27, 29	Janitorial lockers
Handles > Storage bins PK	Janitorial, garment and file lockers354–355
Handles > Storage bins FK	V
Handrails for double sided access	K
> Warehouse steps	Kanban bin shelving for small parts34, 144
Handrails for single sided access	Kick steps
> Warehouse steps	1101 010 010 010 010 010 010 010 010 01
Heavy duty containers SL	I
Heavy duty hoop barriers265–266	-
Heavy duty pallets K2 with feet121	Label covers
Heavy duty roller tracks	> European size stacking containers BN29, 59
Heavy duty shelving type S - shelf load 300 kg135	Label covers > Small parts containers KLT,
Heavy duty workbenches338–343	European size stacking containers XL 57, 68, 109
Hemispherical mirrors 360°	Label covers > Storage and handling bins RK 38
Hinge clips for lids > European size stacking containers BN29, 59	Label covers > Storage bins SK 19
Hinged doors167	Label frames > Folding distribution boxes MFB 97
Hinged doors > Boltless shelving167, 337	Label holders
Hose shelving139, 148	Label holders > Heavy duty containers SL
Housing for drawer cabinets369, 371	Labels
Hydraulic stackers	Labels > European size stacking containers XL, Small parts containers KLT27, 68
1	Ladder mounting rail, steel > Steps & shelving access
-	ladders
Identification & safety252–253, 258	
	Lane marking tape "flex"
Impact protection barriers	Lane marking tape "robust"
Impact protection bollards	Lane marking tape "robust"
	Lane marking tape "robust"



LEO Lecekius OAV medica mbum
LEO Locative 24V mains plug > LEO Locative Drop-off stations, LEO Locative
Pick-up stations, LEO Locative Twin stations 288
LEO Locative Batteries 24V
LEO Locative buffer lanes
LEO Locative Chargers
> LEO Locative Batteries 24V
LEO Locative lane marking tapes - ultra 288
LEO Locative set 1
LEO Locative set 2
LEO Locative set 3
LEO Locative station transmitter, boltless fitting
> LEO Locative Twin stations
LEO Locative track planning template
> LEO Locative lane marking tapes 288
LEO Locative transfer stations
LEO Locative vehicles282, 285, 288
LEO Locative vehicles
> Platform accommodates loads sized
200 x 350 mm min. to 600 x 400 mm max 285
LEO Starter package "Pick-up & drop-off stations" 284
LEO Starter package "Twin stations"
Level decking options to fit BITO-TwinTop® beams
Level decking options to fit BITO-TwinTop® beams
> Pallet racking
Lids > Folding pallet boxes
Lift-up gates > Roller conveyors 325, 327
Light duty pallets K8 with feet121
Light duty shelving type EL
- shelf load 100 kg132
Light duty shelving type L
- shelf load 100 kg133, 152
Light duty steel barriers
Line marking applicators
Line marking paint
Load retention plates > Cantilever trolleys318-319
Locking clips > Multi-purpose containers MB 88, 105
Locking options > Retrofit drawers
Locking systems BS
Longitudinal dividers > Insert bins
Longitudinal dividers
> Storage and handling bins PK
Longitudinal dividers > Storage and handling bins RK
Longitudinal dividers > Storage bins SK
Louvered panel kits complete with bins
Louvered panels
Louvered panels > Storage bins SK
Louvered panels
> Storage bins SK, Boltless shelving 22, 158
Louvred panel uprights > Louvered panels
•
Л

•
Magnetic document holders271
Magnetic document holders "Security" 272
Magnetic document pockets
Magnetic label holders
Magnetic label pouches
Mandrel kits > BITO TEC
Manual stackers294
Marking board314
Marking tape dispensers255
Marking tapes255
Medium duty shelving type M - shelf load 200 kg134




	Memo board314
	Mesh sided platform trucks 301
	Mobile access platforms238-239
	Mobile aluminium access ladders
	Mobile aluminium access platforms 240
	Mobile aluminium platform ladders 236
	Mobile Kanban bin shelving for small parts145
	Mobile workbenches
	Modular stacking containers EMB 44-45
	Modular workbenches339–340
	Multi-purpose containers
	Multi-purpose containers MB Food & Delivery80-81
	Multi-purpose containers MB
	Multi-purpose containers MB
	- insulation accessories 82–83
	Multi-purpose containers MB
	- Mail custom solution 82
	Multi-purpose containers MB
	- special applications90
	Multi-purpose containers MB Eco 86–87
	Multi-purpose containers MB
	with double base79, 104
	Multi-purpose containers MB
	with ribbed base
	Multi-purpose containers MB
	"Mobile Office"
	Multi-purpose hanging rails > BITO TEC
	Multi-trip transport solution
	Multi-trip transport solution
	for bins and containers45, 59, 68, 88,95, 109, 115
	95, 109, 115
N	
r	•
ľ	Nesting and folding containers 72, 92, 98, 100
ľ	•
	Nesting and folding containers 72, 92, 98, 100
•	Nesting and folding containers 72, 92, 98, 100
	Nesting and folding containers 72, 92, 98, 100
	Nesting and folding containers
C	Nesting and folding containers
	Nesting and folding containers
C	Nesting and folding containers

Panelled platform trucks	
Pipework buffering	
Plastic chains	
Plastic deck trolleys	
Plastic pallets	
Plastic trays70	-7^{1}
Platform steps	.241
Platform trolleys	
Platform trolleys - Grey Edition	
Platform trolleys / Platform trucks / Table trolleys - Grey Edition	210
Platform trucks / Table trolleys / Shelf trolleys 312-	
Platform trucks with folding handle	
Platform trucks with four sides302–	200
Platform trucks with one short side 302–303,	
Platform trucks with three sides302–303,	
Platform trucks with tubular handle 296, 300,	
Platform trucks with tubular handle - Grey Edition	
Platform trucks with two short sides302–	
Platform trucks with wire mesh sides	302
Platform trucks with wood panel sides	303
Post and chain kits	258
Post mounted signs Posts > Wire-mesh partitions	259
PRO Pallet racking	-181
Product feeder panels CDS > C-item bins CTB	33
Protective caps > Unit load order picking	205
Pull-out units	190
Pull-out units – designed for ergonomic working > Pallet racking	101
Push-back protection > Unit load order picking	205
The same processing the same state processing the	
2	
Rack end barrier190-191, 267-	268
Rack end barrier > Pallet racking191,	
Racks for sheets and boards	228
Racks for vertical storage220-	
Rails for A4 hanging files	
> Multi-purpose containers MB	88
Ramp edges	
Rear upstands > Workbenches	
Retrofit drawers	169
Roll containers with wire mesh sides	
Roll forward tipping skips	
Roller conveyor segments 198–199, 324,	326
Roller conveyor segments suited for hand pallet truck retrieval	100
Roller conveyors	30
Roller track braces > Unit load order picking	
Roller track connectors > Unit load order picking	
Roller track segments	
Roller tracks	
1101101 (140110)	200
6	
Cook trucks	00
Sack trucks	
Safety bunds	
Safety equipment	
Scanner holder	
Scissor lift table	
Security mirrors	208
> European size stacking containers XL,	
Multi-purpose containers MB.	
Hoovy duty containers CI 00 105	100




Security seals
> European size stacking containers XL, Small parts containers KLT57, 68
Small parts containers KLI
Security seals > Folding boxes EQ
Security seals > Folding distribution boxes MFB 97
Security seals > Multi-purpose containers MB 57, 81, 88
> мин-purpose containers мв
Self-adhesive document holders
Self-adhesive document holders "Security" 270–272
Self-adhesive hazard warning tape
Self-locking push handle > Heavy duty pallet dollies
Self-tipping skips
Service hatches > Wire-mesh partitions
Sheet material stands
Sheet material stands and trolleys
Sheet material trolleys319
Sheet/plate racks
Sheet/plate racks for oddments
Shelf clips > Additional shelves
Shelf dividers
Shelf dividers > Shelves, 25 mm high 163
Shelf ledges $>$ Boltless shelving 160, 166–167
Shelf levels > BITO TEC
Shelf levels with wire-mesh infill314
Shelf trolleys307–309, 313
Shelf trolleys - ESD version312
Shelf trolleys - Grey Edition 31
Shelf trolleys / Four sided platform trucks / Pallet trolleys - Grey Edition31
Pallet trolleys - Grey Edition31
Shelves
Shelves
> Cantilever trolleys and mobile tool racks318
Shelves, 40 mm high > Shelving 150
Shelving 128, 130, 132, 139-140
146–147, 154, 170
Shelving & Racking
Shelving & racking protection 191–192, 267
Shelving access ladders and A-frame ladders 232
Shelving access ladders from aluminium $\dots 232-233$
Shelving for industry requirements
- accessories
Shelving with extra large chipboard shelves 136–137
Shelving with extra large steel shelves
Shelving with inclined shelves138
Shelving with wire shelves15
Shims > Boltless shelving157
Shims > Pallet racking
Shims > Wide span shelving178
Shock absorbing bumpers
Short side safety lock
> Folding distribution boxes MFB97
> Folding distribution boxes MFB

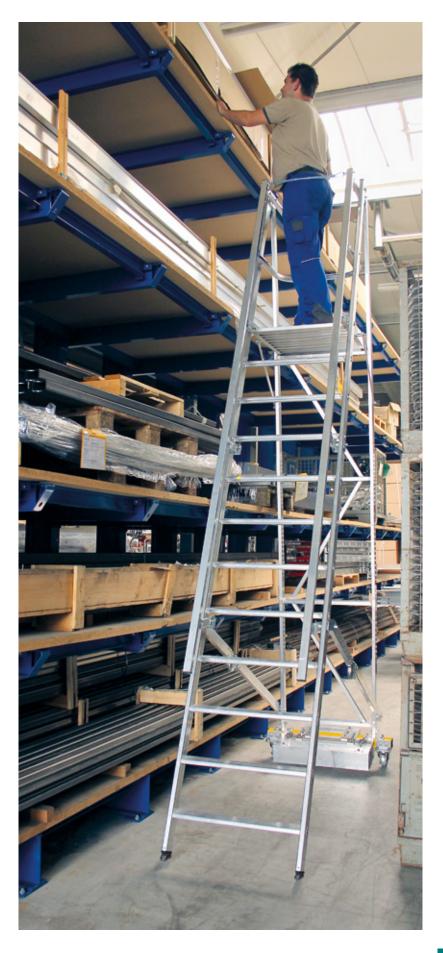


TI LI SIMILI III MD 00
Thermo-inlays > Multi-purpose containers MB 82
Tilt-open container modules 42–43
Tipping skips
Tool kit for adjusting flexible buffer profiles
> Flexible upright protectors
TOTALSTOP central locking system
TOTALSTOP central locking system
> Four sided platform trucks, Platform trucks, Platform trucks with tubular handle, Table trolleys,
Shelf trolleys, Cantilever trolleys, Dollies,
Order picking trolleys295
Tow bar and coupling pin315
Tow bar and coupling pin
> Heavy duty pallet dollies
Towing coupler
> Skatewheel expandaveyors
Track end guard > Unit load order picking 200
Traffic and pedestrian control
Transport dolly
Transport dolly
> Containers 800 x 600 mm27, 57, 97, 115, 320
Transport dolly
> Multi-purpose containers MB
Transport dolly > Multi-purpose containers MB 600 x 400 mm81, 88, 320
Transport dolly > Stacking containers
600 x 400 mm / 400 x 300 mm27, 45, 57, 59,
Tray shelves > Containment shelving165, 251
Trays70
Trays XLT 71
Trays XLT-P71
Trough inserts > Retrofit drawers
Tubular cantilever arms > Cantilever racking
components type L and S213 Tubular steel push handle
> Heavy duty pallet dollies
Twin support stands
Twin support stands > Roller conveyors 327
Tyre beams > Boltless shelving 153, 162
Tyre shelving 139, 153–154
Tyre trucks
U
Universal beams > Boltless shelving
Universal lane dividers > Unit load order picking210
Upright caps > Boltless shelving 166
Upright protectors > Pallet racking 192, 267
Upright protectors > Pallet racking
Upright protectors > Pallet racking 192, 267
Upright protectors > Pallet racking



Wide span shelving
Wide span shelving – coordinating products179
Wire baskets > Shelving, Boltless shelving with wire baskets
Wire divider with label holder
> Racks for vertical storage
Wire dividers315
Wire dividers
> Boltless shelving with wire baskets 150, 165
Wire shelves > Shelving
Wire shelves GRID161
Wire shelves GRID > Boltless shelving
Wire-mesh back cladding > Pallet racking 178, 194
Wire-mesh partitions
Wire-mesh side cladding for frames
> Wide span shelving176
Workbenches
Workstation frames > BITO TEC
Workstation systems
Workstations > BITO TEC
Worktops > BITO TEC
WOIKtops > BITO TEO
V
X
XLmotion containers for automated systems60-61
Action containers for automated systems00-01
7
_

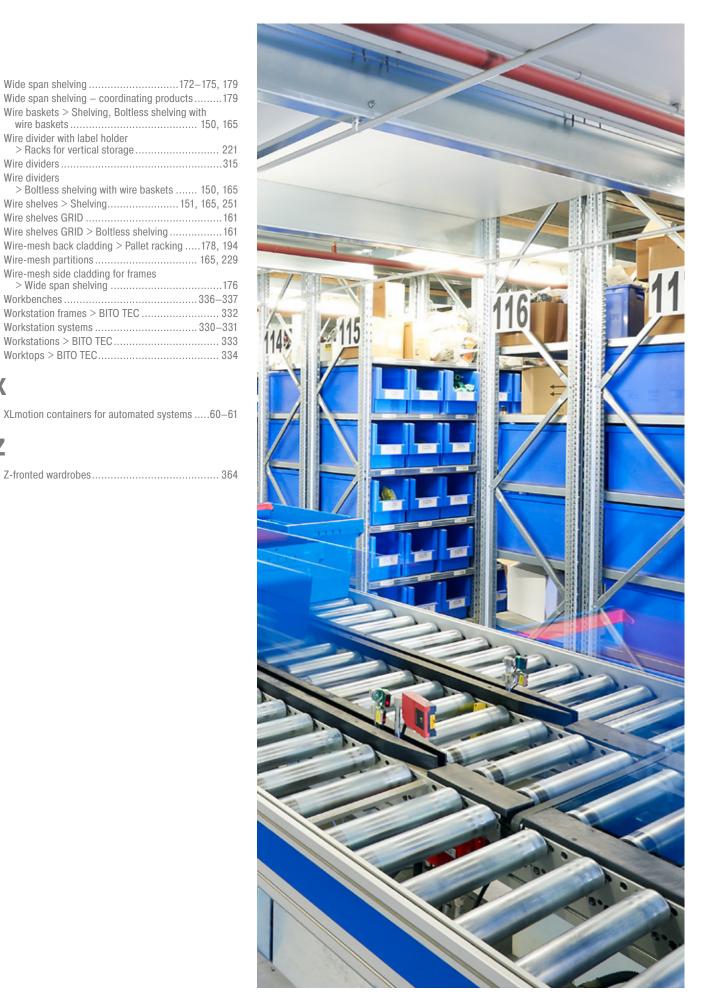



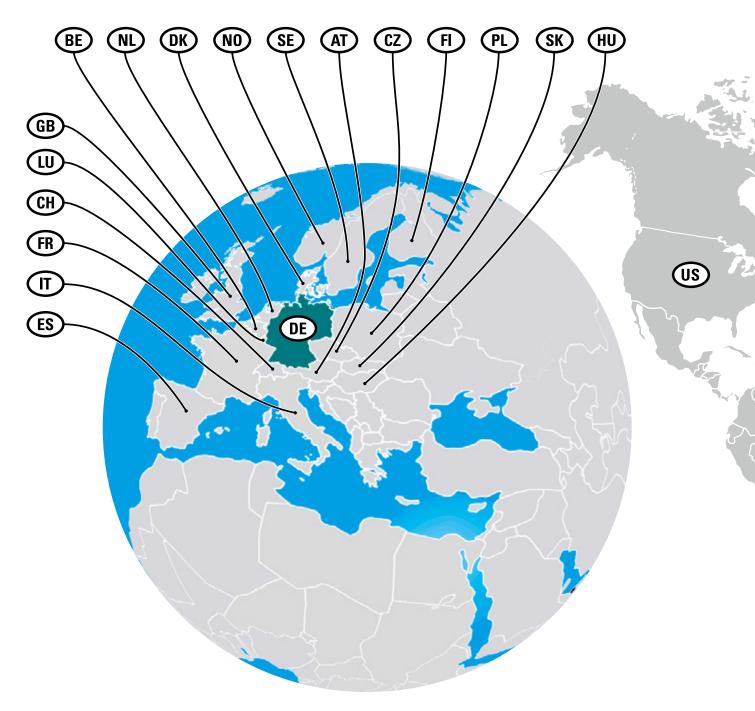



BITO-Lagertechnik Bittmann GmbH Postfach 200 D-55587 Meisenheim Tel.: +49 67 53 122-0 +49 67 53 122-399 E-Mail: info@bito.com www.bito.com



BITO Lagertechnik Austria GmbH Handelsring 5a A-4481 Asten

Tel.: +43 72 24 655 55-0 Fax: +43 72 24 655 55-20 E-Mail: info.at@bito.com www.bito.com

(BE)(NL)

Hoofdkantoor België: BITO Systems nv **Boomsesteenweg 97** B-2630 Aartselaar Tel.: +32 3 870 99 00 +32 3 870 99 01

E-Mail: info.BE-NL@bito.com www.bito.com

Kantoor Nederland: BITO Systems nv Bredaseweg 185 NL-4872 LA Etten-Leur +31 30 711 30 90 Fax: +31 30 711 30 91 E-Mail: info.BE-NL@bito.com

www.bito.com

(CH)

BITO-Lagertechnik Bittmann AG Industriestrasse 11 CH-6343 Rotkreuz Tel.: +41 41 7 90 20 64 +41 41 7 90 43 28 E-Mail: info.ch@bito.com www.bito.com



BITO SYSTEMES 1, avenue des 22 arpents F-77230 MOUSSY-LE-NEUF Tél.: +33 1 72 84 90 20 Fax: +33 1 72 84 90 30 E-Mail: info.fr@bito.com www.bito.com

(GB)

BITO STORAGE SYSTEMS LTD Finch Way, Hemdale Business Park Nuneaton GB-Warwickshire CV11 6WH

Tel.: +44 24 7638 8850 +44 24 7638 8860 E-Mail: info.uk@bito.com www.bito.com



BITO Italia SRL Via Marzabotto, 4 I-10095 Grugliasco (TO) Tel.: +39 011 90 63 242 +39 011 74 35 027 Email: info.it@bito.com www.bito.com





Hestehaven 21 I DK-5260 Odense S Tel.: +45 70 21 51 51 Fax: +45 65 90 52 41

E-Mail: info.dk@bito.com

www.bito.com

(FI)

BITO Varastotekniikka Äyritie 12 B FI-01510 Vantaa Tel: +358 10 324 6510 Fax: +358 9 8700 1131 E-Mail: info.fi@bito.com

(PL)

BITO Polska Sp. z o.o. Ul. Połczyńska 116A 01-304 Warszawa

Tel.: +48 22 666 22 20 wew. 21 +48 22 666 22 21 E-Mail: info.pl@bito.com

www.bito.com

Florettgatan 29c SE-254 67 Helsingborg Tel: +46 (0) 42 151910 E-Mail: info.se@bito.com www.bito.com



BITO Skladovacia technika s.r.o Sládkovičova 757/38A SK-95701 Bánovce nad Bebravou Tel.: +421 38 760 00 86

+421 38 760 00 88 Fax: Mail: info.sk@bito.com www.bito.com



BITO Raktártechnika Kft. Könyves Kálmán Körút 12 - 14. HU-1097 Budapest Tel.: +36 1 421 5385 E-Mail: info.hu@bito.com www.bito.com

Hellenvegen 22 NO-2022 Gjerdrum Tel: +47 6393 5200 Fax: +47 6393 5201 E-Mail: info.no@bito.com

www.bito.com



BITO skladovací technika CZ s.r.o. Sezemická 2757/2 Horní Počernice CZ-193 00 PRAHA 9 Tel.: +420 270 006 021 +420 270 006 022 E-Mail: info.cz@bito.com

www.bito.com



BITO Storage Solutions US, Inc. 8314 Sherwick Ct 20794 Jessup (MD) Tel.: +1 410 892 6658 E-Mail: sales@us.bito.com www.bito.com

Parque Empresarial @Sant Cugat Av. Vía Augusta 15-25, Edif. B2, Pl. 9 E-08174 Sant Cugat del Vallés

(Barcelona) Tel.: +34 93 557 10 20 +34 93 557 10 21 Email: info.es@bito.com www.bito.com

(AE)

BITO STORAGE SYSTEMS MIDDLE EAST DWC-LLC

Dubai World Central Logistics City DUBAI, UNITED ARAB EMIRATES Tel: +971 4887 9027

Fax.: +971 4887 9754 E-Mail: info.ae@bito.com

www.bito.com



Contact




CONTACT US

- send your comments, requests and ideas to our sales centre
- + call our info hotline on +49 6753 122-0
- + ask our hotline team to assist you in finding the sales person who is in charge of your region

Ask for the sales person who takes care of your region!

VISIT US ON WWW.BITO.COM

- + for online ordering
- + for requesting comprehensive info material
- for viewing case studies of storage and order picking systems realised by BITO
- + for keeping up to date on BITO news
- + for downloading instructions of assembly and use

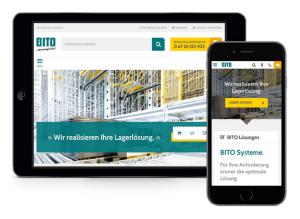



REQUEST INFO MATERIAL

- + BITO Image brochure
- + BITO Project Guide on storage and order picking systems
- + DVD on BITO storage systems
- + Instructions for assembly and use, product data sheets
- + Special interest product brochures

Social Media Connect now















1980 First boltless shelving

1959 First BITO bin from steel sheet

1870 Production of hollow metal spheres

1845 Company foundation & production of metal ornaments and fittings



From hollow spheres to automated guided vehicles.

Every milestone brings us a little closer to the future.

